

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192160010](#)
Status: **Active**
Description: Ultimate Wire Tap, Blue, 14-18 AWG

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
UL E79133

General

Product Family IDT and Solder Connectors
Series [19216](#)
Crimp Quality Equipment Yes
MolexKits Yes
Product Name Wire Tap

Physical

Circuits (Loaded) 1
Color - Resin Natural
Durability (mating cycles max) 25
Flammability 94V-2
Gender N/A
Glow-Wire Compliant No
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Resin Nylon
Number of Rows 0
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface (in) 0.000 In
Pitch - Mating Interface (mm) 0.00 mm
Pitch - Term. Interface (in) 0.000 In
Pitch - Term. Interface (mm) 0.00 mm
Polarized to Mating Part Yes
Stackable No
Temperature Range - Operating 105°C
Wire Insulation Diameter N/A
Wire Size AWG 14, 16, 18

Electrical

Voltage - Maximum 600V

Material Info

Old Part Number WT-1814

Reference - Drawing Numbers

Sales Drawing SD-19216-001

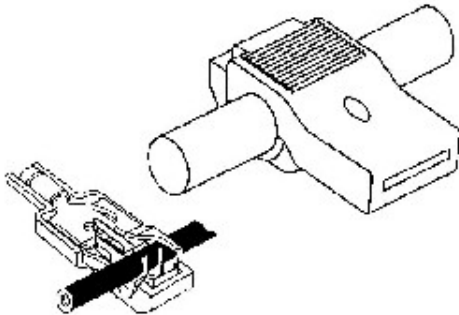


image - Reference only

Series

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?


Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[19216Series](#)




Mates With
Male Quick Disconnect

10	9	8	7	6	5	4	3	2	1
MATERIAL NO.	ALTERNATE NO.	WIRE RANGE AWG(mm2)	HOUSING COLOR						
192160011	WT-2218	22-18(.34-.75)	RED						
192160010	WT-1814	18-14(.75-2.5)	BLUE						
192160009	WT-12	12(4.0)	YELLOW						

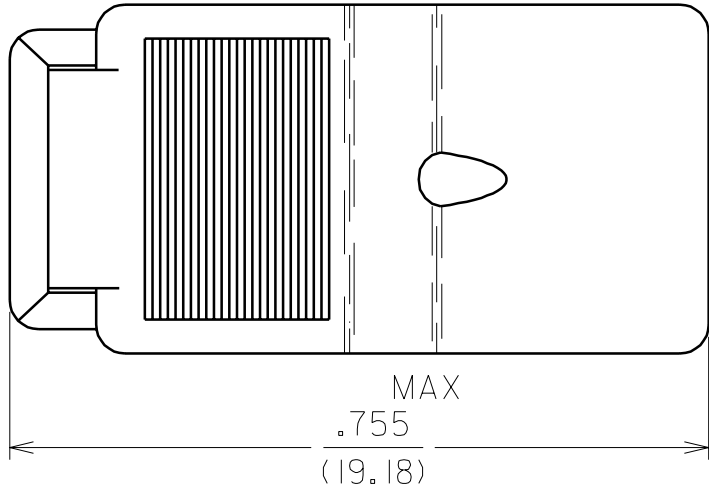

INSULATION HOUSING SUPPORT RIBS

ASSEMBLED ON WIRE

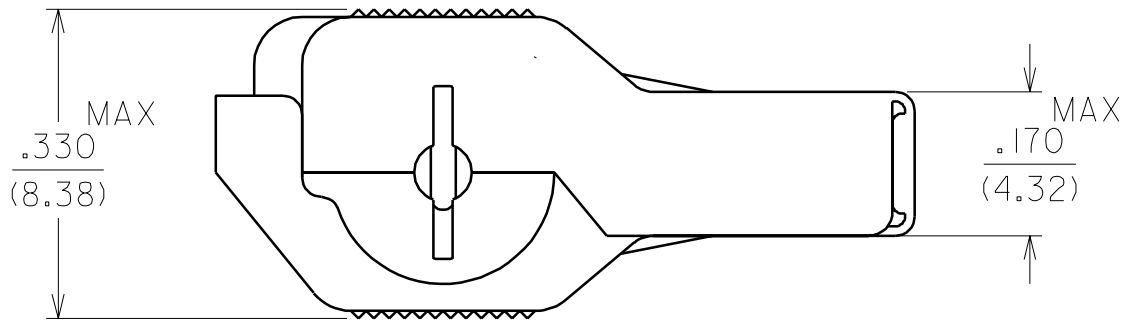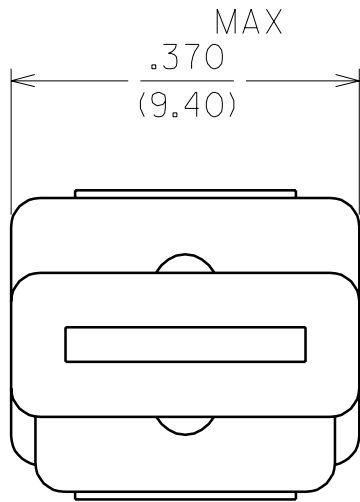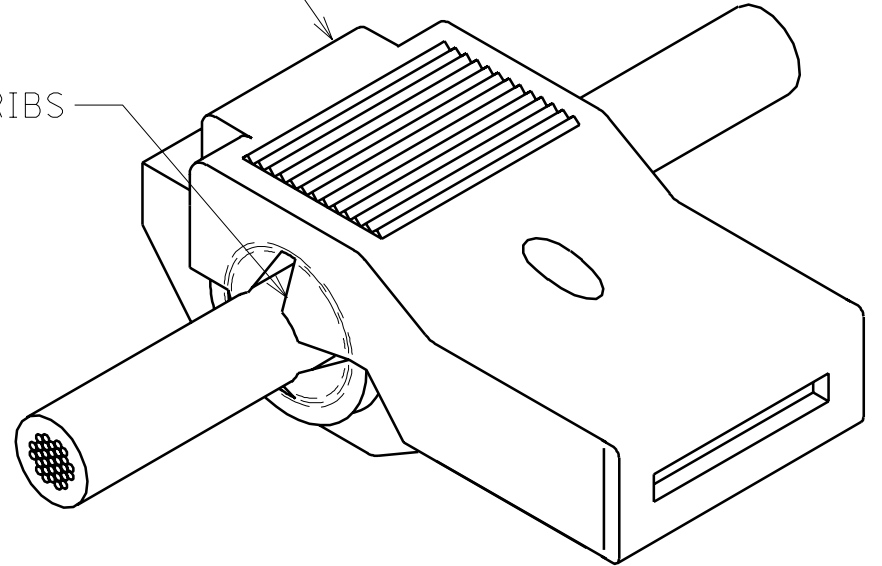

NOTES:

1. MATERIALS

HOUSING: UNFILLED NYLON UL FLAMMABILITY

RATING 94V-2


COLOR: SEE TABLE

TERMINAL: COPPER ALLOY

2. FINISH

TERMINAL: TIN

CLOSED POSITION AFTER ASSEMBLY ON WIRE

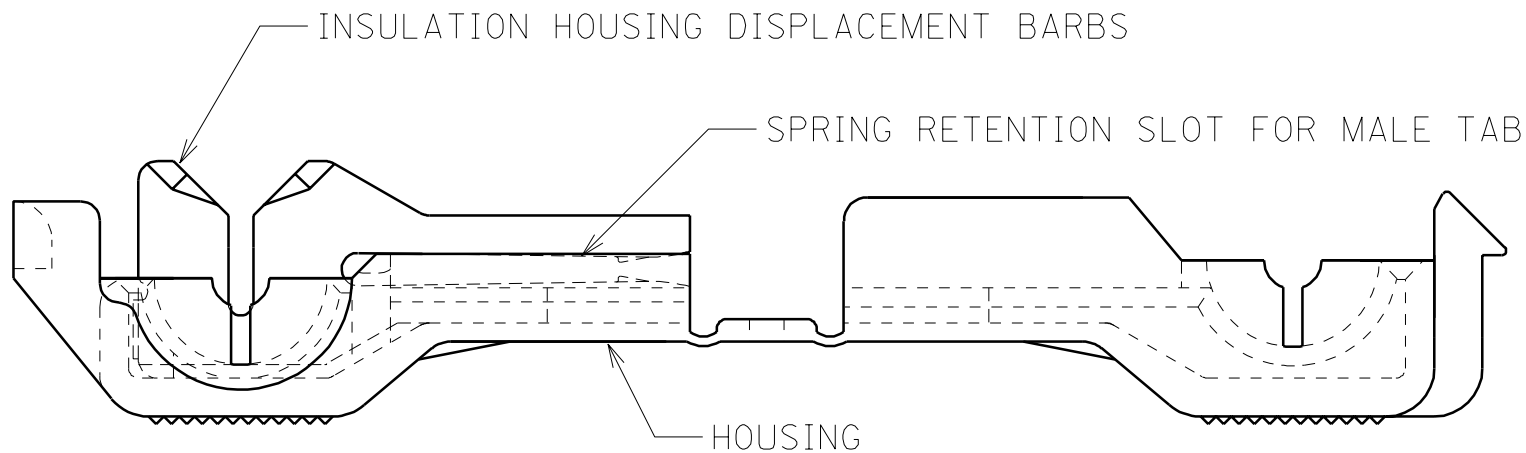

OPEN POSITION PRIOR TO ASSEMBLY ON WIRE

B	VOIDS DWG. WT-CD ETC2000-0001 HEB 99/7/2
A	SEE ECN* 1137 09/08/94 RCM
LTR.	REVISIONS

CUSTOMER DRAWING

DIMENSIONS SHOWN (METRIC) INCH				REVISE ONLY ON CAD SYSTEM				
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°				TITLE WIRE TAP MULTIMATE				
				molex ETC INC. PINELLAS PARK, FLA. 33781 U.S.A.		SHEET NO. 1 OF 1	DATE 09/07/94	
				PART NO. SEE TABLE		DRWG. NO. SD-19216-001		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX-ETC INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				
DRWG. BY APP'D. BY	RCM FP	CHK'D. BY SCALE	JM 5: 1	FILE NAME 19216001 SD	DIV. ETC			
				SIZE B				