

X02 Series

High Temperature | Heavy Duty | Rear Panel Mount

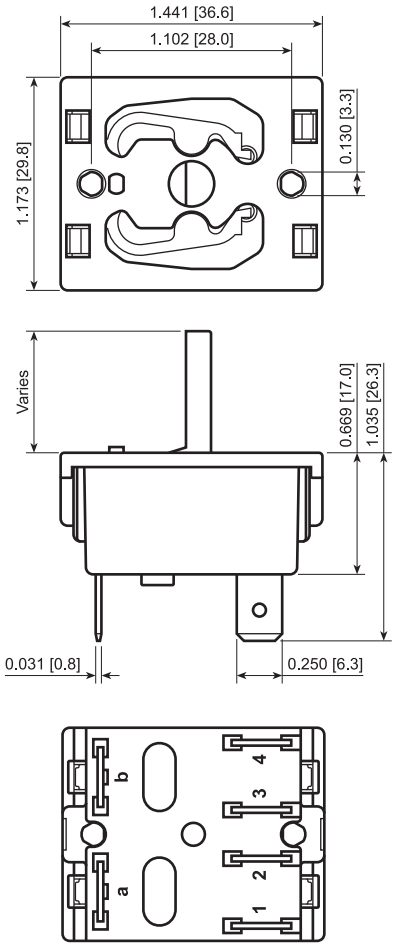

Mounting Options

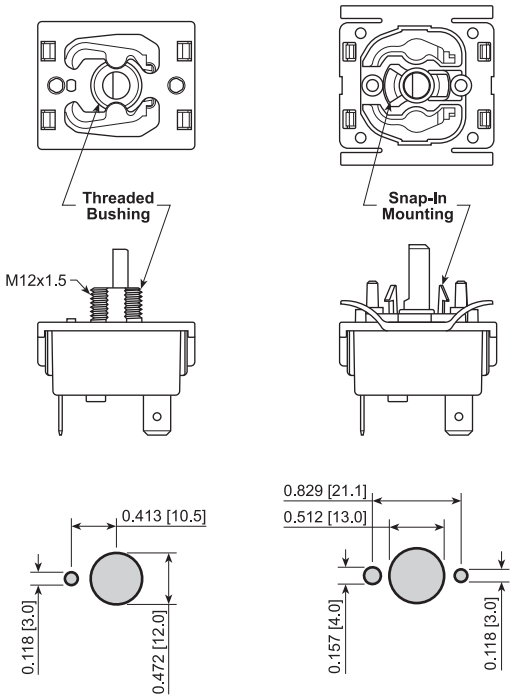

FEATURES:

- Up To 4 Circuits
- Multiple Terminal & Actuator Options
- Housing Made of Rugged Glass Reinforced Nylon


SPECIFICATIONS:

Rating: 10A 125VAC [cULus]
1/4HP 125VAC [cULus]
10(3)A 250V [ENEC]
6(1.8)A 400V [ENEC]

Electrical Life: 300,000 Cycles
Temperature Rating: -20°C to 125°C
Contact Resistance: 35mΩ Max. at 50VAC
Insulation Resistance: 100MΩ Min. at 500VAC
Dielectric Strength: 1,500VAC for 1 Minute

MATERIALS:

Body: Polyamide 6/6, UL94 V-2
Actuator: Polyamide 6/6, UL94 V-2
Contacts: Silver
Mobile Contacts: Silver
Terminals: Silver Plated Brass
Springs: Piano Wire
Copper
Hardware: Brass

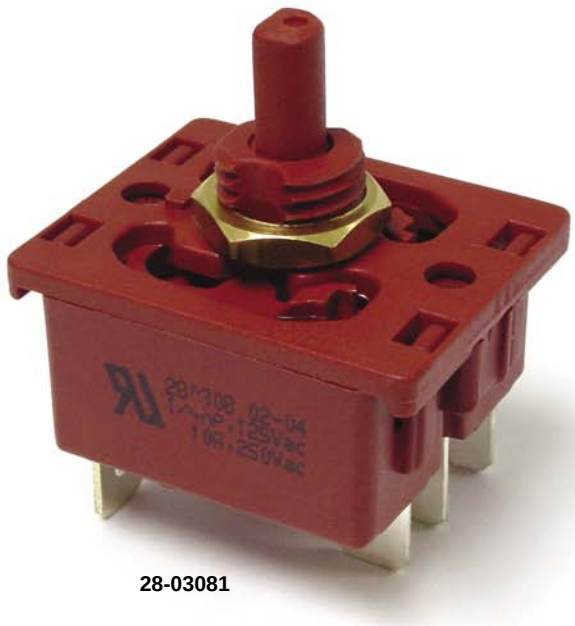

28-03081



24-03A2

EXAMPLE PART NUMBERS:

28-03081 ***1P3T***
45° Index, 1: AB1, 2: AB2, 3: AB3

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ROTARY