

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI



X 700 with clamping flange

Features

- Encoder single- or multiturn / SSI / ATEX
- Optical sensing
- Resolution: singleturn 14 bit, multiturn 12 bit
- Clamping flange / shaft $\varnothing 10$ mm
- Explosion protection per EEx d IIC T6
- Area of application: EX I/II 2 GD / ATEX 133213X
- Device class 2 / zone 1 (gas), zone 21 (dust)
- Electronic setting of zero point
- Counting direction input

Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 50 mA (24 VDC)
Initializing time (typ.)	20 ms after power on
Interface	SSI
Steps per turn	16384 / 14 bit
Number of turns	4096 / 12 bit
Absolute accuracy	$\pm 0.025^\circ$
Sensing method	Optical
Code	Gray or binary
Code sequence	CW/CCW coded by connection
Inputs	SSI clock Control signals UP/DOWN and zero
Output circuit	SSI data linedriver RS485 Diagnostic outputs push-pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Diagnostic functions	Self-diagnosis Code continuity check Multiturn sensing
Approval	UL approval / E301461

Technical data - mechanical design

Housing	$\varnothing 70$ mm
Shaft	$\varnothing 10$ mm (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 67
Operating speed	≤ 6000 rpm (mechanical) ≤ 6000 rpm (electric)
Starting torque	≤ 0.4 Nm
Admitted shaft load	≤ 60 N axial ≤ 50 N radial
Materials	Housing: stainless steel Flange: stainless steel
Operating temperature	$-25...+60$ °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	1300 g
E-connection	Cable 2 m (other length upon request)

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Part number


Singleturn

X 700.	A	1		12	02
				12	E-connection Cable 2 m, axial
					Voltage supply / signals
			0		10...30 VDC / gray code 13 bit
			2		10...30 VDC / binary code 13 bit
					Flange / Shaft
			1		Clamping flange / ø10 mm IP 67
					Design
	A				Singleturn

Multiturn

X 700.	M	1		12	02
				12	E-connection Cable 2 m, axial
					Voltage supply / signals
			1		10...30 VDC / gray code 25 bit
			2		10...30 VDC / binary code 25 bit
			4		10...30 VDC / gray code 24 bit
					Flange / Shaft
			1		Clamping flange / ø10 mm IP 67
					Design
	M				Multiturn

Data transfer

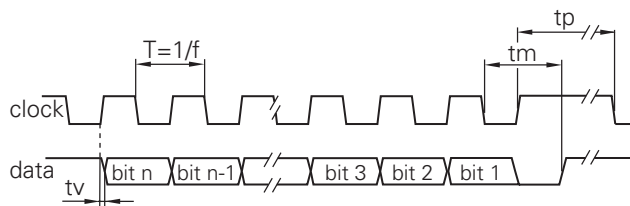

Clock frequency f	62.5...1500 kHz
Scan ratio of T	40...60 %
Time lag tv	150 ns
Monoflop time tm	25 µs + T/2
Clock interval tp	30 µs

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Terminal significance	
UB	Encoder voltage supply.
GND	Encoder ground connection relating to UB.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SS clock input. Clock+ together with clock- forms a current loop. A current of approx. 7 mA towards clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with clock+ forms a current loop. A current of approx. 7 mA towards clock- input means logic 0 in positive logic.
Zero setting	Input for setting a zero point anywhere within the programmed encoder resolution. The zero setting operation is triggered by a High impulse and has to be in line with the selected direction of rotation (UP/DOWN). Connect to GND after setting operation for maximum interference immunity. Impulse duration >100 ms.
$\overline{\text{DATAVALID}}$	Diagnostic output. An error warning is given at level Low. Important: Interferences must be drained by the downstream electronics.
$\overline{\text{DATAVALID MT}}$	Diagnostic output for monitoring the multiturn sensor voltage supply. Upon dropping below a defined voltage level the $\overline{\text{DV MT}}$ output is switched to Low.
$\overline{\text{UP/DOWN}}$	$\overline{\text{UP/DOWN}}$ counting direction input. This input is standard on High. $\overline{\text{UP/DOWN}}$ means ascending output data with clockwise shaft rotation when looking at flange. $\overline{\text{UP/DOWN}}$ -Low means ascending values with counterclockwise shaft rotation when looking at flange.

Terminal assignment	
Core colour	Assignment
brown	UB
white	GND
green	Clock+
grey	Data+
blue	Zero setting
pink	Data-
yellow	Clock-
black	$\overline{\text{DATAVALID}}$
red	$\overline{\text{UP/DOWN}}$
violet	$\overline{\text{DATAVALID MT}}$

Trigger level	
SSI	Circuit
SSI-Clock	Optocoupler
SSI-Data	Linedriver RS485

Control inputs	Input circuit
Input level High	>0.7 UB
Input level Low	<0.3 UB
Input resistance	10 k Ω

Output	Linedriver RS422
Output level High	>2.5 V (I = -20 mA)
Output level Low	<0.5 V (I = 20 mA)
Load High	<20 mA
Load Low	<20 mA

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Dimensions

