# Product data sheet

Specifications



To be discontinued

## Harmony XAP, XB2 SL, Empty control station, zinc alloy, blue, undrilled, 80 x 130 x 77 mm

XAPM24

To be discontinued on: 30 June 2022

To be end-of-service on: 30 June 2022

**Product availability : Non-Stock - Not normally stocked in distribution facility**

**Price* : 152.00 USD**

## Main

| | |
|---|---|
| **Range of Product** | Harmony XAP |
| **Product or Component Type** | Die-cast empty control station |
| **Device short name** | XAPM |
| **Product front plate size** | 80 x 130 mm |
| **Usable depth** | 2.93 in (74.5 mm) |
| **Number of cut-out** | Undrilled |
| **Colour of base of enclosure** | Blue |
| **Colour of cover** | Blue |
| **Material** | Zinc alloy |
| **Cable entry** | 1 hole with blanking plug for cable gland 0.55 in (14 mm)<br>1 hole without blanking plug for cable gland 0.55 in (14 mm) |
| **Product mounting** | Flush mounting |
| **IP degree of protection** | IP65 IEC 60529<br>IP69 NF C 20-010<br>IP69K |

## Complementary

| | |
|---|---|
| **Net weight** | 1.83 lb(US) (0.83 kg) |

## Environment

| | |
|---|---|
| **Protective treatment** | TC |
| **Ambient Air Temperature for Storage** | -40…158 °F (-40…70 °C) |
| **Ambient Air Temperature for Operation** | -40…158 °F (-40…70 °C) |
| **Electrical shock protection class** | Class I IEC 60536<br>Class I NF C 20-030 |

## Ordering and shipping details

| | |
|---|---|
| **Category** | 22475 - WALL STATIONS |

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Discount Schedule** | CS2 |
| **GTIN** | 3389110312706 |
| **Nbr. of units in pkg.** | 1 |
| **Package weight(Lbs)** | 34.64 oz (982 g) |
| **Returnability** | No |
| **Country of origin** | MA |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Package 1 Height** | 3.62 in (9.2 cm) |
| **Package 1 width** | 3.54 in (9 cm) |
| **Package 1 Length** | 6.14 in (15.6 cm) |
| **Unit Type of Package 2** | S03 |
| **Number of Units in Package 2** | 12 |
| **Package 2 Weight** | 28.10 lb(US) (12.747 kg) |
| **Package 2 Height** | 11.81 in (30 cm) |
| **Package 2 width** | 11.81 in (30 cm) |
| **Package 2 Length** | 15.75 in (40 cm) |
| **Unit Type of Package 3** | P06 |
| **Number of Units in Package 3** | 48 |
| **Package 3 Weight** | 131.15 lb(US) (59.488 kg) |
| **Package 3 Height** | 30.31 in (77 cm) |
| **Package 3 width** | 31.50 in (80 cm) |
| **Package 3 Length** | 23.62 in (60 cm) |

## Offer Sustainability

| | |
|---|---|
| **Sustainable offer status** | Green Premium product |
| **California proposition 65** | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| **REACh Regulation** | REACh Declaration |
| **REACh free of SVHC** | Yes |
| **EU RoHS Directive** | Pro-active compliance (Product out of EU RoHS legal scope)<br>EU RoHS Declaration |
| **Toxic heavy metal free** | Yes |
| **Mercury free** | Yes |
| **RoHS exemption information** | Yes |
| **China RoHS Regulation** | China RoHS declaration |
| **Environmental Disclosure** | Product Environmental Profile |
| **Circularity Profile** | End of Life Information |


## Contractual warranty

| | |
|---|---|
| **Warranty** | 18 months |

# Product data sheet XAPM24

Dimensions Drawings

## Dimensions and Fixing

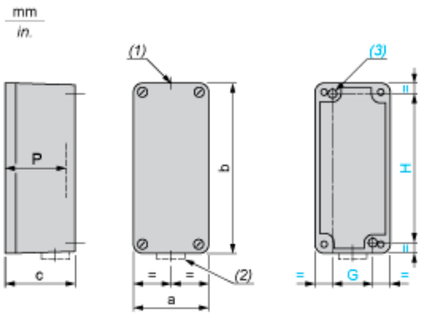


**(1)** 1 hole, without blanking plug, for cable gland with 14 mm/0.55 in. maximum clamping capacity
**(2)** 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland with 14 mm/0.55 in. maximum clamping capacity
**(3)** 2 x Ø 5.6 mm/0.22 in. holes, depth 20 mm/0.79 in.

| a | | b | | c | | G | | H | | P | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. |
| 80 | 3.15 | 130 | 5.12 | 77 | 3.03 | 50 | 1.97 | 115 | 4.53 | 74.5 | 2.93 |