Product data sheet

Specifications



Complete pilot light, Harmony XB4, Explosive atmosphere, blue LED 24 240 V

XB4BVBM6GEX

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 180.00 USD

Main

Range of Product	Harmony XB4
Product or Component Type	Complete pilot light
Device short name	XB4
Bezel material	Chromium plated metal
Fixing collar material	Zamak
Mounting diameter	0.87 in (22 mm)
Sale per indivisible quantity	1
Dust zone	Zone 21 - 22
Gas zone	Zone 1 - 2
Operator additional information	With plain lens

Complementary

Width	1.82 in (46.2 mm)
Height	1.18 in (30 mm)
Depth	2.72 in (69 mm)
Net Weight	0.18 lb(US) (0.083 kg)
Device mounting	Fixing hole 0.89 in (22.5 mm) +/- 0.2 mm EN/IEC 60947-1
Fixing center	>= 30 x 40 mm support panel) 0.04…0.24 in (1…6 mm)
Embedding Depth	2.28 in (58 mm)
Marking	II 2 GD Ex tb IIIC Db Ex eb mb IIC Gb
Shape of signaling unit head	Round
Cap/Operator or lens colour	Blue
Connections - terminals	Screw clamp terminals, 2 x 1.5 mm² with cable end EN/IEC 60947-1 Screw clamp terminals, 1 x 2.5 mm² without cable end EN/IEC 60947-1
Tightening torque	7.08…10.62 lbf.in (0.8…1.2 N.m) EN 60947-1
Signalling type	Steady
Light source	Integral LED
Light source colour	White

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Us] Rated Supply Voltage	24...254 V AC/DC
Service life	100000 h

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40…158 °F (-40…70 °C)
Ambient air temperature for operation	-4…167 °F (-20…75 °C)
Overvoltage category	I IEC 60536
IP degree of protection	IP65 IEC 60529
Standards	EN/IEC 60079-0:2009 EN/IEC 60079-7:2009 EN/IEC 60079-18:2009 EN/IEC 60079-31:2009 UL 60079-0 UL 60079-18 UL 60079-31 ANSI/ISA 12.12.01 CSA C22.2 No 213
Product Certifications	INERIS 04ATEX9003U

Ordering and shipping details

Category	22465 - PUSHBUTTONS, 22MM HAZ LOC
Discount Schedule	CS2
GTIN	3606489486105
Nbr. of units in pkg.	1
Package weight(Lbs)	3.07 oz (87 g)
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.72 in (6.9 cm)
Package 1 width	1.18 in (3 cm)
Package 1 Length	1.81 in (4.6 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Product data sheet XB4BVBM6GEX

Dimensions Drawings


Dimensions

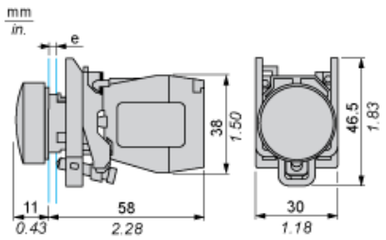

e : support thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals



(1) Diameter on finished panel or support
(2) 40 mm min. / 1.57 in. min.
(3) 30 mm min. / 1.18 in. min.
(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_{0}^{+0.4}$ / 0.88 in. $_{0}^{+0.016}$)