



1. Mechanical Dimensions:

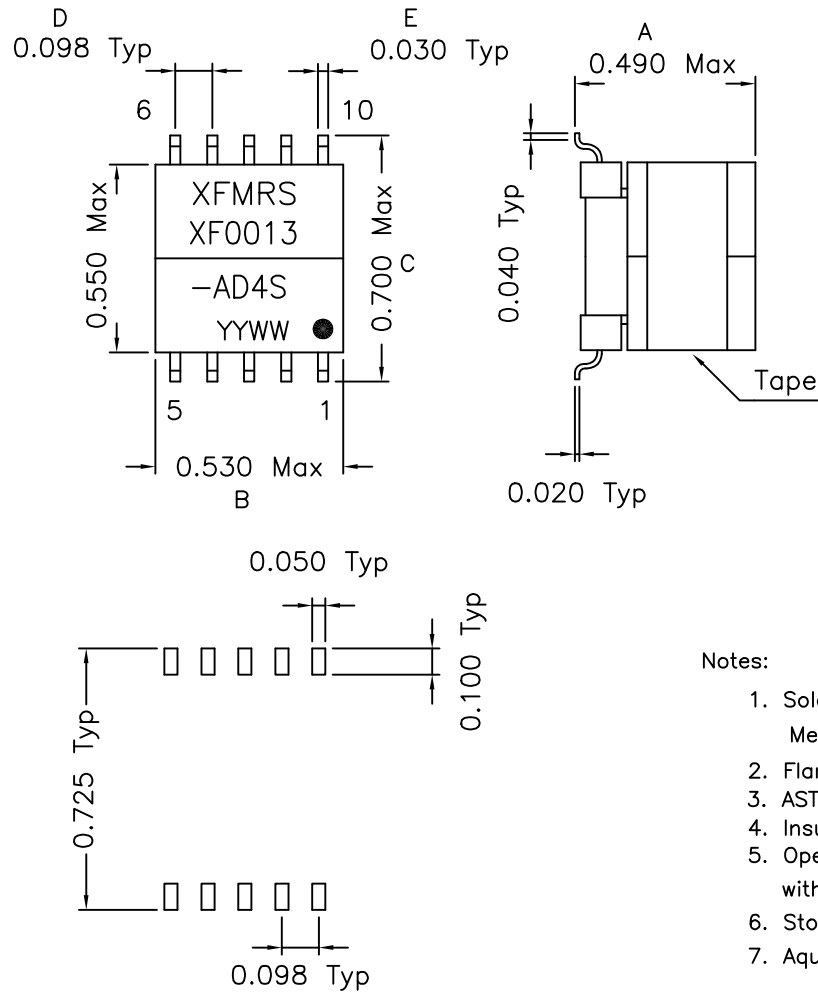

*No Varnish Required

2. Schematic:

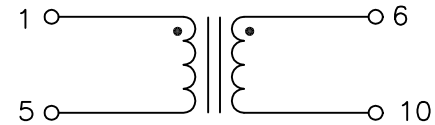

3. Electrical Specifications:

Turns Ratio: 1-5:6-10 1:1±1%

Isolation Voltage: 1500VAC

OCL: Pins 1-5 1.0mH±5% 50KHz 0.1V 0/120mAdc

DC Res.: 1-5 0.650 Ohms Max

6-10 0.650 Ohms Max

Resonant Frequency: 850KHz Min (Each Wdg)

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

XFMRS Inc		Title: ADSL Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0013-AD4S		REV. A	
	DWN.	廖玉坤	Mar-20-01	
	CHK.	李清儿	Mar-20-01	
	APP.	BW	Mar-20-01	

DOC. REV: A/3