

1. Mechanical Dimensions:

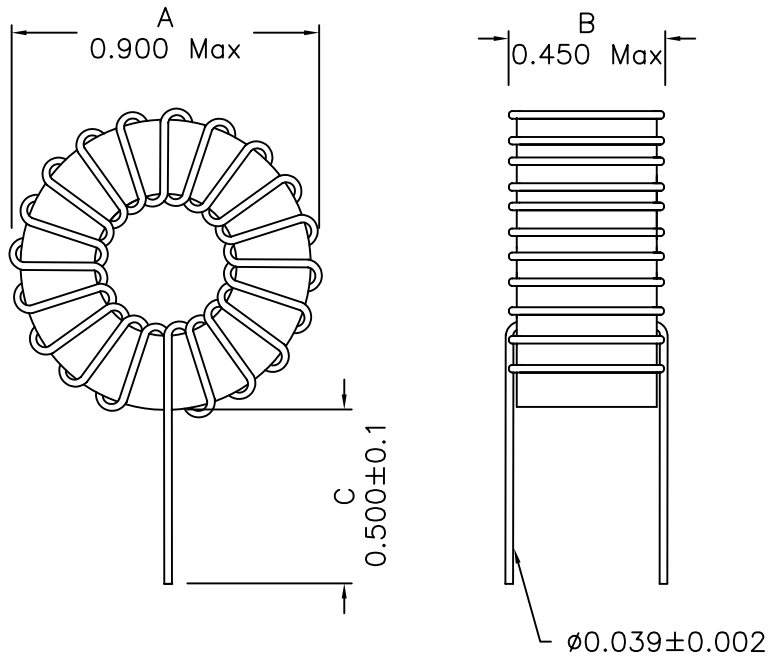

2. Schematic:



Micrometals T72-52 or equiv

3. Electrical Specifications: @25°C

OCL: 47uH+30%/-5% @10KHz 0.1V

OCL: 26uH Min @10KHz 0.1V, 4Adc

DC Resistance: 0.018 Ohms +10%/-25%

Etop: 54V-uSec @50KHz

Etop: 33V-uSec @100KHz

Q: 70 Min @10KHz 0.1V

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

DOC. REV: A/6

XFMRS Inc	Title: TOROIDAL INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0476-VO		REV. A
	DWN.	袁玉坤	Apr-01-04
	CHK.	李清儿	Apr-01-04
SHEET 1 OF 1	APP.	MS	Apr-01-04

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.