



1. Mechanical Dimensions:

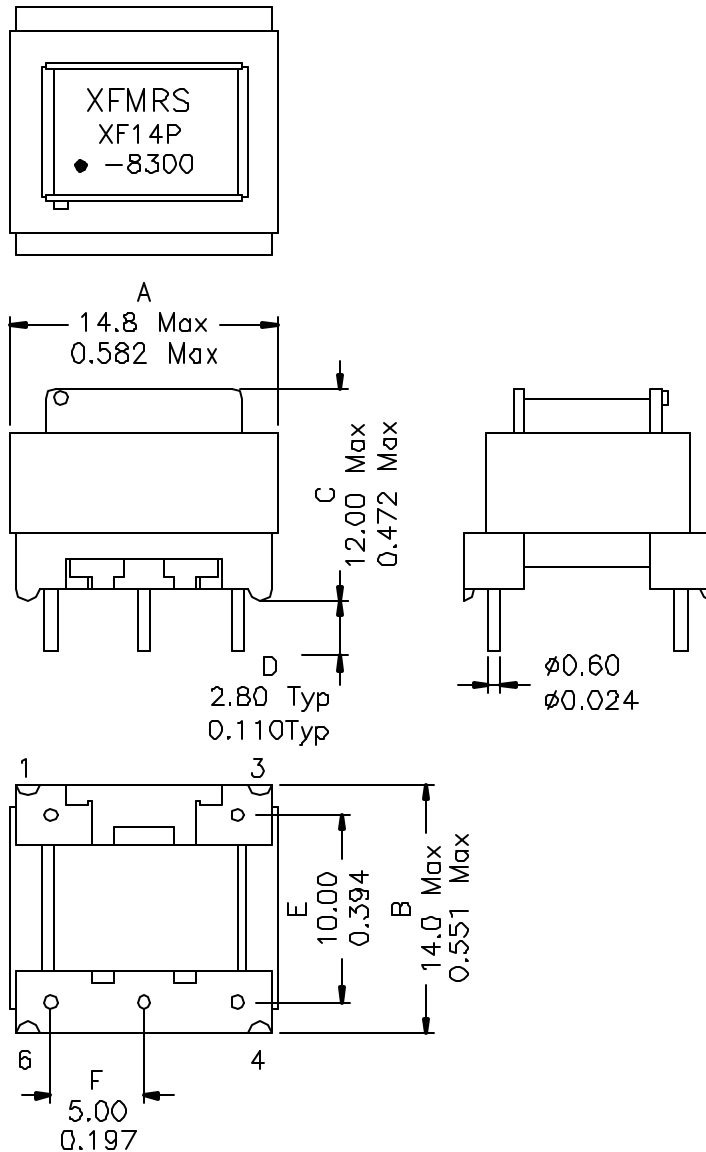

(BOTTOM VIEW)

2. Schematic:



3. Electrical Specifications:

TURN RATIO: 1:1 $\pm 2\%$ (PRI · SEC) @1KHz, 1.0V

IMPEDENCE: Designed to reflect 600 ohms on PRI with RL
324 Ohms

PRI. DCR: 135 $\pm 10\%$ Ohms @20°C

SEC. DCR: 143 $\pm 10\%$ Ohms @20°C

INSERTION LOSS: 3.0dB Typ @1KHz, 1.0V20°C

Longitudinal Balance: 60dB Min 200-1000Hz

Longitudinal Balance: 40dB Min 1KHz-4KHz

Total Harmonic Distortion: 82dB Typ 600 Hz, 10dBm

HIPOT: 1250Vac PRI to SEC

Note:

1. Solderability Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C, UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

XFMR5 Inc.		Title: MODEM TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.30 mm Dimensions in mm Inch	P/N: XF14P-8300		REV. A
	DWN.	廖玉坤	Jan-30-01
	CHK.	李清儿	Jan-30-01
Scale: 2.5:1 SHT 1 OF 1		APP.	BW Jan-30-01

DOC REV. A/1