

1. Mechanical Dimensions:

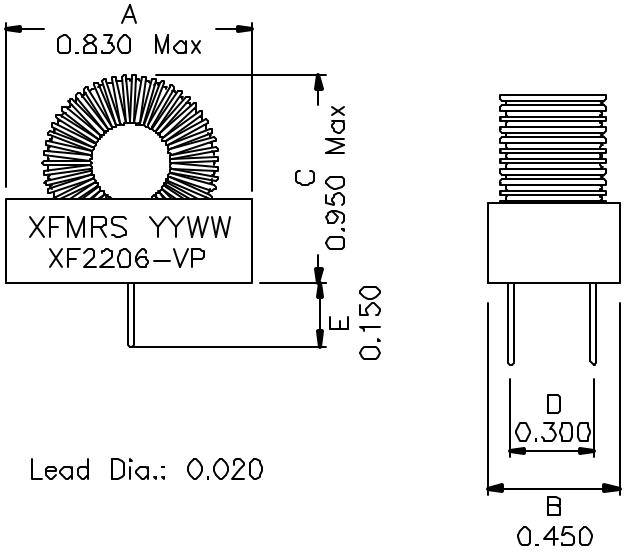

2. Schematic:



3. Electrical Specifications:

Inductance: 220uH±15% @10KHz, 100mV

DC Res.: 0.140 Ohms Max

Rated Current: 1.4 Adc Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability. UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

XFMRS Inc.	Title: VERTICAL INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF2206-VP		REV. A
	DWN.	廣玉坤	Sep-05-01
	CHK.	李清 IL	Sep-05-01
SHEET 1 OF 1	APP.	BW	Sep-05-01

DOC. REV. A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION