

Electrical Specifications: @25°C


[illegible]

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. UL Recognized Component: File Number E200238
5. Operating Temperature Range: All listed parameters are to be within tolerance from 0°C to +70°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

Oct-14-10


Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

Mechanical Dimensions:

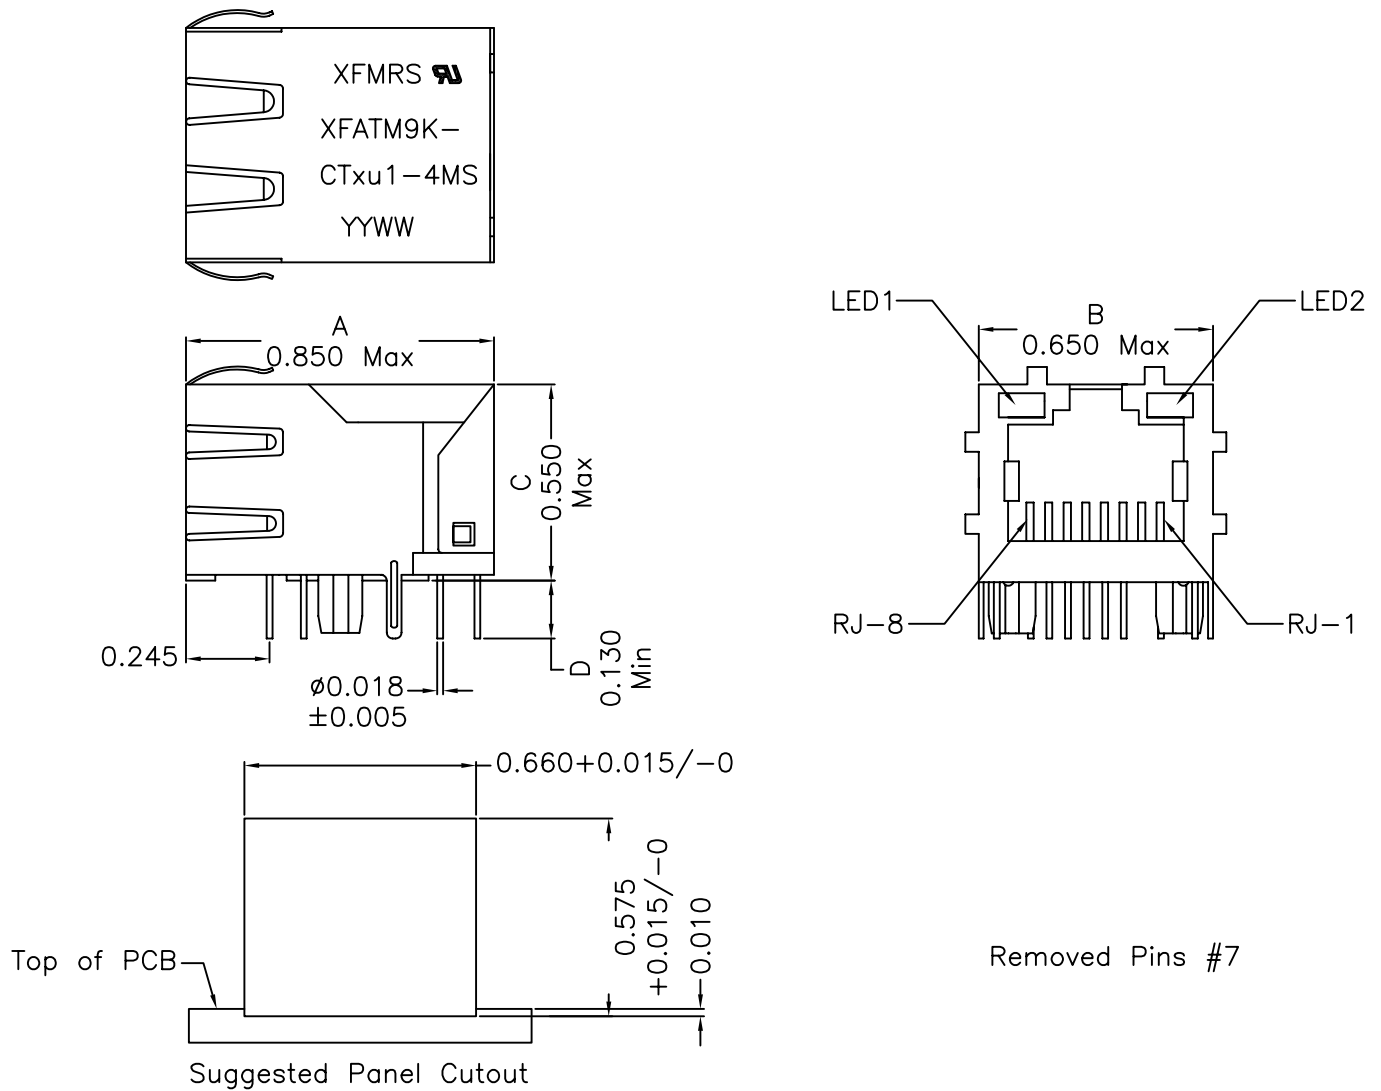

Removed Pins #7

Mounting Pattern:

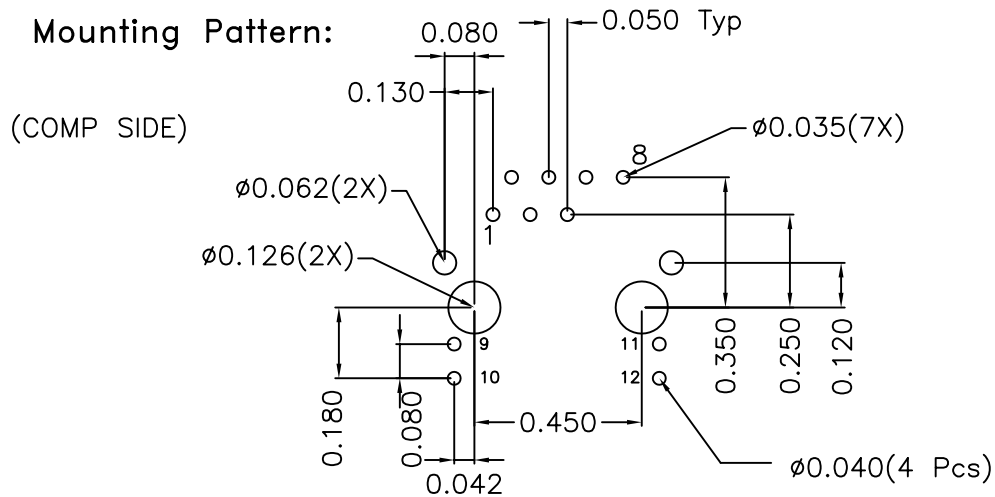

DOC REV: A/3

XFMR9 Inc.
www.XFMR9.com

Title:
0.85" Tab-UP Single port

UNLESS OTHERWISE SPECIFIED

P/N: XFMR9K-CTxu1-4MS

REV. A

TOLERANCES:
.xxx ± 0.010
Dimensions in Inch

DWN.	Mei Chen	Oct-14-10
CHK.	YK Liao	Oct-14-10

SHEET 2 OF 2

APP.	BW	Oct-14-10
------	----	-----------

PROPRIETARY:

Document is the property of XFMR9 Group & is not allowed to be duplicated without authorization.