



SPECIFICATION FOR APPROVAL

1 OF 2

XFMRS P/N : XFEB201209-601				Rev: A/12		
DIMENSION : (m/m)  				A	2.0±0.2	m/m
				B	1.2±0.2	m/m
				C	0.9±0.2	m/m
				D	0.5±0.3	m/m
				E		m/m
				F		m/m
				G		m/m
				H		m/m
				I		m/m
				J		m/m
				K		m/m
				L		m/m
				M		m/m
				N		m/m
				O		m/m
ELECTRICAL REQUIREMENTS				TEST INSTRUMENTS		
Z	600±25% ohm	TEST FREQ.	100	MHz	● HP 4338A MULTIMETER ○ HP 4195 NETWORKS/SPECTRUM ANALYZER ○ HP 42841 BIAS CURRENT SOURCE ○ HP 4285A PRECISION LCR METER ○ HP 4286A PRECISION LCR METER ● HP 4291A RF IMPEDANCE / MATERIAL ANALYZER ○ HP 6632A DC POWER SUPPLY	
Rdc	0.300 OHMS MAX	TEST FREQ.		MHz		
Idc	200mA MAX.	TEST FREQ.		MHz		
Notes: 1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability. 2. Flammability: UL94V-0 3. ASTM oxygen index: > 28% 4. Insulation System: Class F 155°C. UL file E151556 5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C 6. Storage Temperature Range: -55°C to +125°C 7. Aqueous wash compatible 8. SMD Lead Coplanarity: ±0.004"(0.102mm) 9. Moisture Sensitivity: Level 3 10. Electrical and mechanical specifications 100% tested 11. RoHS Compliant Component						
DRAWN BY :		CHECKED BY :		APPROVED BY :		
Mei Chen Apr-04-11		YK Liao Apr-04-11		BW Apr-04-11		
PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.						


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

2 OF 2

XFMRS P/N : XFEB201209-601

Rev: A/12

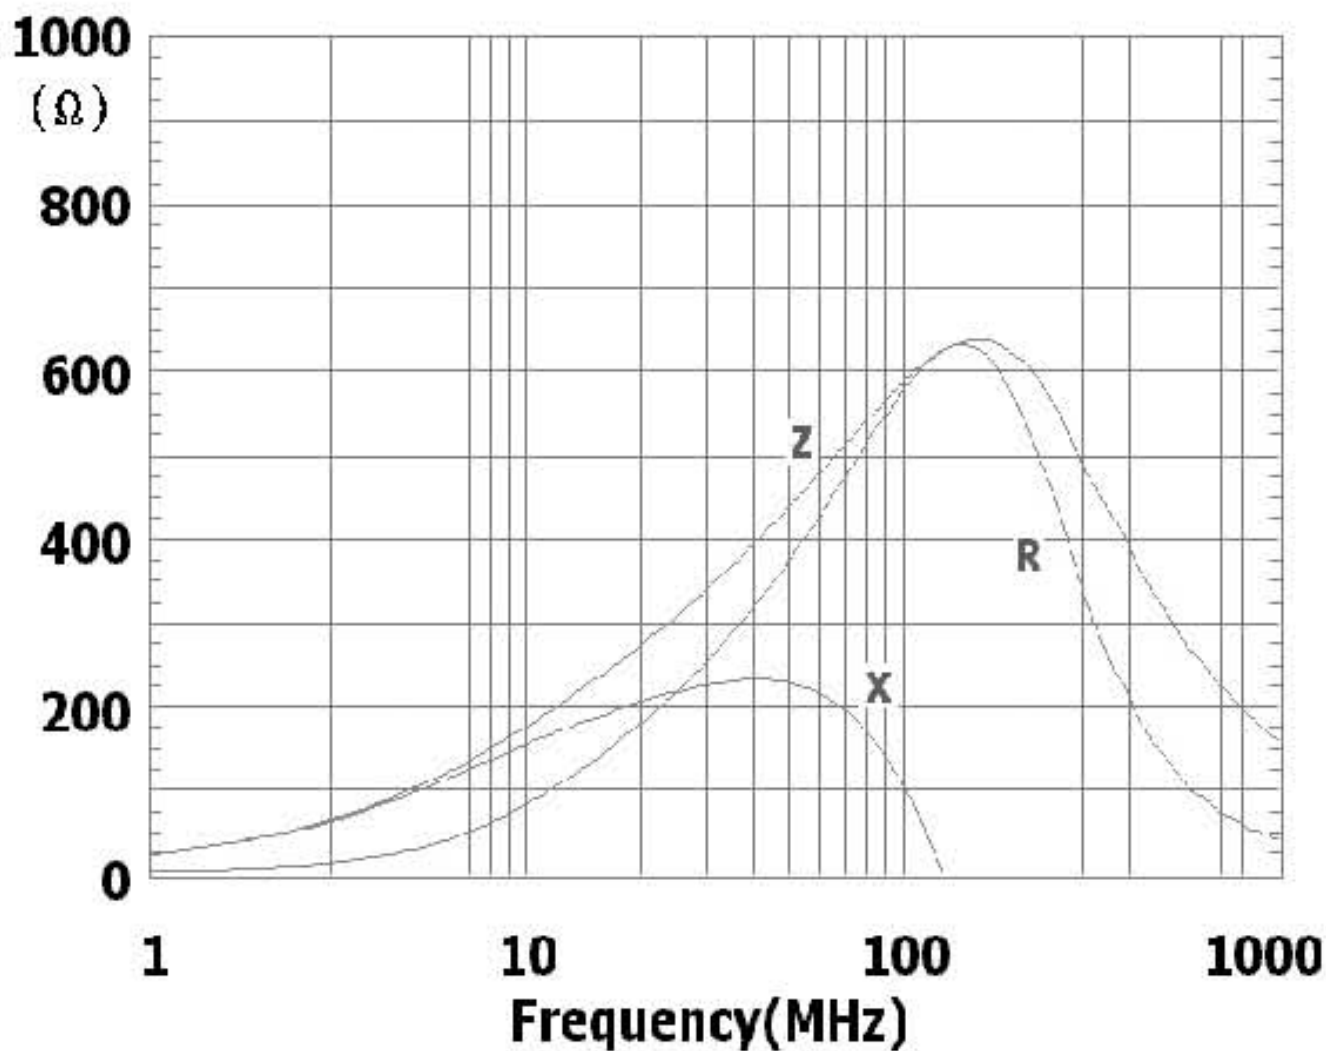

DRAWN BY :

Mei Chen

Apr-04-11

CHECKED BY :

YK Liao

Apr-04-11

APPROVED BY :

BW

Apr-04-11

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.