



SPECIFICATION FOR APPROVAL

Page 1 OF 2

XFMRS P/N : XFEB321611-102-1A				Rev: A/1		
DIMENSION : (m/m)  				A	3.2±0.2	m/m
				B	1.6±0.2	m/m
				C	1.1±0.2	m/m
				D	0.4~1.0	m/m
				E		m/m
				F		m/m
				G		m/m
				H		m/m
				I		m/m
				J		m/m
				K		m/m
				L		m/m
				M		m/m
				N		m/m
				O		m/m
ELECTRICAL REQUIREMENTS				TEST INSTRUMENTS		
Z	1000±25% Ohms	TEST FREQ.	100MHz 500mV	HP 34401A MULTIMETER HP 4195 NETWORKS/SPECTRUM ANALYZER HP 42841 BIAS CURRENT SOURCE HP 4285A LCR METER HP 4286A RF LCR METER HP 4291A RF IMPEDANCE / MATERIAL ANALYZER HP 4338A MILLION OHM METER HP 6632A DC POWER SUPPLY HP4284A PRECISION LCR METER		
Rdc	0.30 Ohms Max	TEST FREQ.	MHz			
Idc	1000mA MAX	TEST FREQ.	MHz			
Notes: 1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability. 2. Flammability: UL94V-0 3. ASTM oxygen index: > 28% 4. Insulation System: Class F 155°C. UL file E151556 5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C 6. Storage Temperature Range: -10°C to +40°C 7. Aqueous wash compatible 8. SMD Lead Coplanarity: ±0.004"(0.102mm) 9. Electrical and mechanical specifications 100% tested 10. RoHS Compliant Component						
DRAWN BY :		CHECKED BY :		APPROVED BY :		
Feng Nov-02-10		YK Liao Nov-02-10		BW Nov-02-10		


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

Page 2 OF 2

XFMRS P/N : XFEB321611-102-1A

Rev: A/1

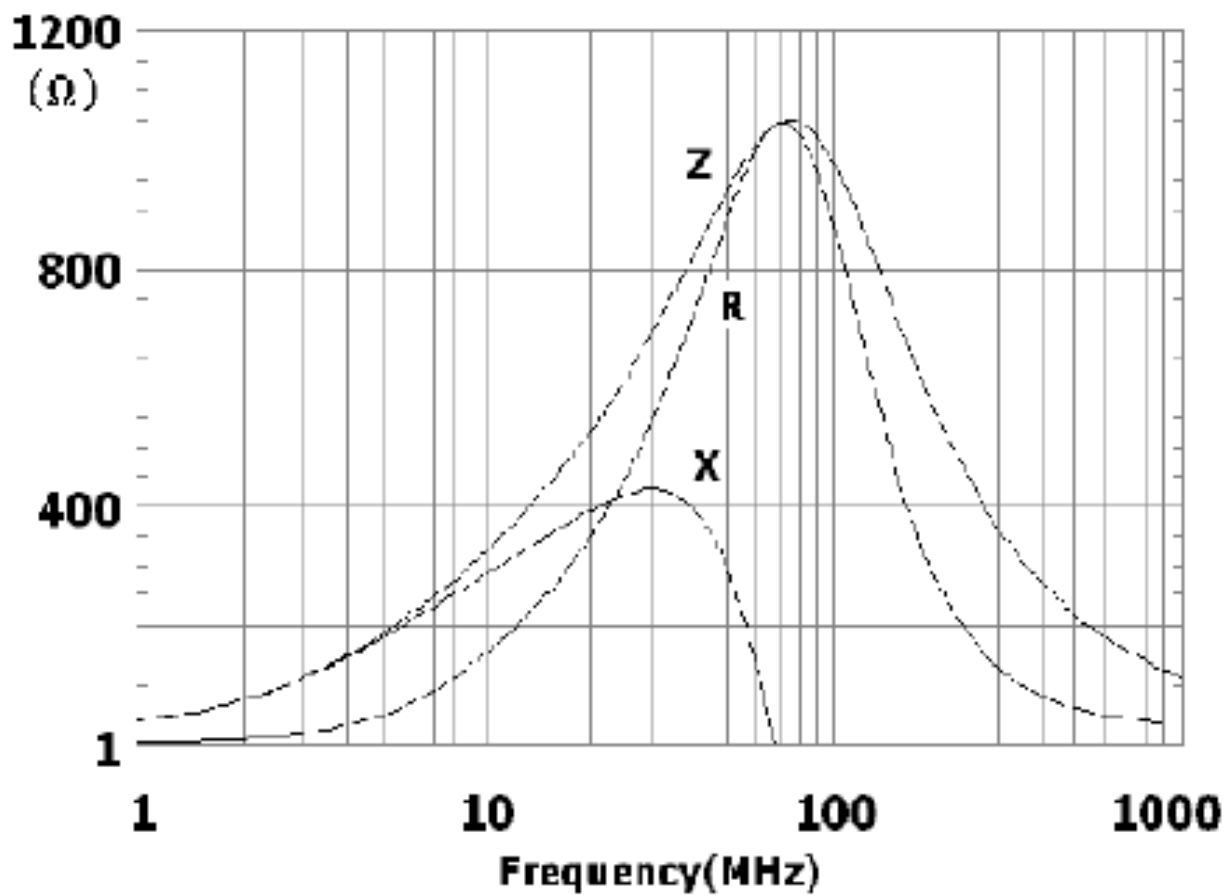

DRAWN BY :

Feng
Nov-02-10

CHECKED BY :

YK Liao
Nov-02-10

APPROVED BY :

BW
Nov-02-10