



1. Mechanical Dimensions:

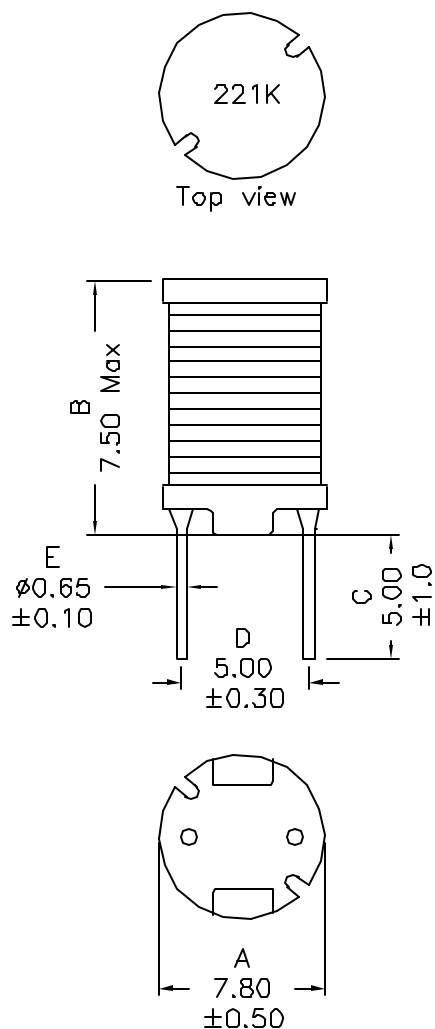

2. Schematic:



3. Electrical Specifications:

OCL: $220\mu\text{H} \pm 10\%$ @1.0KHz 0.3V

Rated I: 570mA_{dc}

DCR: 0.630 Ohms Max

Q: 10 Min @2.52MHz

Notes:

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.FMRS.com UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in MM SHEET 1 OF 1	Title: Radial Leaded Inductor		
	P/N: XFRCH875-221K		REV. A
	DWN.	Xiany	Mar-17-09
	CHK.	YK Liao	Mar-17-09
	APP.	Joe Huff	Mar-17-09