


## 1. Mechanical Dimensions:

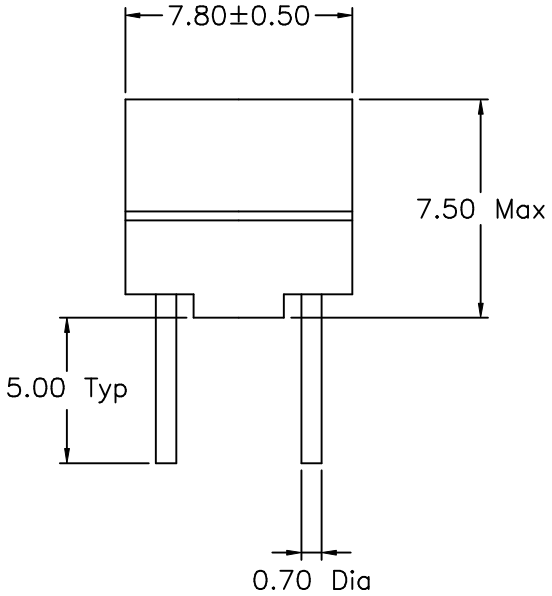


## 2. Schematic:



## 3. Electrical Specifications:

INDUCTANCE: 1mH ±20% @1KHz

IDC: 230mA Max

DC RESISTANCE: 2.72 Ohms Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -30°C to +100°C

Doc. Rev. A/1

| XFMRS Inc. | Title: Power Inductor | | |
|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM | P/N: XFRCR875D-102M | | REV. A |
| | DWN. | 廣玉坤 | Feb-15-01 |
| | CHK. | 李清 IL | Feb-15-01 |
| SHEET 1 OF 1 | APP. | Isaiah M | Feb-15-01 |

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION