

1. Mechanical Dimensions:

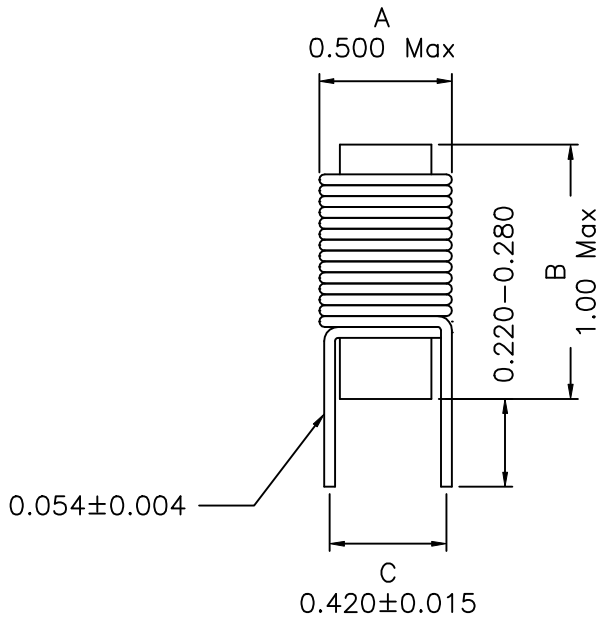

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 3.3uH ±15% @15.75KHz, 0.1V
DCR: 0.005 Ohms Max
ISAT: 10.0A
Irms: 10.0A
ΔT: 40°C rise typ. at Irms (85°C ambient)
Inductance drop =10% typ. at Isat.

Note:

1. Solderability: Leads shall meet MIL–STD–202, Method 208D for solderability.
2. Flammability: UL94V–0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from –40°C to +85°C

DOC. REV: A/1

XFMRS Inc	Title: POWER CHOKES		
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in INCH	P/N: XFRLVO–332		REV. A
	DWN.	龔玉坤	Oct–13–03
	CHK.	李清	Oct–13–03
SHEET 1 OF 1	APP.	BW	Oct–13–03

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION