

1. Mechanical Dimensions:

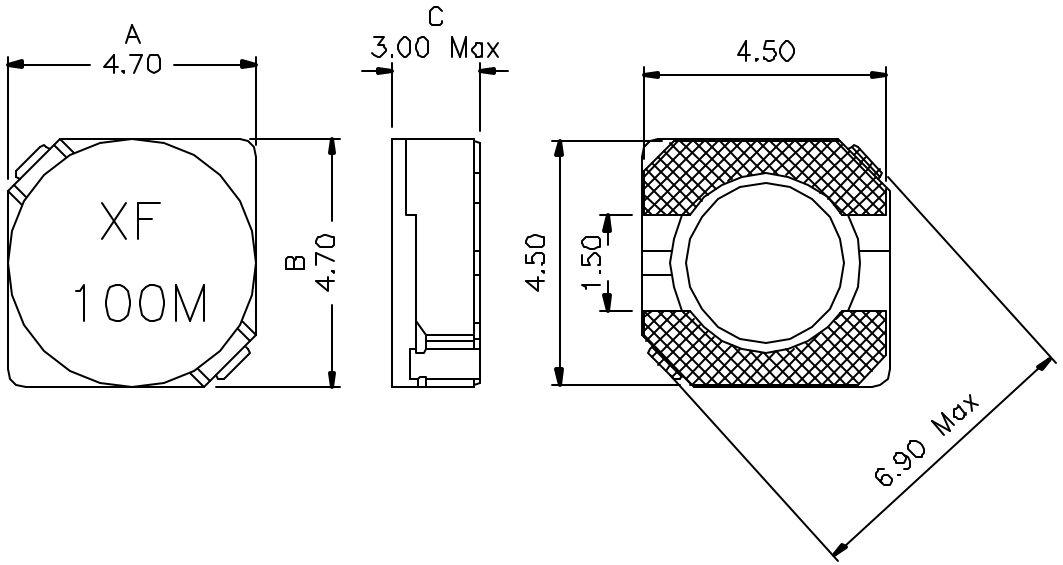

2. Schematic:



3. Electrical Specifications:

OCL: 10uH±20% @100KHz, 0.10V

DCR: 128.3 mOhms Max.

IDC: 1.0A Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

XFMRS Inc	Title: INDUCTORS		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFTPRH4D28-100M		REV. A
	DWN.	李小锋	Sep-18-01
	CHK.	莫玉坤	Sep-18-01
SHT 1 OF 1	APP.	BW	Sep-18-01

DOC. REV A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION