



1. Mechanical Dimensions:

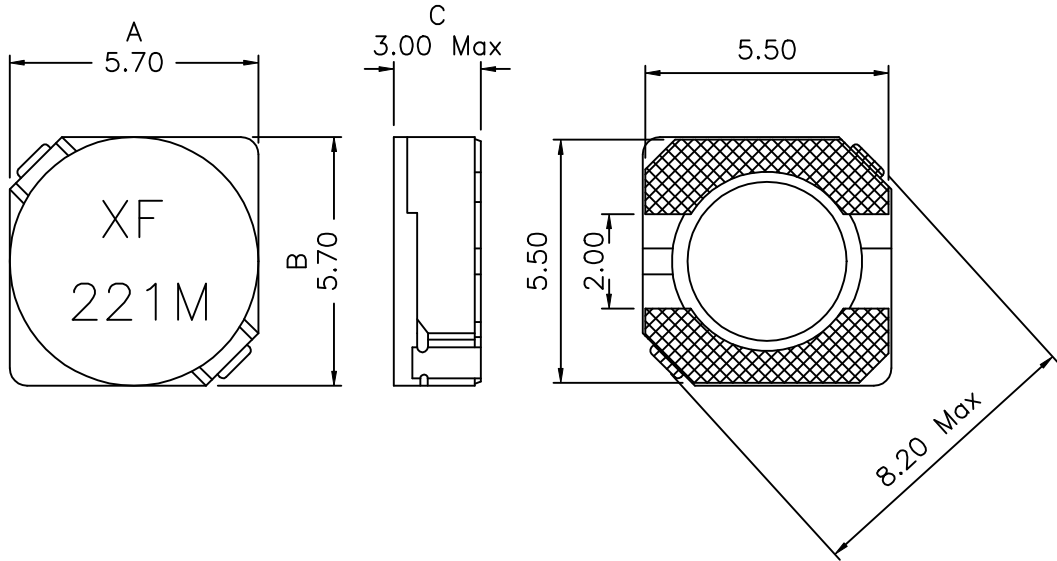

2. Schematic:



3. Electrical Specifications:

OCL: 220uH±20% @100KHz 0.25V
DCR: 0.680 Ohms Max
IDC: 0.250Adc

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

XFMRS Inc		Title: INDUCTORS		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XFTPRH5D28-221M		REV. A
		DWN.	李小锋	Jan-13-03
		CHK.	廖玉坤	Jan-13-03
SHT 1 OF 1		APP.	BW	Jan-13-03

DOC. REV: A/1