

VA-M Type

3.2 x 2.5 mm SMD CMOS Output Voltage Controlled Crystal Oscillator


FEATURE

- Low power supply voltage: 3.3, 2.5 supply options
- Singled-end output : CMOS
- Frequency support from 10MHz to 250MHz
- Low phase jitter typical: 0.8 ps RMS from 12kHz to 20MHz
- Wide frequency control range - Tri-state enable/disable function
- Temperature range: -40 to 85 °C operation
- Pb-free/RoHS compliant


TYPICAL APPLICATION

- High-Speed Gigabite Ethernet, Fiber Channel, Storages Area Network, SONET
- Enterprise Server, SAS/SATA - Microprocessors/DSP/FPGA
- Broadband Access - Smart Grid


DIMENSION (mm)

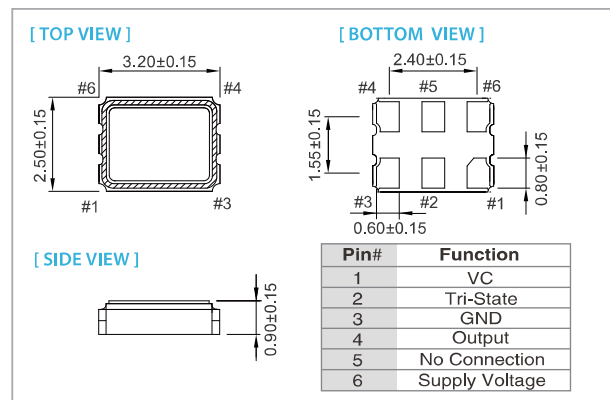

SOLDER PAD LAYOUT (mm)

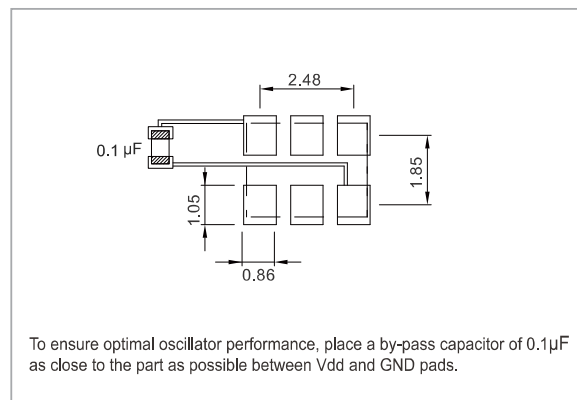

Actual Size 



RoHS Compliant

ELECTRICAL SPECIFICATION

Parameter			CMOS				unit
			3.3 V		2.5 V		
			Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)			VDD-10%	VDD+10%	VDD-5%	VDD+5%	V
Frequency Range			10	250	10	250	MHz
Supply Current			—	50	—	45	mA
Output Level	Output High		2.97	—	2.25	—	V
	Output Low		—	0.33	—	0.25	V
Transition Time (10%-90%)		Rise Time / Fall Time	—	1.0	—	1.0	nSec
Duty Cycle			45	55	45	55	%
Startup Time			—	10	—	10	mSec
Tri-State mode (Input to Pin 2)		Enable	0.7 x VDD	—	0.7 x VDD	—	V
		Disable	—	0.3 x VDD	—	0.3 x VDD	
Stand by Current			—	18	—	18	mA
Output Loading (10MHz to 200MHz)			—	15	—	15	pf
Output Loading (200MHz to 250MHz)			—	5	—	5	pf
Phase Noise			Typ.	Max.	Typ.	Max.	
At VDD=3.3V, f _{out} =250MHz	1kHz offset		-107	—	-107	—	dBc/Hz
	10kHz offset		-111	—	-111	—	dBc/Hz
	100kHz offset		-114	—	-114	—	dBc/Hz
	1MHz offset		-125	—	-125	—	dBc/Hz
	20MHz offset		-147	—	-147	—	dBc/Hz
RMS Phase Jitter (12kHz to 20MHz)			0.8	1.5	0.8	1.5	pSec
Parameter			Control Voltage Function on Pin 1				unit
			3.3 V		2.5 V		
			Min.	Max.	Min.	Max.	
Control Voltage Center			1.65		1.25		V
Control Voltage Range			0.3	3	0.25	2.25	
Frequency Pulling Range			±50	±150	±50	±150	ppm
Linearity			5	10	5	10	%
Modulation Bandwidth			10	—	10	—	kHz
VC Input Impedance			1	—	1	—	MΩ

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±25	±50
-10 ~ +60	○	○	○
-20 ~ +70	○	○	○
-40 ~ +85	△	○	○

* ○ : Available △ : Conditional X : Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Rev(1)06/2018

www.taitien.com

sales@taitien.com.tw