


SHEET OF

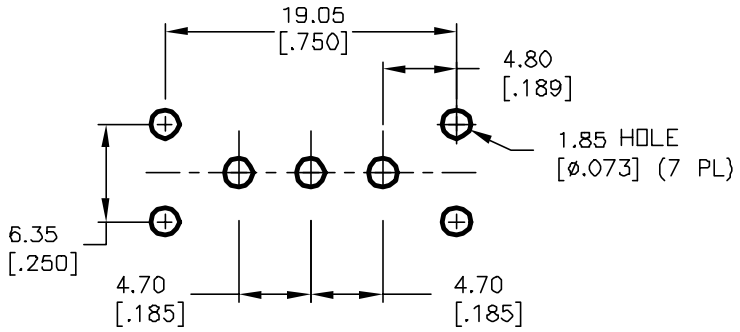

RECOMMENDED PCB LAYOUT

SCALE 2X







CIRCUIT: SPDT

SWITCH FUNCTION	
ON	(ON)
1-3	1-2

( ) =MOMENTARY

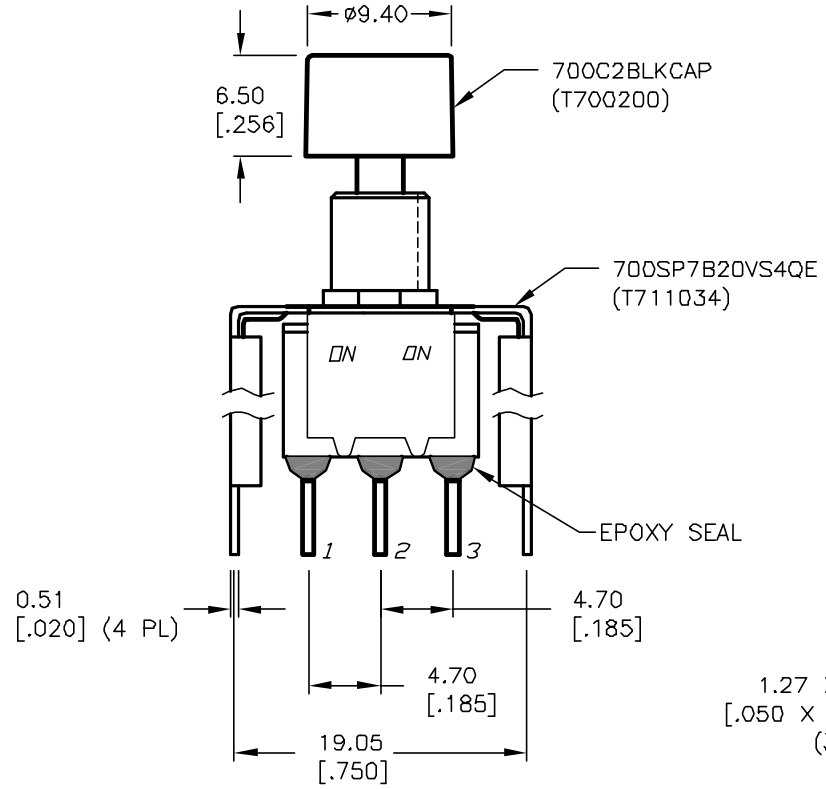

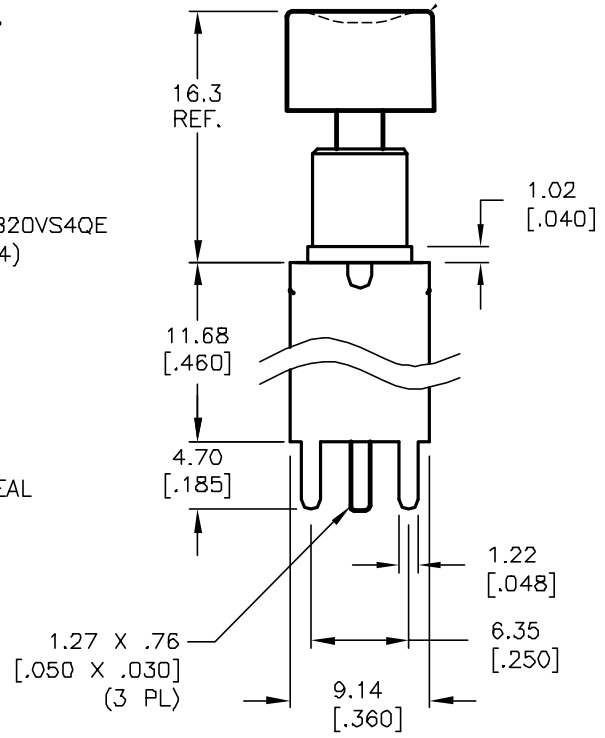

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 1A @120VAC or 28VDC
5. FIXED TERM. & MOVING CONTACT:
   Copper Alloy w/Silver plate
6. CONTACT RESISTANCE: 10mILLI-ohms initial
   @2-4VDC
7. ELECTRICAL LIFE: 50,000 make-and-break
   cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12335	RELEASED FOR PRODUCTION	8/01/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 700 SP-7 B20 VS4 QE

SCALE	DATE	DR	DWG	REV
2:1	8/01/02	CJB	XT0101P	A