




- **Surface Mount Seam-Weld Package**
- **Good Frequency Stability over Temperature**
- **Excellent Reliability**
- **Complies with Directive 2002/95/EC (RoHS)** 

The XTL1009 is a surface mount 5.0 x 3.2 mm crystal unit for use in wireless telecommunications devices, especially where an ultra-miniature package is needed for mobility.

XTL1009

**8.00000 MHz
Crystal Unit**




SM5032-4 Case

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Nominal Frequency				8.00000		MHz
Mode of Oscillation			Fundamental			
Storage Temperature Range			-40		+85	°C
Operating Temperature Range			-10		+60	°C
Frequency Stability over Operating Temperature Range			±30 ppm (referred to the value at 25°C)			
Frequency Make Tolerance	F_L		±30 ppm @ 25°C ±3°C			
Equivalent Series Resistance	ESR				200	Ω
Nominal Drive Level				20		μ W
Shunt Capacitance	C_O				3.0	pF
Load Capacitance	C_L			12		pF
Standard Shipping Quantity on 330 mm (13") Reel				3000		units
Lid Symbolization (in addition to Lot and/or Date Codes)	1009 YWWS					

Crystal Equivalent Circuit

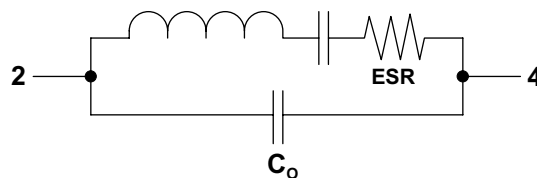

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


Notes:

1. The design, manufacturing process, and specifications of this device are subject to change without notice.

SM5032-4 Case


4-Terminal Surface-Mount Seam Weld Case

5.0 x 3.2 mm Nominal Footprint





Electrical Connections


Pin	Connection
1	GND
2	IN/OUT
3	GND
4	IN/OUT

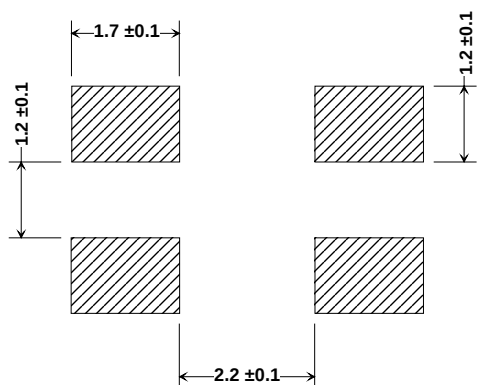

Footprint (mm)

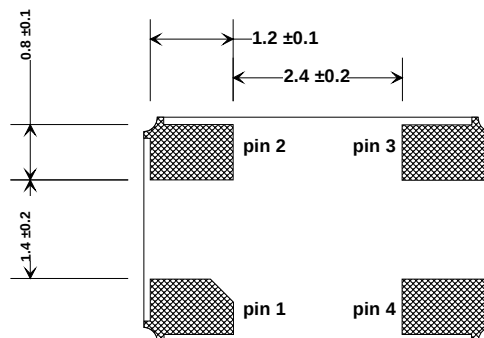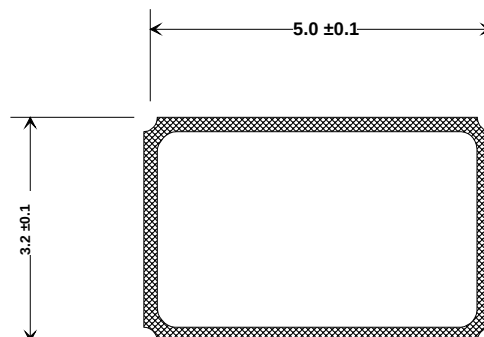


Package Dimensions (mm)

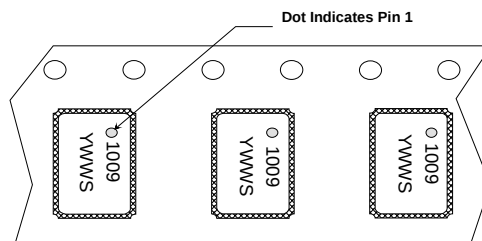


Package Orientation in Carrier Tape

Reel Dimensions

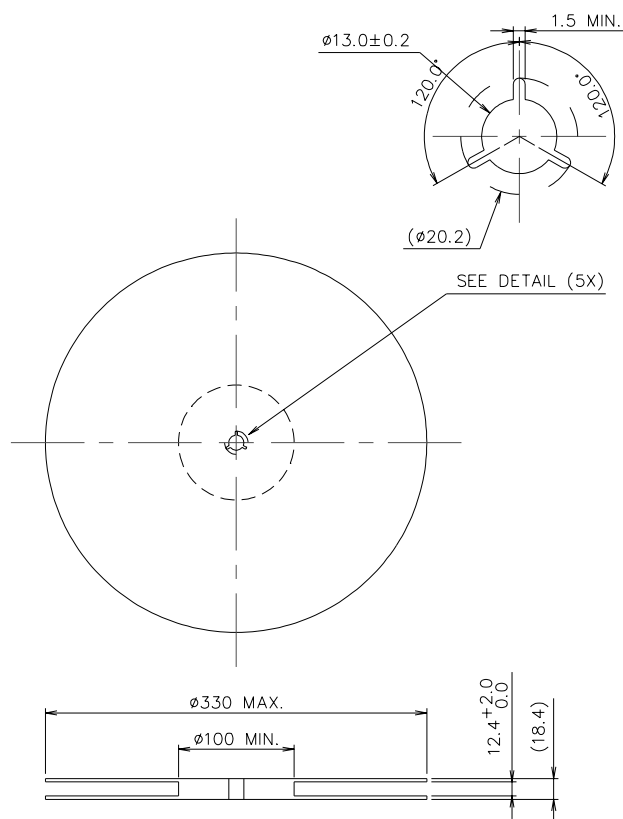

Tape Dimensions

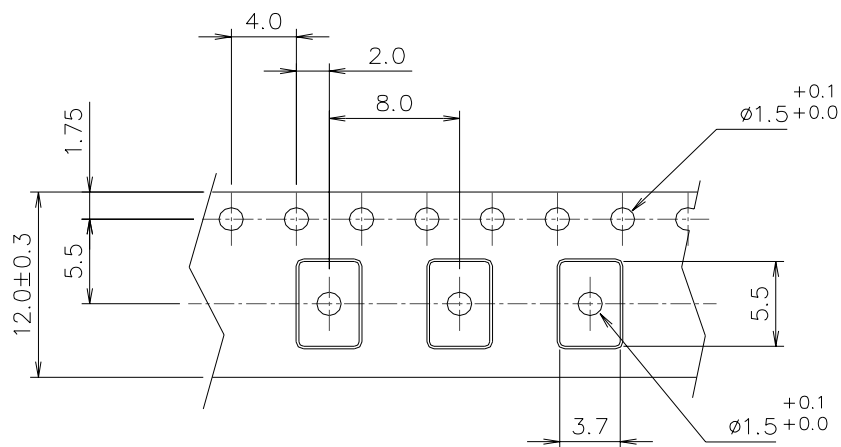

Notes:

1. Unless otherwise specified, tolerance on dimensions is ± 0.1 mm
2. Material is black conductive polystyrene
3. 10 pitch cumulative tolerance is ± 0.2 mm