


Y33xx Model 9X14 mm SMD, 3.3V, HCMOS

Lead Free
RoHS
Compliant

Clock Oscillator






Frequency Range:	1.544MHz to 66.667MHz
Frequency Stability:	±25ppm, ±50ppm, ±100ppm
Temperature Range:	
Operating:	0°C to 70°C
(Option M)	-20°C to 70°C
(Option E)	-40°C to 85°C
Storage:	-55°C to 120°C
Input Voltage:	3.3V ± 0.3V
Input Current:	20mA Max @ 66MHz
Output:	HCMOS
Symmetry:	45/55% Max @ 50% Vdd
Rise/Fall Time:	8ns Max @ 20% to 80% Vdd
Logic:	"0" = 10% Vdd Max "1" = 90% Vdd Min
Load:	30pF Max
Jitter RMS: 12KHz~20MHz	0.5ps Typ, 1ps Max
Aging:	<3ppm 1st/yr, 1ppm every year thereafter


Designed to meet today's requirements for low jitter 3.3V applications. The Y33xx Series is a Non-PLL based oscillator design for excellent jitter performance. Available on tape and reel in quantities of 1K.

Dimensions inches (mm)

All dimensions are Max unless otherwise specified.

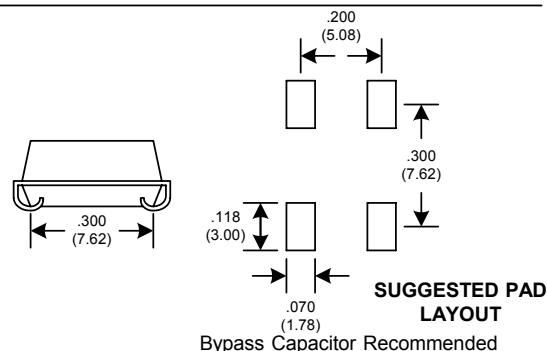

RECOMMENDED REFLOW SOLDERING PROFILE

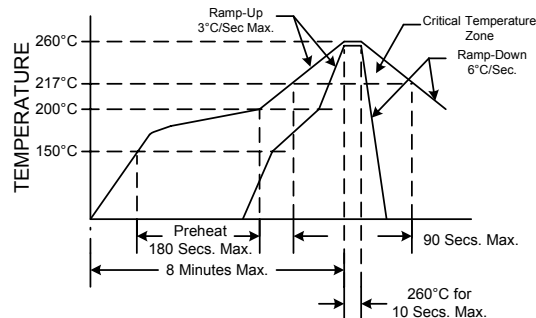

NOTE: Reflow Profile with 240°C peak also acceptable.


Tri-State Function	
Function pin 1	Output pin
Open	Active
"1" level 2.4V Min	Active
"0" level 0.4V Max	High Z

Crystek Part Number Guide

Example: Y3392-44.736MHZ
Intermediate Temp: YM3392-44.736MHZ
Extended Temp: YE3392-44.736MHZ
Y= 0°C to 70°C
*YM= -20°C to 70°C, *YE= -40°C to 85°C

Symmetry 40/60%

Part Number	Freq. Stability
Y*3390	+/- 100ppm
Y*3392	+/- 50ppm
Y*3391	+/- 25ppm (+/- 100ppm only) -40°C to 85°C

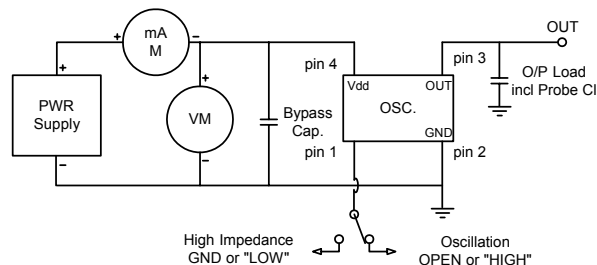

Specifications subject to change without notice.

TD-050301 Rev.C

Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com

