


ZA-TM

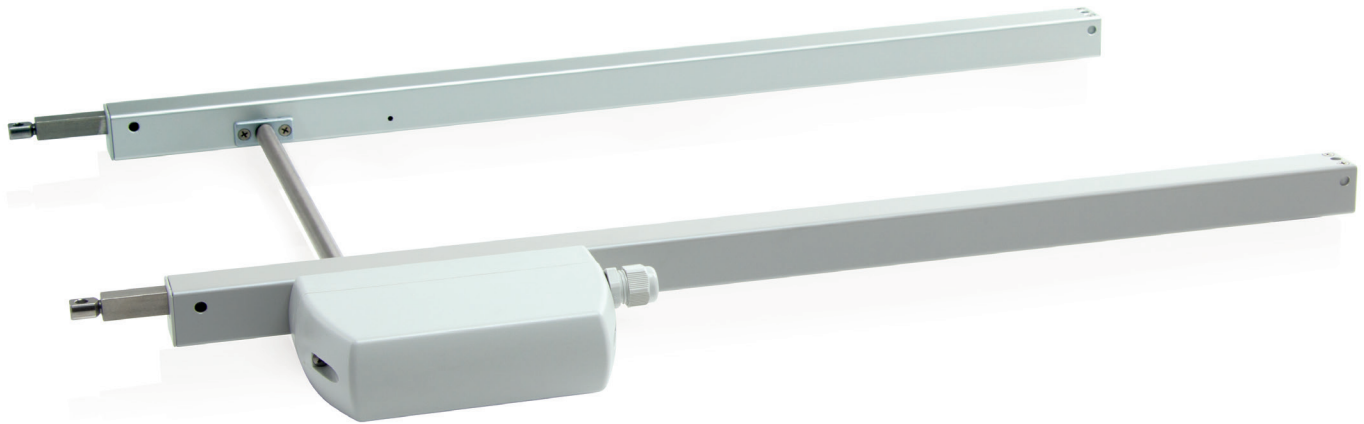

Performance features



- » Can be used for openings for smoke exhaust; D+H Euro SHEV in accordance with EN 12101-2; and for daily ventilation
- » For mechanically connecting to tandem drives using a VA connecting shaft
- » Tandem version for heavy loads, can be combined with: ZA drive (ZA-TM), ZA slave unit (ZM) and connecting shaft (VW)
- » High-speed function (HS) for especially fast opening windows in case of fire (SHEV)
- » Uniform load distribution on window sashes
- » Drive unit can be changed from left to right

Potential drive options



You can find the explanations for the icons on the last page

Example of application

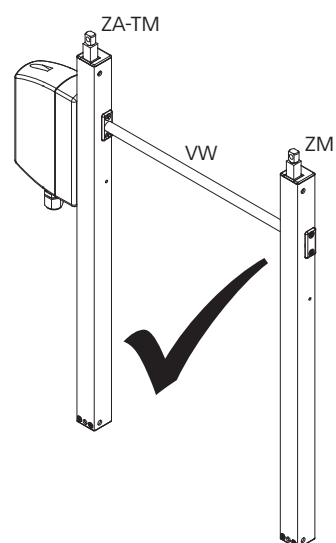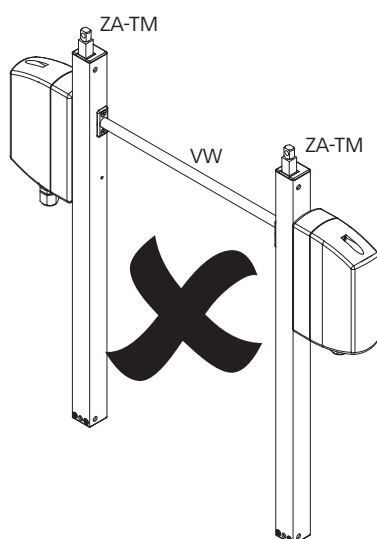

Usable drives

Type	Art. No.
ZA-1-PLP	27.005.00
ZA-K	27.007.02

Order drive with "Option TM"

Design

Type	Art. No.	Stroke	Length	Diameter	Weight	Remark
ZM 500	20.005.00	500 mm			1.10 kg	
ZM 800	20.005.10	800 mm			1.60 kg	Only for topside mounting
ZM 1000	20.005.20	1000 mm			1.90 kg	Only for topside mounting
ZM	20.009.10					Variable equipment possible
VW 1018	20.030.00		1018 mm	12 mm	0.48 kg	
VW 1518	20.030.10		1518 mm	12 mm	0.71 kg	
VW 2000	20.030.20		2000 mm	12 mm	0.95 kg	
VW	20.030.21					Variable equipment possible