


ISSUE	AMENDMENT	DATE
1	CHANGE DESIGN	04.02.23
2	ADD DIMENSION	04.02.25
3	UPDATE DIMENSION AND ADD PIN ASSIGNMENT	04.03.03

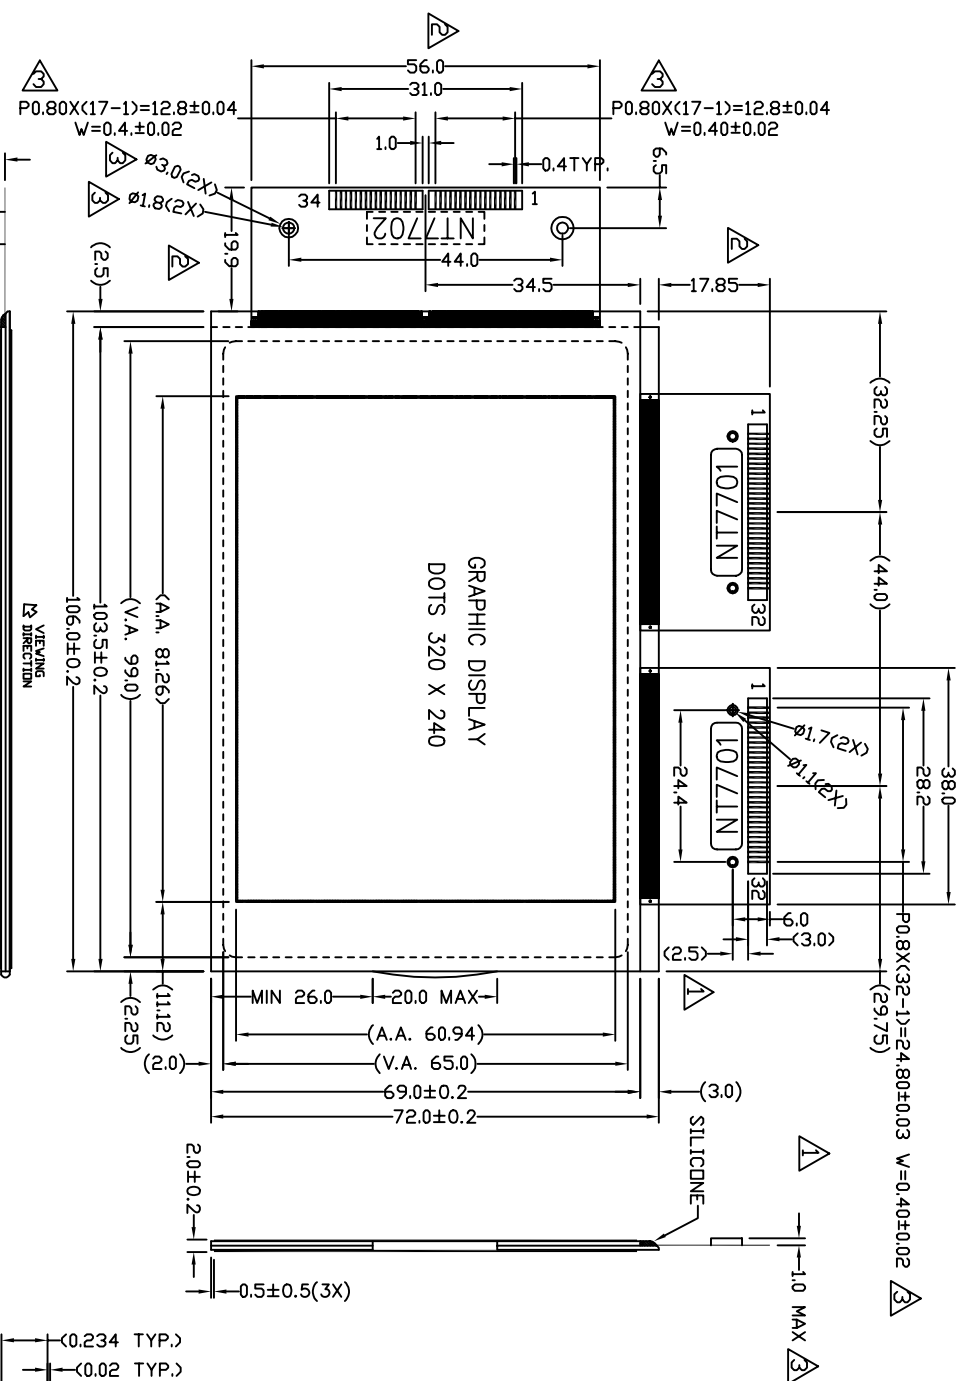

Display Type	Reflective, B&W, ZBD
Display Resolution	320x240
Viewing Angle	3 O'CLOCK
Max ratio and bias level	TBD
LCD Controller/Driver	NT7701E3 TAB x 2, NT7702N TAB
Logic Voltage (V)	3.3V~5V
LCD Driving Voltage	15 ~ 20V
Operation Temperature	+10°C to +40°C
Storage Temperature	-20°C to +70°C

TITLE: PRELIMINARY SPECIFICATION OF MODULE

PROJECT NO: ZBD320240B-01

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X.X ±0.3
X.XX ±0.1

DIMENSIONS IN MM

MATERIAL: FINISH:

SCALE: DO NOT ON SCALE THICKNESS:

THIRD ANGLE PROJECTION

NAME	SIGN	DATE
DRAWN	CHAN KAM FAI	04.03.03
CHECKED	DANIEL POON	
APPROVED	K.P. HO	

ITEM NO.

DESCRIPTION:

FILE NO:MODULE ZBD320240B-01 REV 3

NT7701E3 TAB Pin assignment															
Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Name	Dummy	VOL	V12L	V43L	V5L	L/R	VPD	S/C	EIO2	D0	D1	D2	D3	D4	D5
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
D6	D7	XCK	DISPOFF	LP	EIO1	FR	MD	TEST1	TEST2	VSS	V5R	V43R	V12R	VOR	Dummy
NT7702N TAB Pin Assignment															
Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Name	Dummy	VOL	V12L	V43L	V5L	VSS	VPD	S/C	EIO2	D0	D1	D2	D3	D4	D5
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
D6	D7	XCK	DISPOFF	LP	EIO1	FR	MD	TEST1	TEST2	VSS	V5R	V43R	V12R	VOR	Dummy

