ZP8 Series

180° Active Eject Pin Header

Specifications

Voltage Rating:	150V AC
Current Rating:	1.0A
Operating Temperature Range:	–40°C to +105°C
Withstanding Voltage:	500V for 1 minute
Soldering Temp.:	260°C / 3 sec.


Materials and Finish

Housing:	UL 94V-0 listed
Terminals:	Brass
Contact Plating:	Selective Gold over Nickel

Features

RoHS

- Pin count from 10 to 68



Part Number (Details)


ZP8 - ** - G2T

Series No.


No. of Contact Pins


Plating:
G2T = Selective Gold

Outline Connector Dimensions

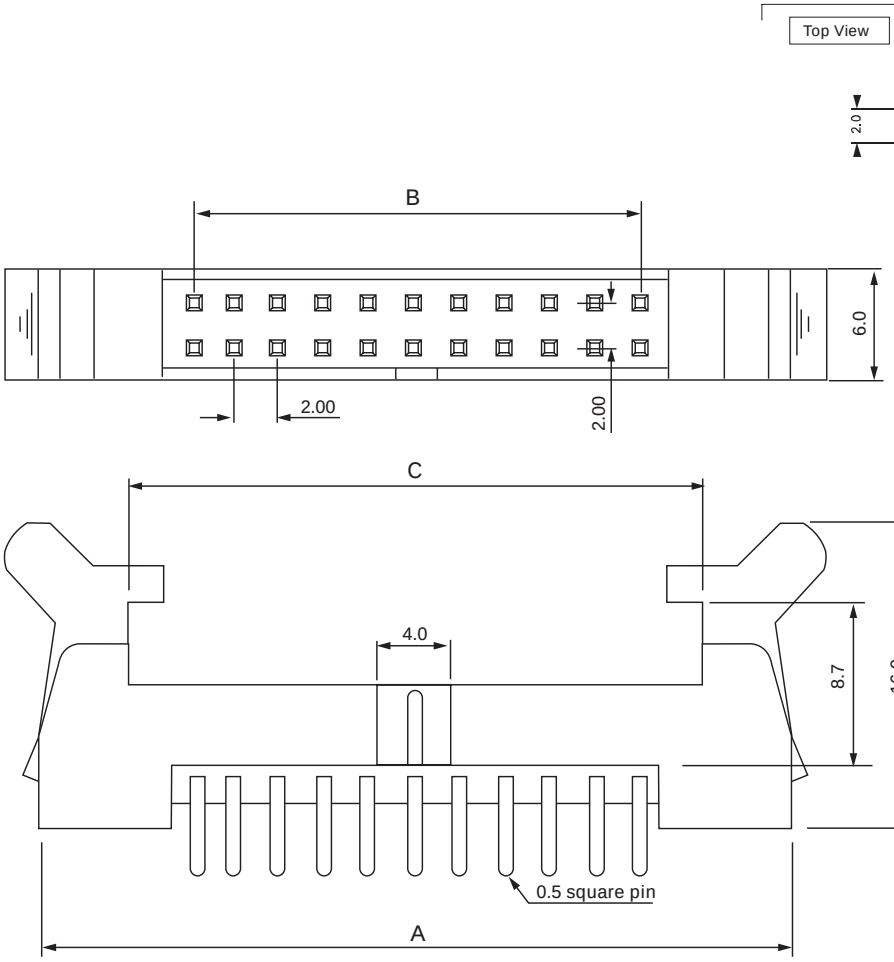

Recommended PCB Layouts

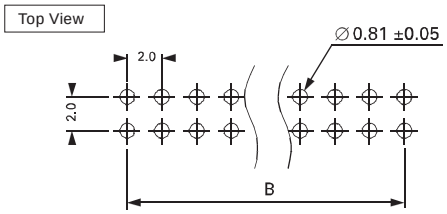

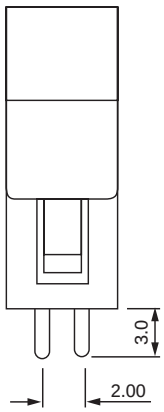

Dimensional Information

Part Number	Dim. A	Dim. B	Dim. C	Part Number	Dim. A	Dim. B	Dim. C
ZP8-10-G2T	25.7	8.0	15.8	ZP8-26-G2T	41.7	24.0	31.8
ZP8-12-G2T	27.7	10.0	17.8	ZP8-30-G2T	45.7	28.0	35.8
ZP8-14-G2T	29.7	12.0	19.8	ZP8-34-G2T	49.7	32.0	39.8
ZP8-16-G2T	31.7	14.0	21.8	ZP8-40-G2T	55.7	38.0	45.8
ZP8-20-G2T	35.7	18.0	25.8	ZP8-44-G2T	59.7	42.0	49.8
ZP8-22-G2T	37.7	20.0	27.8	ZP8-50-G2T	65.7	48.0	55.8
ZP8-24-G2T	39.7	22.0	29.8	ZP8-68-G2T	83.7	66.0	73.8