

SMD CERAMIC RESONATORS

FEATURES

RoHS-2 2011/65/EU
compliant

- ☐ High reliability for low cost
- ☐ Small dimensions and low profile
- ☐ Wide frequency range
- ☐ Excellent clock signal generator


GENERAL DATA

Part Number	Bild-in Capacitor	Frequency Range	Frequency Accuracy	Stability over Temperature	Operating Temperature	Aging For 10 Years
ZTACC-MG	no	2.00 - 8.00 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCC-MG	yes					
ZTACR-MG	no	4.00 - 8.00 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCR-MG	yes					
ZTACE-MG	no	8.00 - 12.00 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCE-MG	yes					
ZTACS-MT	no	6.00 - 13.00 MHz	±0.5% at 25°C	±0.4% over -25/+85°C	-25/+85°C	±0.3%
ZTTCS-MT	yes					
ZTACV-MT	no	8.00 - 13.0 MHz	±0.5% at 25°C	±0.4% over -25/+85°C	-25/+85°C	±0.3%
ZTTCV-MT	yes					
ZTACS-MX	no	13.01 - 60.0 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCS-MX	yes					
ZTACV-MX	no	16.00 - 60.0 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCV-MX	yes					
ZTACW-MX	no	20.00 - 60.0 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCW-MX	yes					
ZTACZ-MX	no	24.00 - 60.0 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTT CZ-MX	yes					
ZTACP-MG	no	2.00 - 12.0 MHz	±0.5% at 25°C	±0.3% over -25/+85°C	-25/+85°C	±0.3%
ZTTCP-MG	yes					


OTHER PARAMETERS ARE AVAILABLE ON REQUEST / CREATE HERE YOUR SPECIFICATION

TEST CIRCUIT FOR MOS IC

ZTACC/CR/CS/CV/CW/CZ/CP/CE - MG/MT/MX

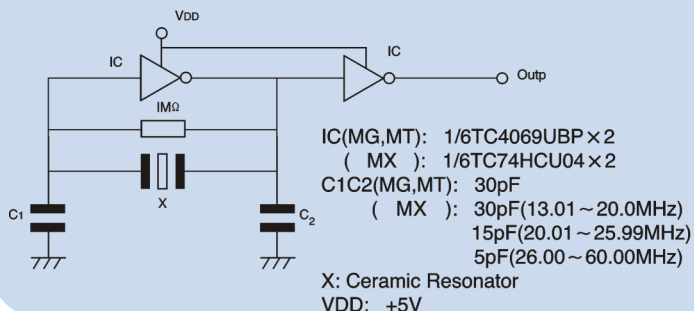

ZTTCC/CR/CE/CS/CV/CW/CZ/CP - MG/MT/MX

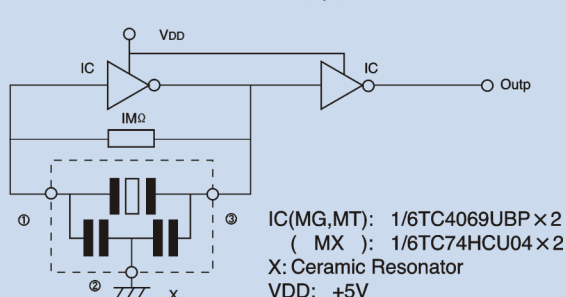

CRYSTALS

OSCILLATORS

CERAMIC RESONATORS




Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS

SAW COMPONENTS

Spec.01 • REV.00 • August 2013

DIMENSIONS

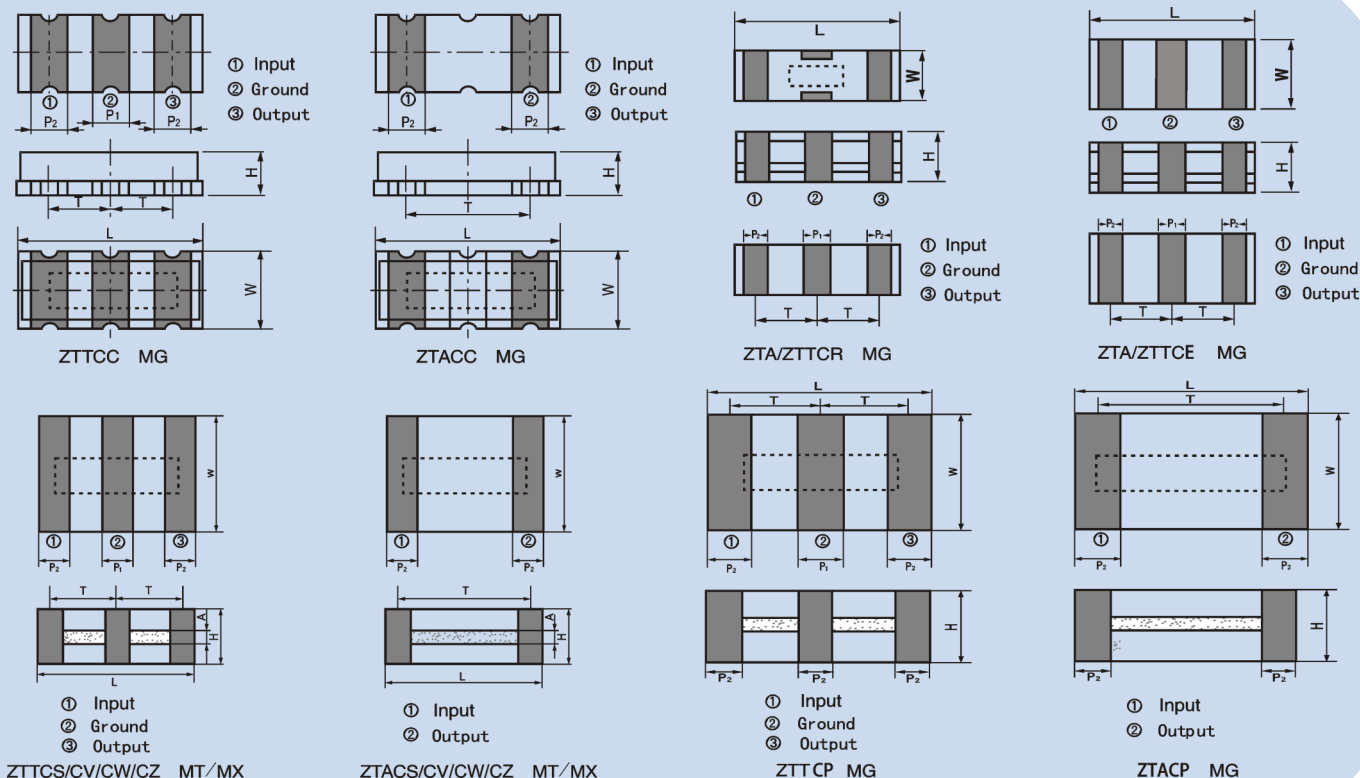

Part Number	L	W	H	P1	P2	T
ZTACC-MG	7.4±0.2	3.4±0.2	1.8±0.2	1.2±0.2	1.2±0.2	5.0±0.2
ZTCC-MG						2.5±0.2
ZTACR-MG	4.5±0.2	2.0±0.2	1.2max	0.8±0.2	0.8±0.2	1.5±0.2
ZTTCR-MG						
ZTACE-MG	3.2±0.2	1.3±0.2	1.0max	0.4±0.2	0.4±0.2	1.2±0.2
ZTTCE-MG						
ZTACS-MT/MX	4.7±0.2	4.1±0.2	(1.2+A)±0.2	1.0±0.2	0.8±0.2	3.9±0.2
ZTTCS-MT/MX						1.95±0.2
ZTACV-MT/MX	3.7±0.2	3.1±0.2	(1.0+A)±0.2	0.9±0.2	0.7±0.2	3.0±0.2
ZTTCV-MT/MX						1.5±0.2
ZTACW-MX	2.5±0.2	2.0±0.2	1.2max	0.5±0.2	0.4±0.2	2.0±0.2
ZTTCW-MX						1.0±0.2
ZTACZ-MX	2.2±0.2	1.8±0.2	1.2max	0.4±0.2	0.5±0.2	1.7±0.2
ZTTTCZ-MX						0.85±0.2
ZTACP-MG	6.0±0.2	3.0±0.2	1.8±0.2 1.5±0.2 1.7±0.2	1.2±0.2	1.2±0.2	5.0±0.2
ZTTCP-MG						2.5±0.2

Note: A stands for thickness of the ceramic element, which varies with the frequency. The range of the thickness difference is 0.1 to 0.7 mm.
No middle terminal for ZTA series.

CRYSTALS
OSCILLATORS
CERAMIC RESONATORS




Premium Quality by
PETERMANN-TECHNIK


CERAMIC FILTERS
SAW COMPONENTS

Spec.01 • REV.00 • August 2013

PACKING APPROACH

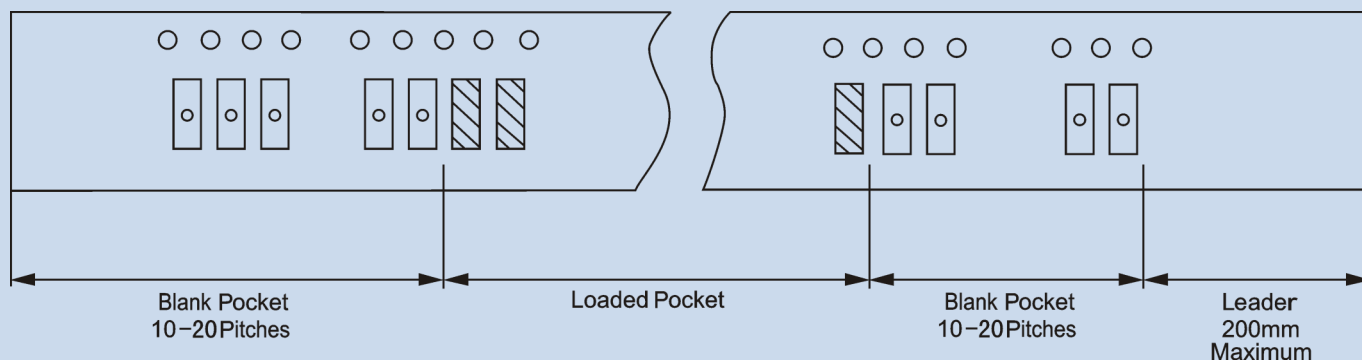


TAPE SIZE

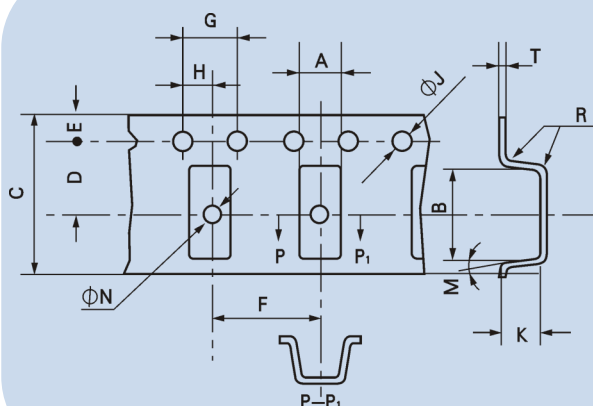

Size Code Tolerance	A	B	C	D	E	F	G	H	ØJ	ØN	M	R	K	T
Part Number	±0.2	±0.2	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	max	max	±0.2	±0.1
ZTACC MG	3.8	7.8	16.0	7.5	1.75	8.0	4.0	2.0	1.5	1.6	10°	0.3	2.1	0.3
ZTCCR MG	2.2	4.7	12.0	5.5	1.75	4.0	4.0	2.0	1.6	1.6	3°	0.3	1.3	0.3
ZTACE MG	1.5	3.4	8.0	3.5	1.75	4.0	4.0	2.0	1.6	1.1	3°	0.3	1.3	0.25
ZTACS MT/MX	5.0	4.4	12.0	5.5	1.75	8.0	4.0	2.0	1.5	1.6	10°	0.3	1.8	0.3
ZTACV MT/MX	3.4	4.0	12.0	5.5	1.75	8.0	4.0	2.0	1.5	1.6	10°	0.3	1.3	0.3
ZTACW MX	2.3	2.8	8.0	3.5	1.75	4.0	4.0	2.0	1.6	1.1	3°	0.3	1.3	0.25
ZTACZ MX	2.1	2.5	8.0	3.5	1.75	4.0	4.0	2.0	1.6	1.1	3°	0.3	1.3	0.25
ZTACP MG	3.4	6.4	16.0	7.5	1.75	8.0	4.0	2.0	1.5	1.6	10°	0.3	1.8	0.3

REEL SPECIFICATION

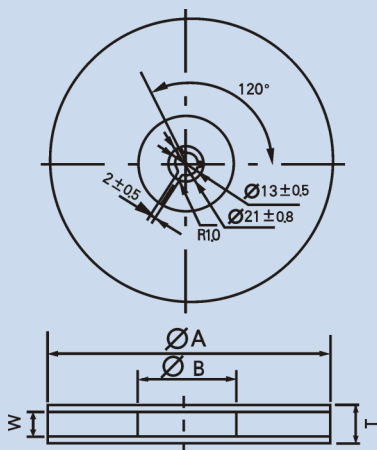

ØA	ØB	W	T	Pieces per reel	Carrier tape size
179 ± 2	60 typ	8.4min	14.0max	3000 typ	8
179 ± 2	60 typ	12.4min	19.4max	3000 typ	12
179 ± 2	60 typ	12.4min	19.4max	1000 typ	12
179 ± 2	60 typ	16.4min	22.4max	1000 typ	16
330 ± 3	80 min	12.4min	19.4max	4000 typ	12
330 ± 3	80 min	16.4min	22.4max	4000 typ	16

typ -- (Typical Value)


CRYSTALS
OSCILLATORS
CERAMIC RESONATORS

PT
 Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS
SAW COMPONENTS


Spec.01 • REV.00 • August 2013

RECOMMENDED REFLOW SOLDERING CONDITIONS


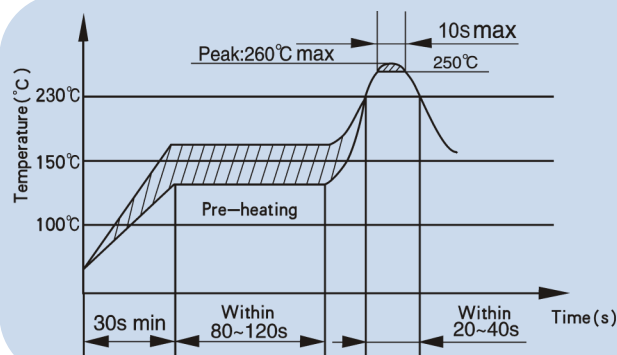


TEST CONDITIONS OF PEELING STRENGTH

0.196 ~ 0.686N
 Peeling Strength

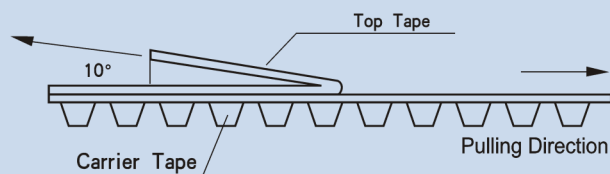

RECOMMENDED LAND PATTERN



Part Number	Size Code	Size (mm)			
		T ₁	T ₂	T ₃	W ₁
ZTACC/CP MG	MG	1.5±0.3	1.7±0.3	5.0±0.3	4.0±0.3
ZTTCC/CP MG	MG	0.8±0.2	0.8±0.2	2.5±0.3	2.6±0.2
ZTACR MG	MG	0.8±0.2	0.8±0.2	3.0±0.2	2.6±0.2
ZTTCR MG	MG	0.8±0.2	0.8±0.2	1.5±0.2	2.6±0.2
ZTACE MG	MG	0.4±0.2	0.4±0.2	1.2±0.2	2.0±0.2
ZTTCE MG	MG	0.4±0.2	0.4±0.2	1.2±0.2	2.0±0.2
ZTACS MT/MX	MT/MX	0.8±0.2	1.3±0.2	3.9±0.2	5.1±0.2
ZTTCS MT/MX	MT/MX	0.8±0.2	1.3±0.2	1.95±0.2	5.1±0.2
ZTACV MT/MX	MT/MX	0.7±0.2	1.0±0.2	3.0±0.2	4.1±0.2
ZTTCV MT/MX	MT/MX	0.7±0.2	1.0±0.2	1.5±0.2	4.1±0.2
ZTACW MX	MX	0.5±0.2	0.5±0.2	2.0±0.2	2.6±0.2
ZTTCW MX	MX	0.5±0.2	0.5±0.2	1.0±0.2	2.6±0.2
ZTACZ MX	MX	0.5±0.2	0.5±0.2	1.7±0.2	2.4±0.2
ZTT CZ	MX	0.5±0.2	0.5±0.2	0.85±0.2	2.4±0.2

CRYSTALS
OSCILLATORS
CERAMIC RESONATORS



Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS
SAW COMPONENTS

Spec.01 • REV.00 • August 2013

ORDERING INFORMATION

Series

ZTACC

Frequency

8.000

Model Code

MG

Delivery Form

4

Example: ZTACC-8.000MG 4
PLEASE INDICATE YOUR REQUIRED SERIES

DELIVERY FORM

OPTIONS:

ZTA/ZTTCC	=4.000 pcs per reel
ZTA/ZTTCR	=3.000 pcs per reel
ZTA/ZTTCE	=3.000 pcs per reel
ZTA/ZTTCS	=1.000 pcs per reel
ZTA/ZTTCV	=1.000 pcs per reel
ZTA/ZTTCW	=3.000 pcs per reel
ZTA/ZTTCP	=4.000 pcs per reel
ZTA/ZTTCZ	=3.000 pcs per reel

CRYSTALS

OSCILLATORS

CERAMIC RESONATORS



Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS

SAW COMPONENTS

Spec.01 • REV.00 • August 2013