

Frequency Mixer WIDE BAND

Level 7 (LO Power +7 dBm) 3700 to 10000 MHz

ZX05-14+




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

Coaxial Connections

LO	2
RF	3
IF	1

Outline Drawing

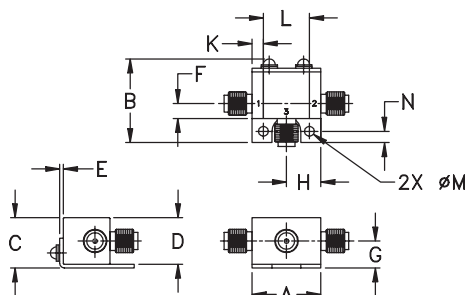

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Features

- wide bandwidth, 3700 to 10000 MHz
- low conversion loss, 6.7 dB typ.
- high L-R isolation, 38 dB typ.
- excellent IF BW, DC to 4000 MHz
- rugged construction
- small size
- useable as up and down converter
- protected by US patents 6,790,049; 7,027,795

Applications

- satellite up and down converters
- defense radar and communications
- line of sight links
- federal fixed service
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
		Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	
3700-10000 3700-6200 6200-10000	LO/RF $f_c - f_u$								
	IF								
	DC-4000								
		6.7	0.3	8.0	40	33	16	10	14
		6.7	0.3	10	35	25	17	9	11


1 dB COMPR.: +1 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
3700.10	3730.10	6.58	51.26	20.04	2.93	7.34
4100.10	4130.10	6.38	40.67	18.99	2.87	4.92
4500.10	4530.10	6.22	40.61	15.96	2.46	3.13
4900.10	4930.10	6.05	38.79	14.00	2.37	2.09
5300.10	5330.10	6.46	40.71	12.81	3.15	1.49
5700.10	5730.10	6.57	37.62	13.21	3.25	1.89
6100.10	6130.10	6.30	40.74	14.07	2.93	2.61
6200.10	6230.10	6.35	39.60	14.24	2.84	2.82
6600.10	6630.10	6.30	38.69	14.80	2.67	3.44
7000.10	7030.10	6.34	37.07	15.30	2.28	3.48
7400.10	7430.10	6.22	39.52	14.92	2.07	3.29
7800.10	7830.10	6.02	36.84	13.50	2.06	2.66
8200.10	8230.10	6.29	31.74	11.66	2.17	1.74
8600.10	8630.10	6.54	38.46	14.46	2.47	1.46
9000.10	9030.10	7.07	37.71	20.29	3.00	1.81
9400.10	9430.10	7.75	30.76	22.38	3.66	2.18
9700.10	9730.10	7.85	28.88	19.34	4.14	2.36
9800.10	9830.10	8.00	28.40	18.54	4.22	2.35
9900.10	9930.10	8.09	28.25	18.00	4.38	2.32
10000.10	10030.10	8.15	28.31	17.54	4.43	2.26

Electrical Schematic

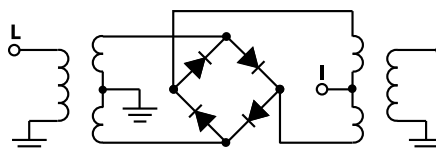

Mini-Circuits®
ISO 9001 ISO 14001 AS9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M111660
ZX05-14+
ED-12902/1
DJ/TD/QL
081021
Page 1 of 2

