

Coaxial

# Voltage Controlled Oscillator

ZX95-1015+

Linear Tuning 750 to 1010 MHz

## Features

- low phase noise
- low pushing
- low pulling
- protected by US patent 6,790,049

## Applications

- r & d
- lab
- instrumentation
- wireless communications
- mobile TV



CASE STYLE: GB956

| Connectors | Model        |
|------------|--------------|
| SMA        | ZX95-1015-S+ |

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications

| MODEL NO.  | FREQ. (MHz) |      | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies,kHz |      |      |      | TUNING            |                       |               |                                 |      | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) |      | PULLING pk-pk @12 dBr (MHz) | PUSHING (MHz/V) | DC OPERATING POWER |              |
|------------|-------------|------|--------------------|--------------------------------------------------|------|------|------|-------------------|-----------------------|---------------|---------------------------------|------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|--------------|
|            |             |      |                    | Typ.                                             |      |      |      | VOLTAGE RANGE (V) | SENSI- TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) |      |                             |                 |      |                             |                 | Vcc (volts)        | Current (mA) |
|            | Min.        | Max. |                    | Typ.                                             | 1    | 10   | 100  | 1000              | Min.                  | Max.          | Typ.                            | Typ. | Typ.                        | Typ.            | Max. | Typ.                        | Typ.            |                    |              |
| ZX95-1015+ | 750         | 1010 | +6                 | -85                                              | -113 | -134 | -154 | 0.5               | 28                    | 7-15          | 70                              | 35   | -90                         | -20             | -10  | 1                           | 1.5             | 5                  | 35           |

## Maximum Ratings


|                                      |                |
|--------------------------------------|----------------|
| Operating Temperature                | -55°C to 85°C  |
| Storage Temperature                  | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc)   | 6V             |
| Absolute Max. Tuning Voltage (Vtune) | 30V            |
| All specifications                   | 50 ohm system  |

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note [AN-40-10](#).

## Outline Drawing

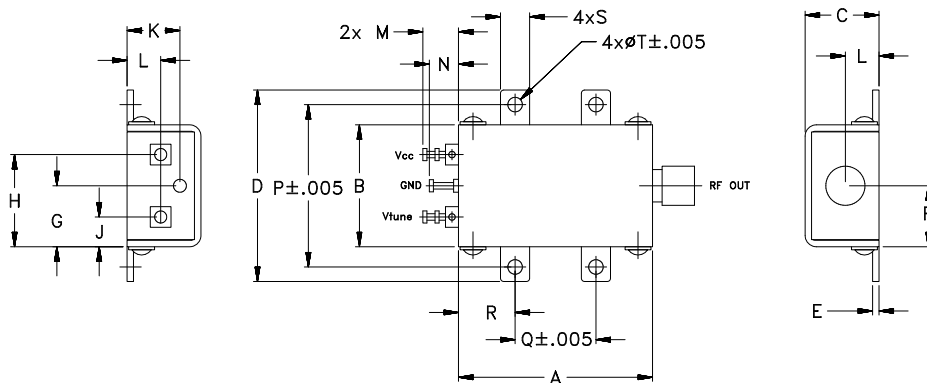

## Outline Dimensions (inch/mm)

| A     | B     | C     | D     | E    | F    | G    | H     | J    | K    | L    | M    | N    | P     | Q     | R    | S    | T    | wt.   |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20  | .75   | .46   | 1.18  | .04  | .38  | .38  | .57   | .18  | .33  | .21  | .22  | .18  | 1.00  | .50   | .35  | .18  | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0  |

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)







REV. A  
M152326  
EDR-8792F2  
ZX95-1015+  
RAV  
150923  
Page 1 of 2

# Performance Data & Curves\*

# ZX95-1015+

| V<br>TUNE | TUNE<br>SENS<br>(MHz/V) | FREQUENCY<br>(MHz) |        |        | POWER OUTPUT<br>(dBm) |       |       | Icc<br>(mA) | HARMONICS (dBc) |       |       | FREQ.<br>PUSH<br>(MHz/V) | FREQ.<br>PULL<br>(MHz) | PHASE NOISE (dBc/Hz)<br>at offsets |        |        |        | FREQ<br>OFFSET<br>(KHz) | PHASE<br>NOISE at<br>880 MHz<br>(dBc/Hz) |
|-----------|-------------------------|--------------------|--------|--------|-----------------------|-------|-------|-------------|-----------------|-------|-------|--------------------------|------------------------|------------------------------------|--------|--------|--------|-------------------------|------------------------------------------|
|           |                         | -55°C              | +25°C  | +85°C  | -55°C                 | +25°C | +85°C |             | F2              | F3    | F4    |                          |                        | 1kHz                               | 10kHz  | 100kHz | 1MHz   |                         |                                          |
| 0.00      | 14.17                   | 723.9              | 722.6  | 721.6  | 6.71                  | 6.66  | 6.15  | 23.06       | -16.5           | -41.1 | -36.0 | 0.49                     | 0.60                   | -87.2                              | -114.8 | -136.3 | -156.6 | 1.0                     | -83.22                                   |
| 0.50      | 12.87                   | 731.0              | 729.7  | 728.7  | 6.58                  | 6.61  | 6.19  | 23.09       | -16.9           | -40.1 | -35.3 | 0.27                     | 0.51                   | -88.1                              | -115.7 | -137.1 | -156.9 | 2.0                     | -93.07                                   |
| 2.00      | 11.27                   | 749.7              | 748.4  | 747.3  | 6.31                  | 6.48  | 6.26  | 23.12       | -17.7           | -37.4 | -32.4 | 0.05                     | 0.26                   | -90.3                              | -117.2 | -138.5 | -157.1 | 3.5                     | -100.38                                  |
| 4.00      | 12.68                   | 772.9              | 771.4  | 770.0  | 6.21                  | 6.38  | 6.29  | 23.06       | -18.4           | -35.4 | -29.9 | 0.05                     | 0.19                   | -89.5                              | -117.2 | -138.7 | -156.5 | 6.0                     | -106.96                                  |
| 6.00      | 14.48                   | 799.1              | 797.7  | 796.2  | 6.16                  | 6.25  | 6.26  | 22.93       | -19.8           | -33.5 | -30.0 | 0.20                     | 0.58                   | -89.2                              | -116.9 | -138.5 | -156.2 | 8.5                     | -110.45                                  |
| 8.00      | 15.29                   | 828.5              | 827.2  | 825.7  | 6.13                  | 6.11  | 6.14  | 22.82       | -20.9           | -30.5 | -31.8 | 0.71                     | 0.75                   | -87.2                              | -116.2 | -138.0 | -156.7 | 10.0                    | -112.04                                  |
| 10.00     | 15.40                   | 859.1              | 857.9  | 856.3  | 6.11                  | 5.98  | 5.96  | 22.74       | -22.1           | -27.7 | -34.3 | 1.23                     | 0.58                   | -85.4                              | -114.1 | -136.0 | -155.4 | 20.8                    | -119.59                                  |
| 11.00     | 15.30                   | 874.5              | 873.3  | 871.7  | 6.15                  | 5.95  | 5.88  | 22.69       | -22.2           | -27.3 | -34.9 | 1.44                     | 0.39                   | -85.0                              | -112.6 | -135.0 | -154.7 | 35.5                    | -125.08                                  |
| 12.00     | 14.99                   | 889.9              | 888.6  | 886.9  | 6.20                  | 5.96  | 5.81  | 22.68       | -22.8           | -26.0 | -35.7 | 1.62                     | 0.15                   | -83.9                              | -111.7 | -134.2 | -153.9 | 60.7                    | -129.77                                  |
| 13.00     | 14.49                   | 905.1              | 903.6  | 901.9  | 6.23                  | 5.97  | 5.75  | 22.70       | -23.2           | -25.6 | -34.9 | 1.77                     | 0.62                   | -83.7                              | -111.2 | -133.7 | -153.2 | 86.7                    | -132.84                                  |
| 14.00     | 13.82                   | 919.7              | 918.1  | 916.4  | 6.25                  | 5.96  | 5.66  | 22.71       | -23.1           | -24.8 | -35.1 | 1.89                     | 1.13                   | -83.6                              | -111.2 | -133.7 | -153.5 | 100.0                   | -134.27                                  |
| 15.00     | 13.07                   | 933.6              | 931.9  | 930.3  | 6.23                  | 5.92  | 5.55  | 22.72       | -23.3           | -24.3 | -35.2 | 1.98                     | 1.48                   | -84.3                              | -111.2 | -134.1 | -153.5 | 148.1                   | -137.47                                  |
| 16.00     | 12.30                   | 946.8              | 945.0  | 943.4  | 6.23                  | 5.88  | 5.43  | 22.72       | -23.3           | -24.1 | -35.1 | 2.02                     | 1.58                   | -84.8                              | -111.0 | -134.6 | -154.0 | 177.0                   | -139.00                                  |
| 17.00     | 11.51                   | 959.1              | 957.3  | 955.6  | 6.22                  | 5.83  | 5.33  | 22.72       | -23.4           | -23.9 | -35.1 | 1.99                     | 1.50                   | -85.2                              | -111.1 | -134.6 | -154.2 | 211.6                   | -140.82                                  |
| 18.00     | 10.71                   | 970.6              | 968.8  | 967.1  | 6.22                  | 5.80  | 5.24  | 22.73       | -23.1           | -23.9 | -35.2 | 1.89                     | 1.27                   | -85.9                              | -111.0 | -134.9 | -153.8 | 302.4                   | -144.15                                  |
| 20.00     | 9.12                    | 991.2              | 989.4  | 987.5  | 6.22                  | 5.72  | 5.09  | 22.82       | -23.1           | -23.4 | -35.3 | 1.53                     | 0.43                   | -85.8                              | -111.2 | -134.5 | -153.4 | 361.5                   | -145.88                                  |
| 22.00     | 7.68                    | 1008.8             | 1006.9 | 1004.8 | 6.15                  | 5.62  | 4.94  | 22.92       | -23.1           | -23.9 | -34.6 | 1.17                     | 0.75                   | -85.5                              | -111.2 | -134.6 | -153.9 | 507.5                   | -148.37                                  |
| 24.00     | 6.45                    | 1023.5             | 1021.6 | 1019.4 | 6.06                  | 5.49  | 4.77  | 22.98       | -22.6           | -23.2 | -35.3 | 0.93                     | 1.37                   | -85.4                              | -111.0 | -134.1 | -153.2 | 606.7                   | -150.29                                  |
| 26.00     | 5.35                    | 1035.9             | 1034.0 | 1031.6 | 5.98                  | 5.35  | 4.59  | 23.03       | -22.6           | -23.2 | -34.8 | 0.81                     | 1.71                   | -86.4                              | -110.7 | -133.4 | -152.5 | 851.6                   | -153.21                                  |
| 28.00     | 4.08                    | 1046.0             | 1044.1 | 1041.4 | 5.83                  | 5.17  | 4.44  | 23.07       | -22.6           | -23.6 | -35.4 | 0.70                     | 1.77                   | -85.4                              | -110.7 | -133.2 | -152.7 | 1000.0                  | -153.92                                  |

\*at 25°C unless mentioned otherwise

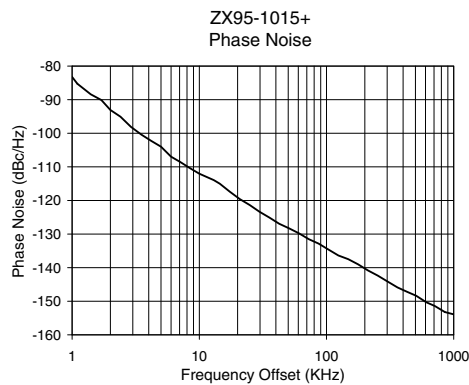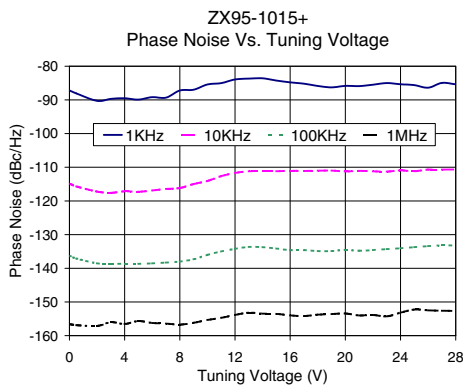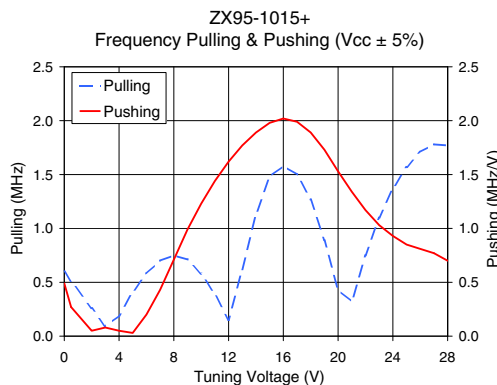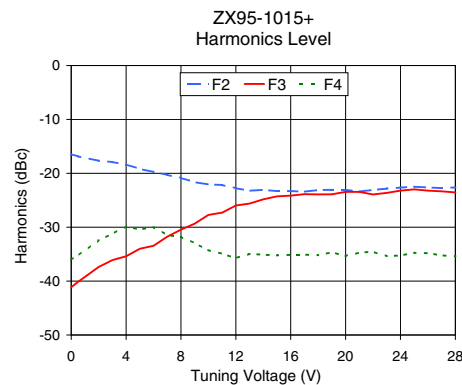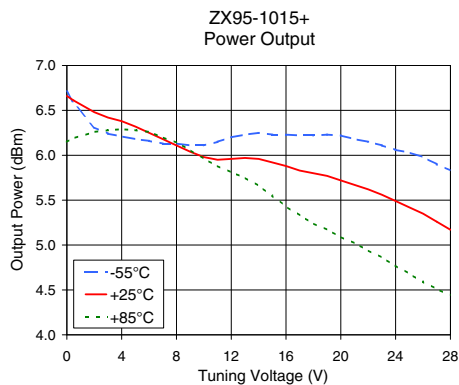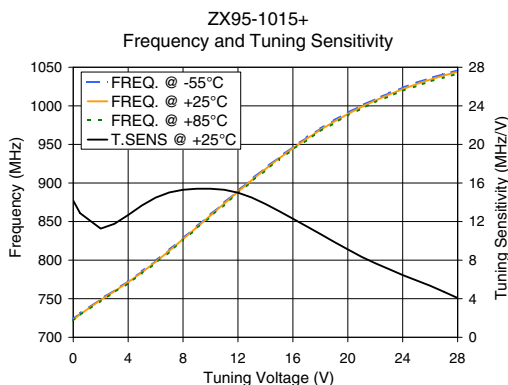

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

