

DASH NO.	M CODE	MADE FROM

GSD

780290

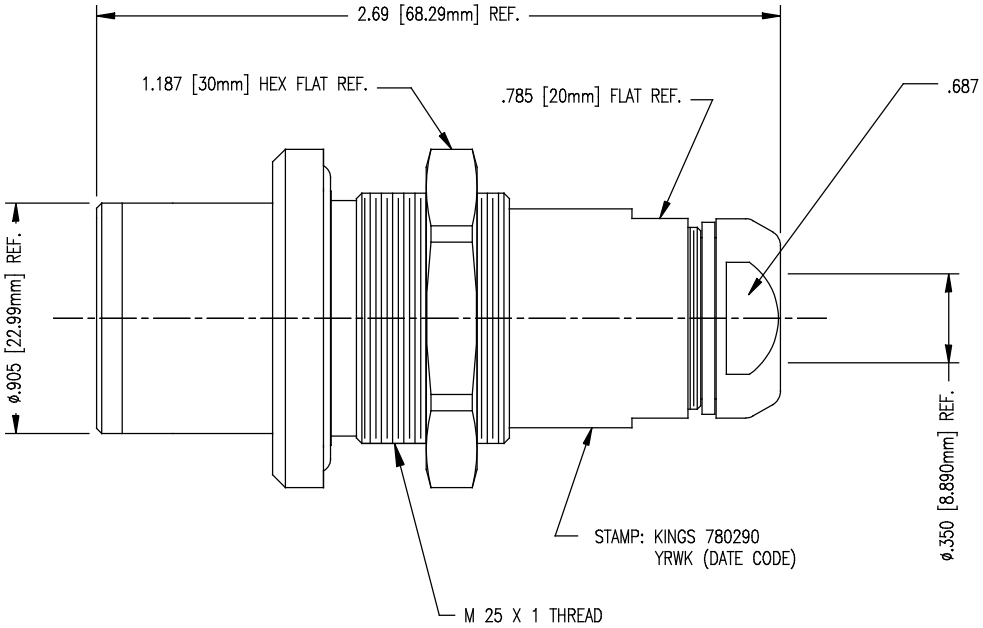



MOUNTING HOLE ø

NOTES:
1. FOR USE WITH 90 CABLE GROUP (BELDEN 7783A).
2. INTERFACE PER KINGS STANDARD ES-52, FIGURE 2.
3. FOR CABLING INSTRUCTIONS SEE 3-651 (CONVENTIONAL METHOD) OR 3-711 (PRE-PREPPED DIMENSIONS).
4. USE CRIMPING TOOL KTH-1000 W/ DIE KTH-2267 (CONTACT AND INNER SLEEVE), KTH-2260 (OUTER SLEEVE).
5. MATERIALS:
   INSULATORS: TEFLON, ASTM-D-4894
   GASKETS: SILICONE RUBBER, A-A-59588
   SPACER: DELRIN
   K-GRIP SLEEVES: COM BRONZE, ASTM-B140
   OUTER GROUND CONTACT & ENTRY BODY: BER. COPPER, ASTM-B196
   CENTER CONTACT: BER. COPPER, ASTM-B196
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
   CENTER AND OUTER CONTACT: HARD GOLD PLATE, PER ASTM-B488
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC-3.0 GHz
   VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
   INNER GROUND/OUTER GROUND: 500 VRMS

GSD

REVISIONS

ISSUE	CHANGES
0	ER 39851 HVN 03/21/07

780290 SD

SCALE 2 : 1

APPROX SURFACE AREA

USED ON

REF:

ITL, JACK, BKHD

DRAWN HVN	DATE 03/21/07
DESIGN HVN	DATE 03/20/06
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

780290