

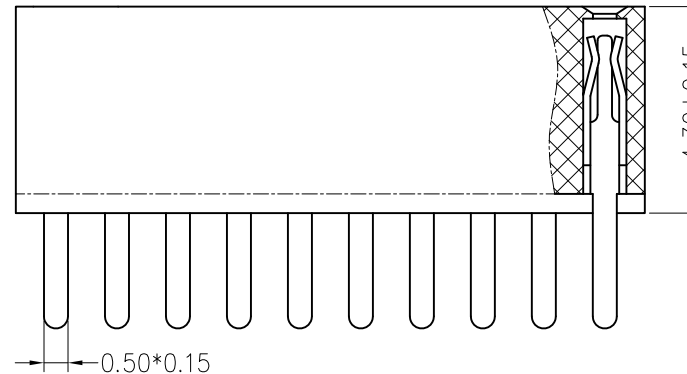
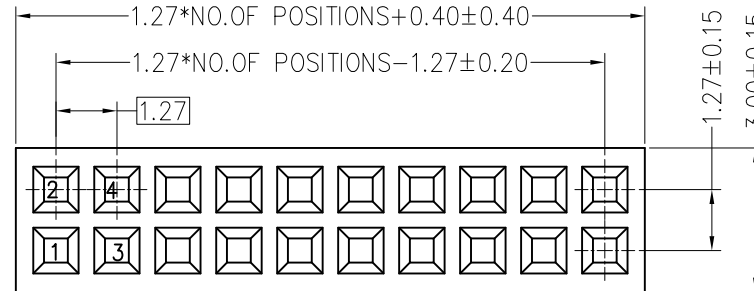


Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

NOTES:

- Voltage Rating:250V AC/DC
- Current Rating:1.0A AC/DC
- Dielectric Withstand Voltage:500V AC/minute
- Contact Voltage:20M Max.
- Insulation Voltage:1000M Min
- Operation temperature:-40 °C to +105 °C
- Insulator Material:Polyester.UL94V-0
- Contact Material:Brass
- Contact Plating:AuorSn Plated on Nickel Overall

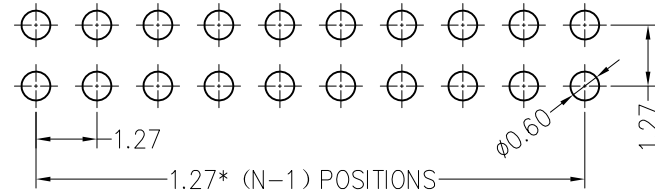

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.27mm Female Header Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°			DWG. NO.	009
AO	MODIFICATION		DRAW	DATE				PM127V-12-XX-H43			
VER											