




The **6645** is approved for use with Globespan ADSL / RADSL Line Driver IC (EL-1501) at the customer premises.

- Meets supplementary insulation requirements of IEC950 for a working voltage of 250 volts.

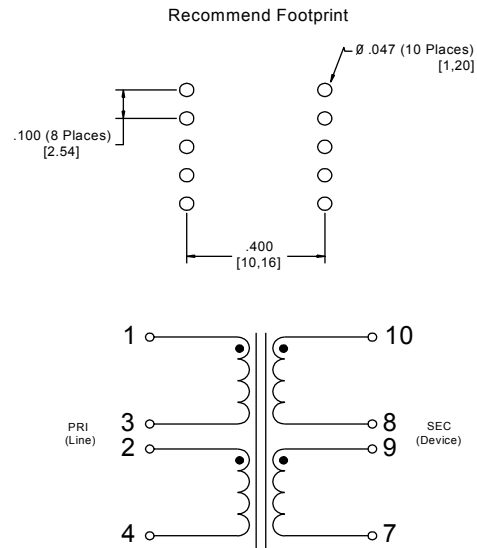

MECHANICAL

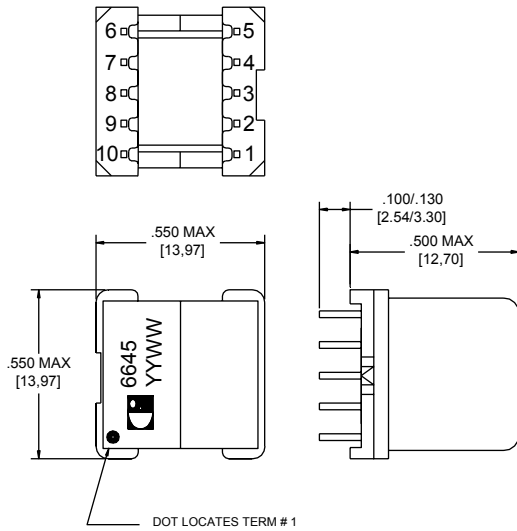

ELECTRICAL SPECIFICATION

Resistance:	1-3 0.66 ohms ± 10 %
	2-4 0.66 ohms ± 10 %
	9-7 0.56 ohms ± 10 %
	9-8 0.56 ohms ± 10 %
Longitudinal Balance:	.55 dB min., 20 kHz to 1 MHz
Frequency Response:	3.0 dB max., 30 kHz to 2 MHz
Insertion Loss:	0.5 dB max., at 772 kHz
Inductance:	.407.5 µH ± 5 %, 10 kHz,
	1.00 mVAC. 1-4 short (2+3)

Leakage Inductance:	10.0 µH Max., 100 kHz,
	100 mVAC. 1-4 short (2+3,8+9,7+10)
Turns Ratio : PRI – SEC:	1 : 1 ± 2 %
Total Harmonic Distortion:	.85 dB min., 100 kHz,
	15 Vp-p drive signal at PRI.
Dielectric Test:	1875 VAC, PRI – SEC

ISSUE: 00/07/11 6645