AME

AME8853A

High PSRR, Low Noise, 300mA CMOS Regulator

■ General Description

The AME8853A family of positive, CMOS linear regulators provide low dropout voltage(220mV@300mA), low quiescent current, and low noise CMOS LDO. These rugged devices have both Thermal Shutdown, and Current limit to prevent device failure under the "Worst" of operating conditions.


■ Features

- Low Dropout Voltage: 220mV@300mA
- Guaranteed Current: 300mA
- Quiescent Current: 60μA (typ.)
- Over-Temperature Shutdown
- Current Limiting protection
- PSRR: 60dB@10KHz
- Ultra-Low-Noise: 100μV_{RMS} at 1Hz to 100KHz
- Low Temperature Coefficient
- Input Voltage Range : 2.5V~5.5V
- Output Voltage Range: 0.8V~ 4.3V
- Green Products Meet RoHS Standards


■ Applications

- Instrumentation
- Portable Electronics
- Wireless Devices
- Cordless Phones
- PC Peripherals
- Battery Powered Widgets

■ Typical Application

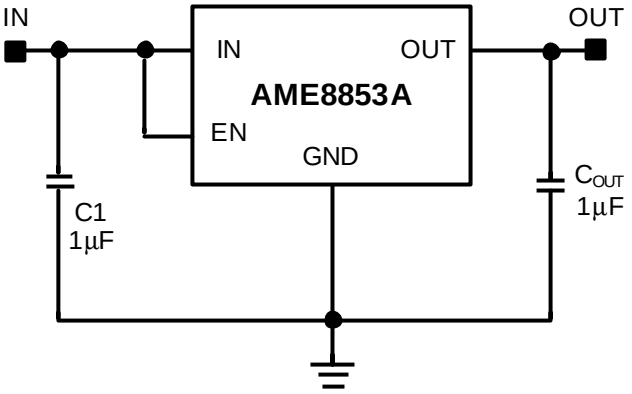


■ Functional Block Diagram

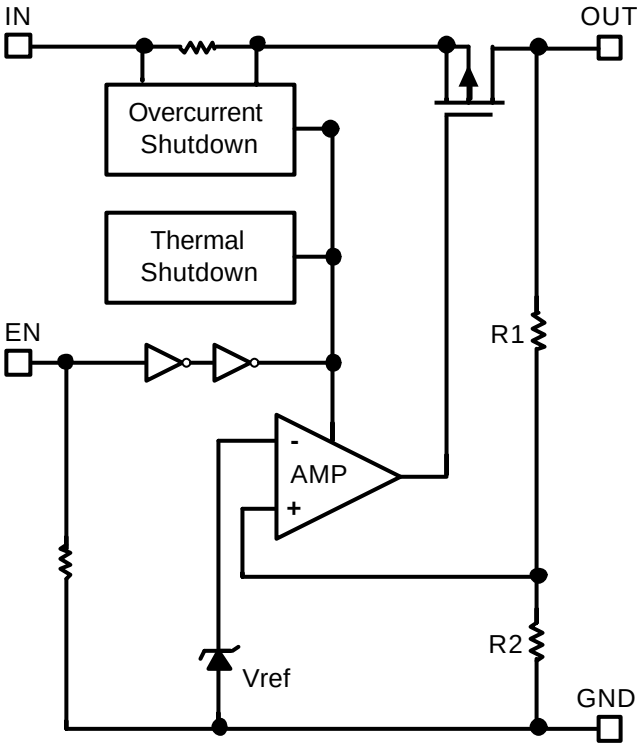

■ Pin Configuration

SC-70-5
Top View




AME8853A-AIVxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

*** Die Attach:**
Conductive Epoxy

SOT-25/TSOT-25A
Top View




AME8853A-AEVxxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

*** Die Attach:**
Conductive Epoxy

SOT-23
Top View




AME8853A-AETxxx

1. GND
2. OUT
3. IN

*** Die Attach:**
Non-Conductive Epoxy

SC-70-4 (SC-82)
Top View



AME8853A-AIUxxx

1. EN
2. GND
3. OUT
4. IN

*** Die Attach:**
Conductive Epoxy

■ Pin Description

SC-70-5

Pin Number	Pin Name	Pin Description
1	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.
2	GND	Ground connection pin.
3	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin floating outside, it is pulled low by internal small current source.
4	NC	No connection.
5	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.

SOT-25/TSOT-25A

Pin Number	Pin Name	Pin Description
1	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.
2	GND	Ground connection pin.
3	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin floating outside, it is pulled low by internal small current source.
4	NC	No connection.
5	OUT	LDO voltage regulator output pin; should be decoupled with a 1µF or greater value low ESR ceramic capacitor.

■ Pin Description (Contd.)

SOT-23


Pin Number	Pin Name	Pin Description
1	GND	Ground connection pin.
2	OUT	LDO voltage regulator output pin; should be decoupled with a 1µF or greater value low ESR ceramic capacitor.
3	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.

SC-70-4(SC-82)

Pin Number	Pin Name	Pin Description
1	EN	Enable pin, Active "high". When pulled "low", the PMOS pass transistor turns off, current consuming less than 1µA. When EN pin floating outside, it is pulled low by internal small current source.
2	GND	Ground connection pin.
3	OUT	LDO voltage regulator output pin; should be decoupled with a 1.0µF or greater value low ESR ceramic capacitor.
4	IN	Input voltage pin; should be decoupled with 1µF or greater capacitor.

■ Ordering Information

AME8853A - x x x xxx x

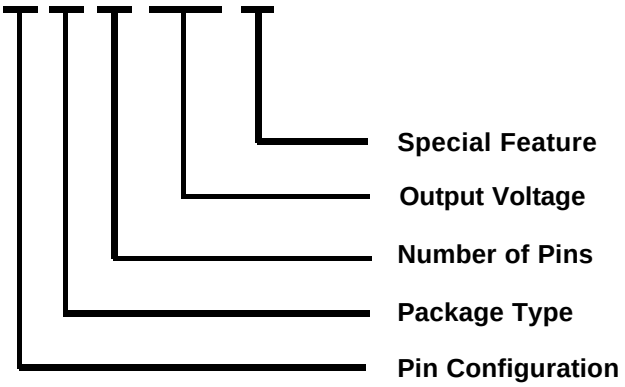

Pin Configuration	Package Type	Number of Pins	Output Voltage	Special Feature
A (SC-70-5): 1. IN, 2. GND, 3. EN, 4. NC, 5. OUT A (SOT-25) (TSOT-25A): 1. IN, 2. GND, 3. EN, 4. NC, 5. OUT A (SC-70-4/ SC-82): 1. EN, 2. GND, 3. OUT, 4. IN A (SOT-23): 1. GND, 2. OUT, 3. IN	E: SOT-2X I: SC-70 (SC-82)	T: 3 U: 4 V: 5	080: 0.8V 090: 0.9V 100: 1.0V 110: 1.1V 120: 1.2V 130: 1.3V 140: 1.4V 150: 1.5V 180: 1.8V 250: 2.5V 280: 2.8V : : : : 420: 4.2V 430: 4.3V	N/A: SOT-2X K: 0.9mm max height (for TSOT-2XA Only)

■ Absolute Maximum Ratings

Parameter	Symbol	Maximum	Unit
Input Voltage	V_{IN}	-0.3 to 6	V
EN Voltage	V_{EN}	-0.3 to 6	V
Output Current	I_{OUT}	$P_D/(V_{IN}-V_{OUT})$	mA
Output Voltage	V_{OUT}	GND-0.3 to V_{IN}+0.3	V
ESD Classification	HBM	2	kV
	MM	200	V

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	- 40 to +85	^oC
Junction Temperaturen Range	T_J	- 40 to +125	^oC
Storage Temperaturen Range	T_{STG}	- 65 to +150	^oC

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance* (Junction to Case)	SC-70-5	Conductive Epoxy	θ_{JC}	224	°C / W
	SC-70-4(SC-82)				
	SOT-25			81	
	TSOT-25A			81	
	SOT-23	Non-Conductive Epoxy		140	
Thermal Resistance (Junction to Ambient)	SC-70-5	Conductive Epoxy	θ_{JA}	331	°C / W
	SC-70-4(SC-82)				
	SOT-25			260	
	TSOT-25A			230	
	SOT-23	Non-Conductive Epoxy		280	
Internal Power Dissipation	SC-70-5	Conductive Epoxy	P_D	300	mW
	SC-70-4(SC-82)				
	SOT-25			400	
	TSOT-25A			455	
	SOT-23	Non-Conductive Epoxy		400	
Lead Temperature (Soldering, 10Sec.)**				260	°C

* Measure θ_{JC} on backside center of molding compound if IC has no tab.
** MIL-STD-202G 210F

■ Electrical Specifications

V_{IN}=$V_{OUT(NOM)}$ +1V, (for V_{OUT}<2V, V_{IN}=2.5V), I_{OUT}=1mA, and C_{OUT}=1µF, C_{IN}=1µF unless otherwise noted. Typical values are at T_A=25ºC.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Input Voltage	V_{IN}		2.5		5.5	V
Output Accuracy	$V_{OUT,ACC}$	I_{OUT}=1mA	-2.0		2.0	%
Output Voltage Range	V_{OUT}		0.8		4.3	V
Dropout Voltage (Note 1)	V_{DROP}	I_{OUT}=300mA, 0.8V≦$V_{OUT(NOM)}$≦2.0V			Note2	mV
		I_{OUT}=300mA, 2.0V<$V_{OUT(NOM)}$≦2.4V			500	
		I_{OUT}=300mA, 2.4V<$V_{OUT(NOM)}$≦2.8V			400	
		I_{OUT}=300mA, 2.8V<$V_{OUT(NOM)}$		220	300	
Output Current	I_{OUT}		300			mA
Quiescent Current	I_Q	I_{OUT}=0mA		60	90	µA
Line Regulation $\frac{\frac{\Delta V_{OUT}}{\Delta V_{IN}}\times 100\%}{V_{OUT}}$	REG_{LINE}	I_{OUT}=1mA, 0.8V≦V_{OUT}≦1.2V, 2.5V≦V_{IN}≦3.5V		0.125	0.25	%/V
		I_{OUT}=1mA, 1.2V<V_{OUT}≦2.0V, 2.5V≦V_{IN}≦3.5V		0.1	0.2	
		I_{OUT}=1mA, 2.0V<V_{OUT}≦4.2V, $V_{IN(MIN)}$≦V_{IN}≦$V_{IN(MIN)}$+1V		0.05	0.1	
		I_{OUT}=1mA, 4.2V<V_{OUT}≦4.5V, $V_{IN(MIN)}$≦V_{IN}≦5.5V		0.05	0.1	
Load Regulation $\frac{\frac{\Delta V_{OUT}}{V_{OUT}}\times 100\%}{\Delta I_{OUT}}$	REG_{LOAD}	1mA≦I_{OUT}≦300mA 0.8V≦$V_{OUT(NOM)}$≦1.2V		1.5	3.0	%/A
		1mA≦I_{OUT}≦300mA 1.2V≦$V_{OUT(NOM)}$≦2.0V		1.25	2.5	
		1mA≦I_{OUT}≦300mA 2.0V<$V_{OUT(NOM)}$		1.0	2	

■ Electrical Specifications (Contd.)

Parameter	Symbol	Test Condition		Min	Typ	Max	Units
Power Supply Rejection Ration	PSRR	C_{OUT}=1uF, V_{OUT}=0.8V I_{OUT}=10mA V_{IN}=2.8V	F=100Hz		60		dB
			F=1KHz		60		
			F=10KHz		60		
Output Voltage Noise	eN	I_{OUT}=10mA, V_{OUT}=0.8V, f=1Hz to 100KHz			100		μV_{RMS}
Enable High (enabled)	$V_{EN,HI}$	$V_{IN(MIN)} \leqq V_{IN} \leqq 5.5V$		1.4		V_{IN}	V
Enable Low(shutdown)	$V_{EN,LO}$	$V_{IN(MIN)} \leqq V_{IN} \leqq 5.5V$		0		0.4	
Enable Input Bias Current	$I_{EN,HI}$	$V_{EN} = V_{IN}$				8	µA
	$I_{EN,LO}$	V_{EN} = 0V				1	
Shutdown Current	I_{SHDN}	V_{IN}=5.0V, V_{EN}=0V			0.1	1	µA
Shutdown Output Voltage	$V_{OUT,SD}$	I_{OUT}=0.4mA, V_{EN}=0				0.4	V
Protection							
Output Current Limit	I_{LIM}	V_{OUT}=0.9 x $V_{OUT(NOM)}$		400			mA
Thermal Shutdown Temperature	T_{SHDN}	Shutdown, temperature increasing			150		°C
Thermal Shutdown Hysteresis	$T_{SHDN(HYS)}$				20		

Note1: Dropout Voltage is measured at V_{OUT}=$V_{OUT(NOM)}$x98%
Note2:For V_{OUT} below 2.0V, Dropout Voltage is the input$_{(MIN)}$ to output differential.

■ Detailed Description

The AME8853A family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection thermal shutdown, and Power Good detection circuitry.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150°C, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops more 20°C.

Capacitor Selection and Regulator Stability

The AME8853A is stable with an output capacitor to ground of 1µF or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1µF ceramic capacitor with a 10µF Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize V_{IN}. The input capacitor should be at least 0.1µF to have a beneficial effect.

Enable Pin

The Enable Pin is pull-low. When activated pulled low, the MOS pass transistor shuts off, and all internal circuits are powered down. In this state, the stand by current is less than 1µA.

Capacitor Selection and Regulator Stability


The maximum output power of the AME8853A is limited by the maximum power dissipation of the package. By calculation the power dissipation of the package as a function of the input voltage, output voltage and output current, the maximum input voltage can be obtained. The maximum power dissipation should not exceed the package's maximum power rating.

$$P_{MAX} = (V_{IN(MAX)}-V_{OUT}) \times I_{OUT}$$


Where:
$V_{IN(MAX)}$ = maximum input voltage
P_{MAX} = maximum power dissipation of the package

■ Characterization Curve


Output Voltage

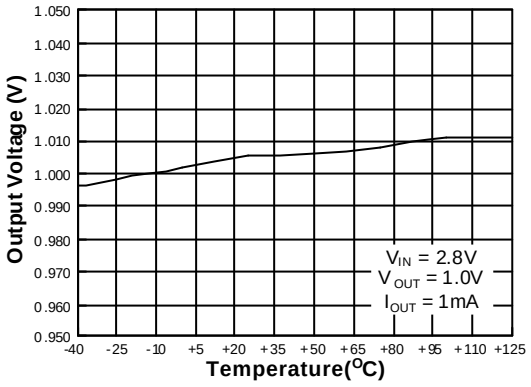


Output Voltage

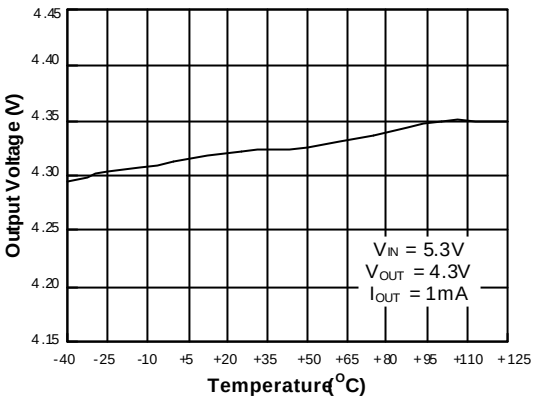


Quiescent Current

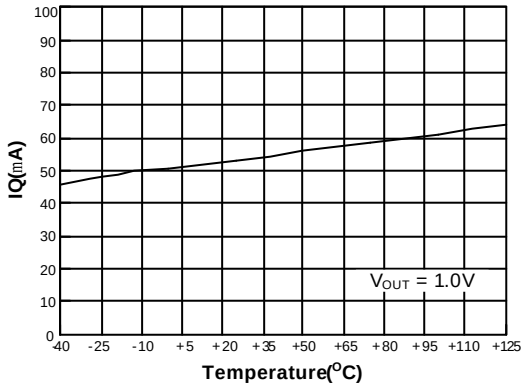


Quiescent Current

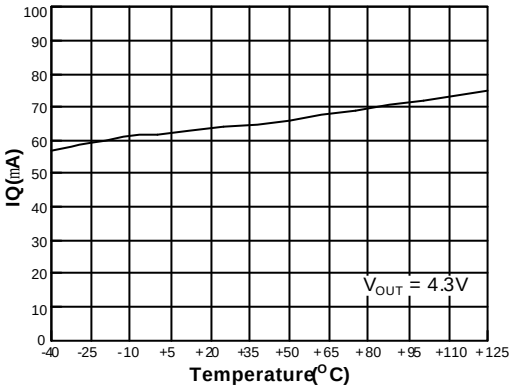

Current Limit vs. Input Voltage

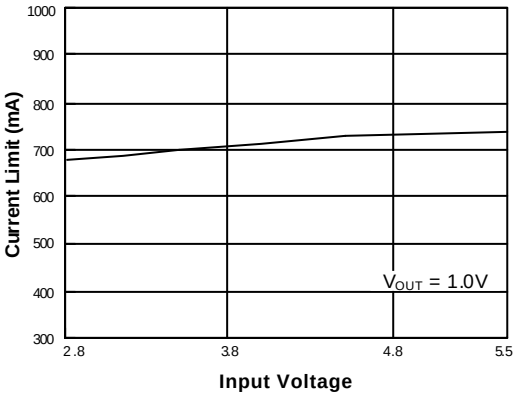


Current Limit vs. Input Voltage

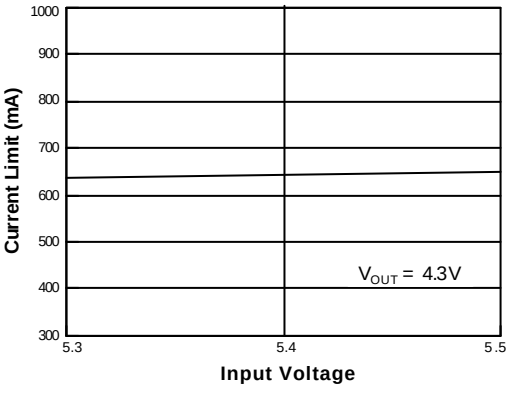


■ Characterization Curve (Contd.)


Dropout Voltage

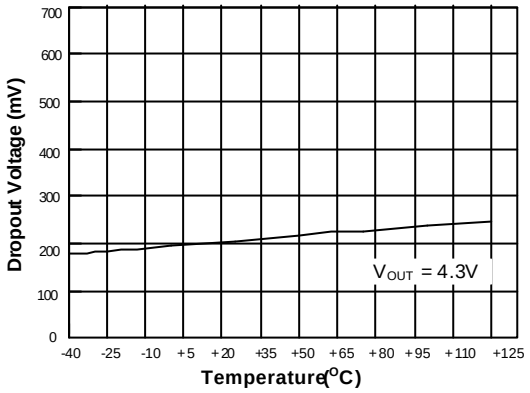


Stability vs. ESR vs. Load Current

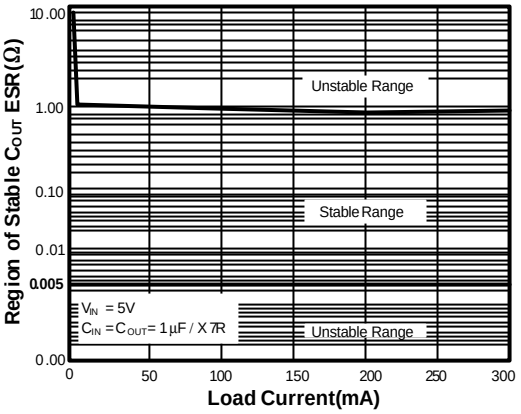


PSRR vs. Frequency

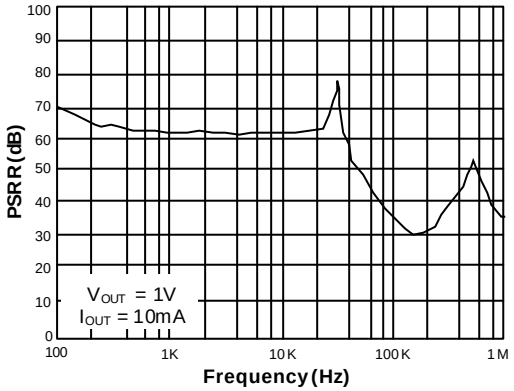


PSRR vs. Frequency

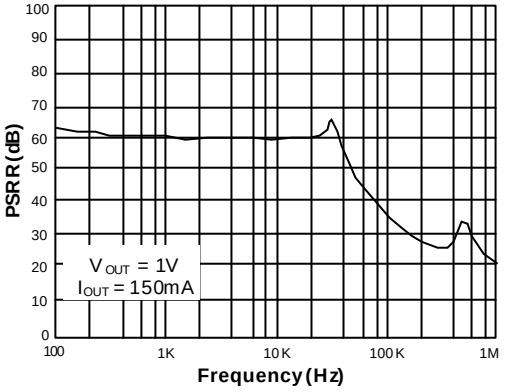

PSRR vs. Frequency

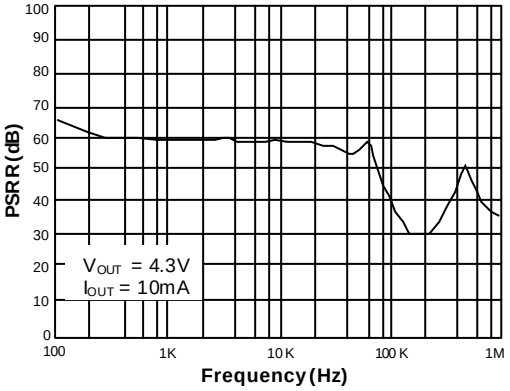


PSRR vs. Frequency

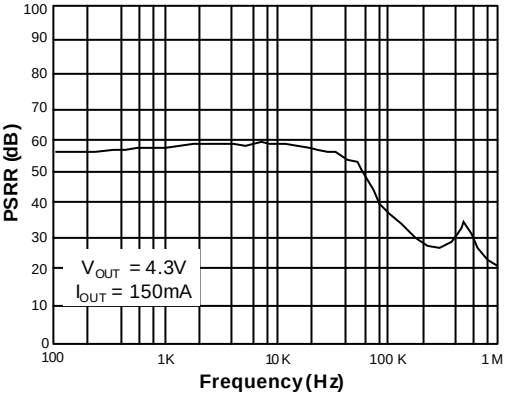


■ Characterization Curve (Contd.)


Line Transient Response

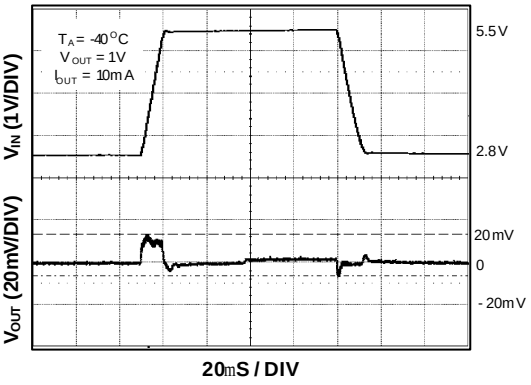


Line Transient Response

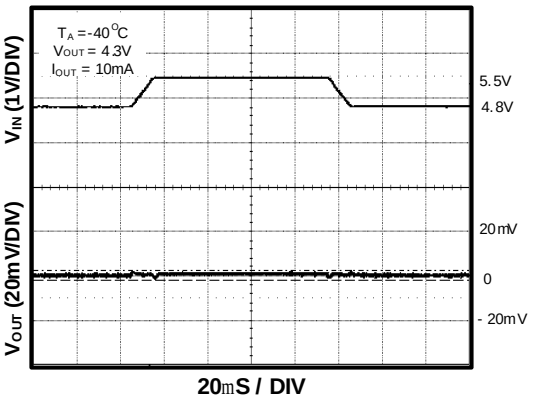


Line Transient Response

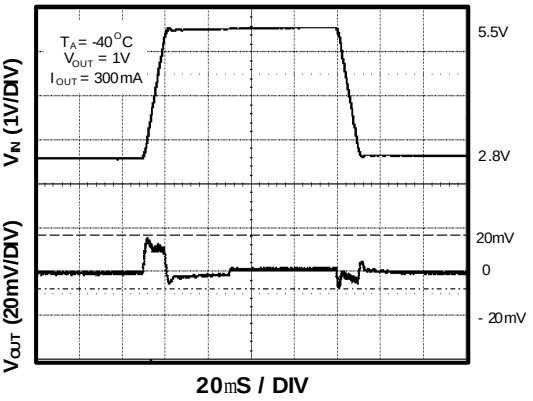


Line Transient Response

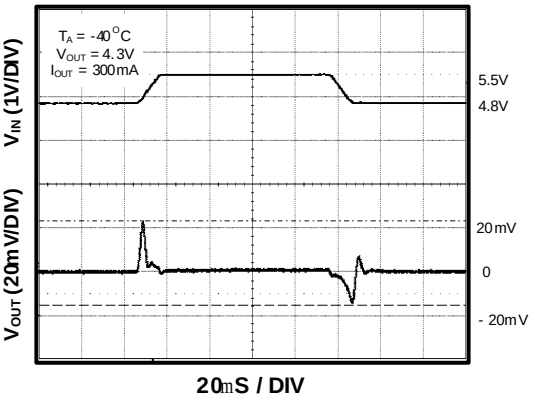

Line Transient Response

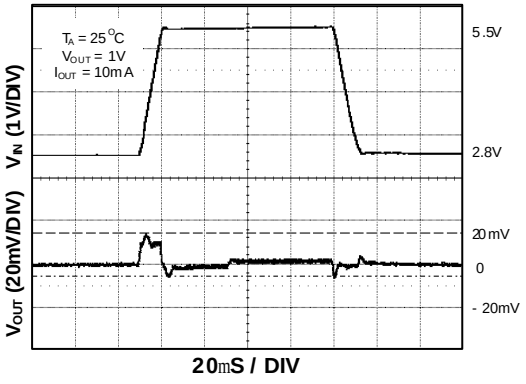


Line Transient Response

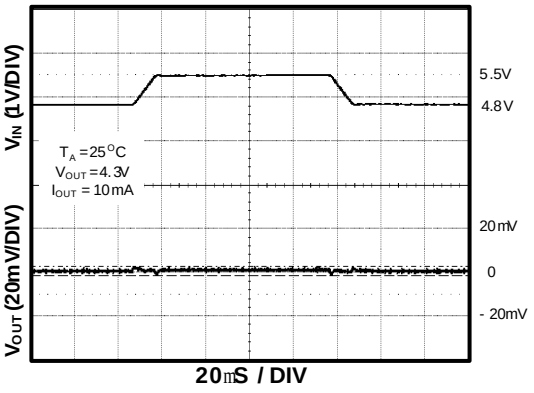


■ Characterization Curve (Contd.)


Line Transient Response

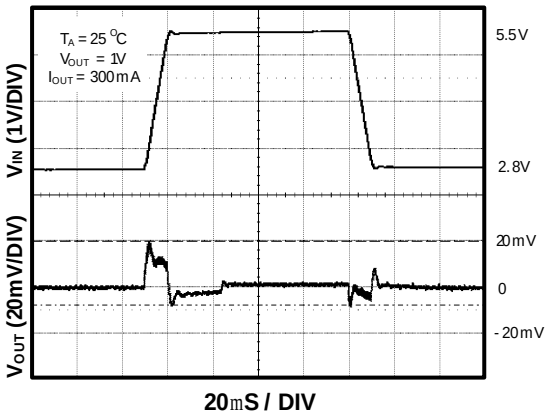


Line Transient Response

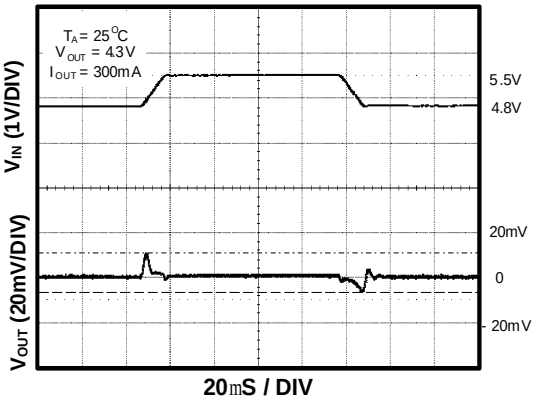


Line Transient Response

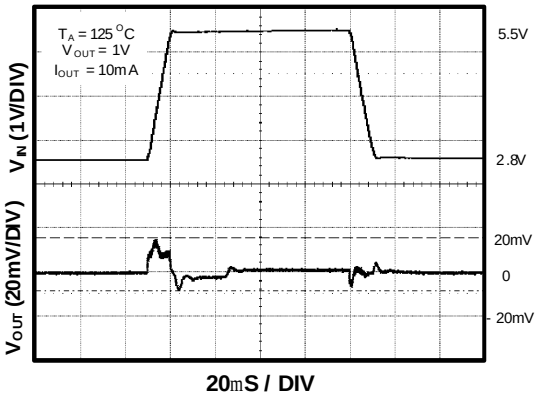


Line Transient Response

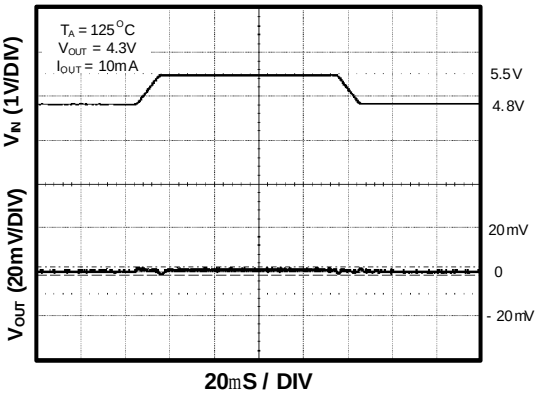

Line Transient Response

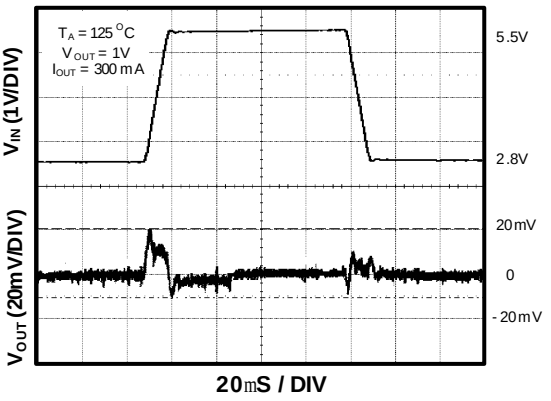


Line Transient Response

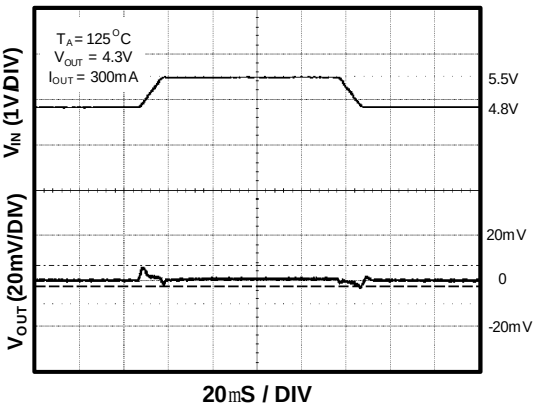


■ Characterization Curve (Contd.)

Chip Enable Transient Response

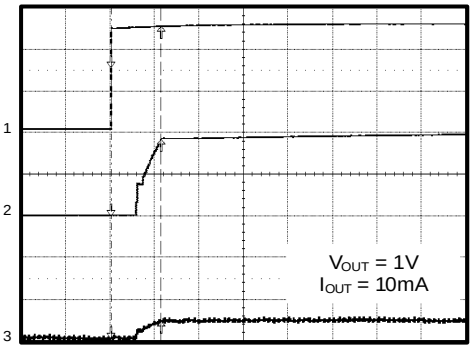


1) EN= 1V/div
2) V_{OUT}= 500mV/div
3) I_{OUT} = 20mA/div

Chip Enable Transient Response

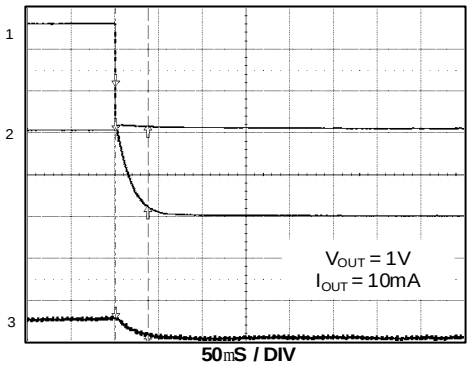


1) EN= 1V/div
2) V_{OUT}= 500mV/div
3) I_{OUT} = 20mA/div

Chip Enable Transient Response

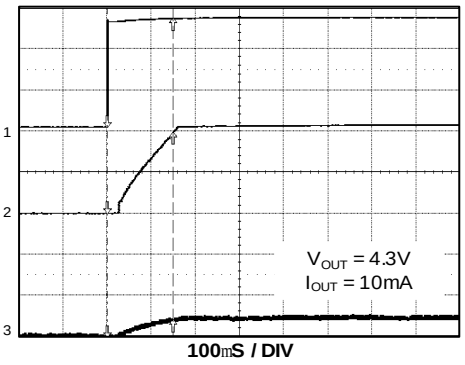

1) EN= 2V/div
2) V_{OUT}= 2V/div
3) I_{OUT} = 20mA/div


Chip Enable Transient Response

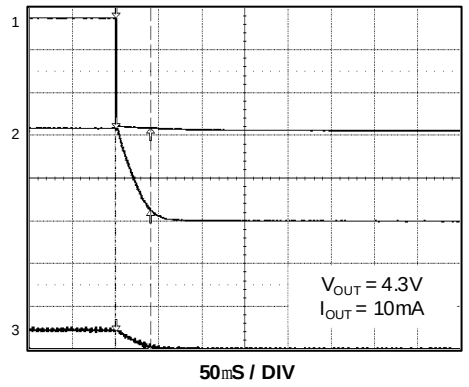


1) EN= 2V/div
2) V_{OUT}= 2V/div
3) I_{OUT} = 20mA/div

■ Characterization Curve (Contd.)


Load Transient Response

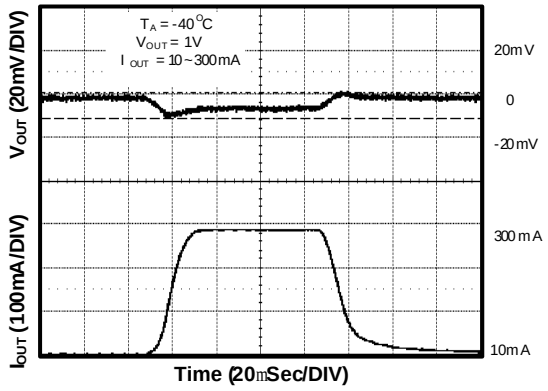


Load Transient Response

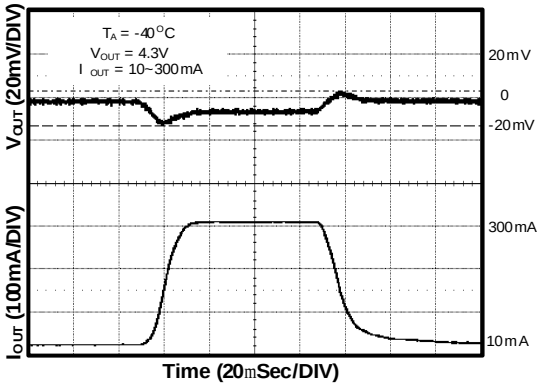


Load Transient Response

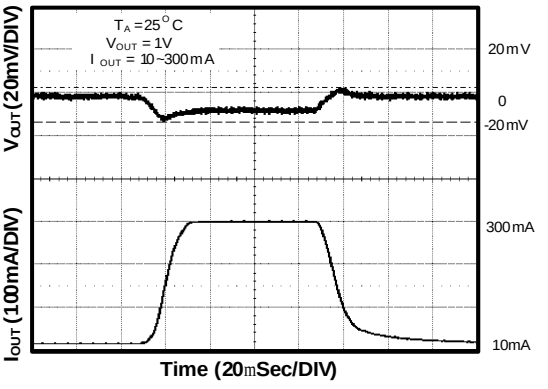


Load Transient Response

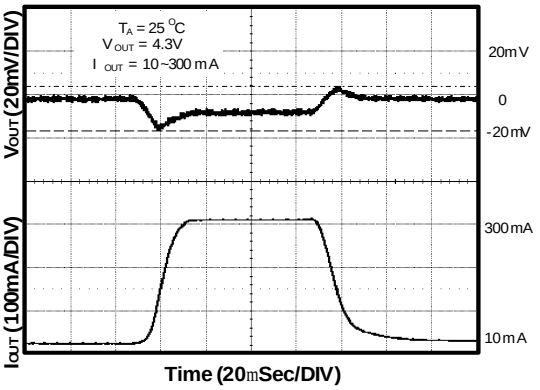

Load Transient Response

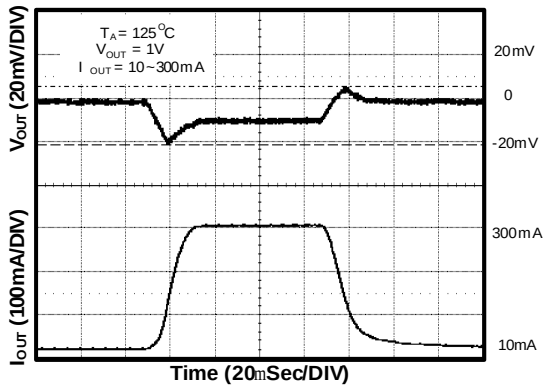


Load Transient Response

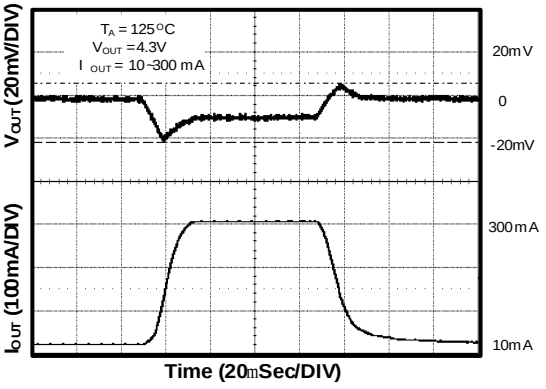

■ Characterization Curve (Contd.)


Chip Enable Transient Response

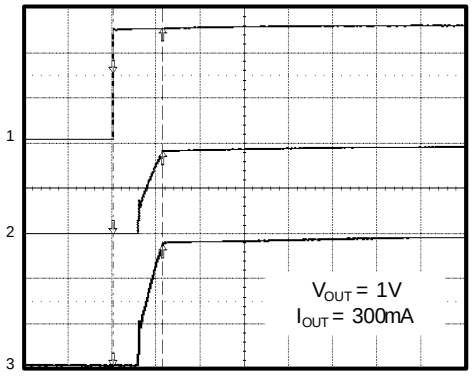

50㎳S / DIV

1) EN= 1V/div
2) V_{OUT}= 500mV/div
3) I_{OUT} = 100mA/div


Chip Enable Transient Response

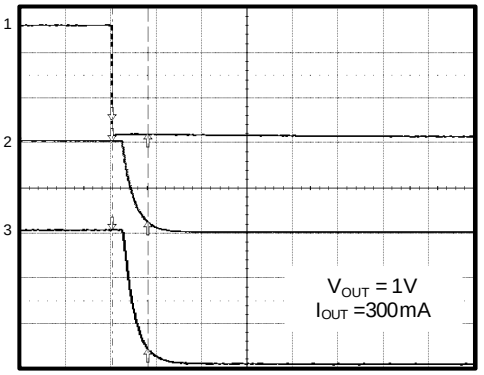

10㎳S / DIV

1) EN= 1V/div
2) V_{OUT}= 500mV/div
3) I_{OUT} = 100mA/div


Chip Enable Transient Response

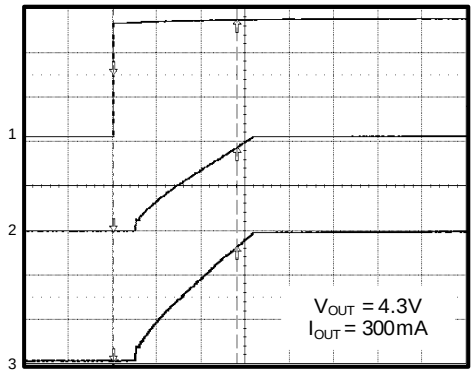

50㎳S / DIV

1) EN= 2V/div
2) V_{OUT}= 2V/div
3) I_{OUT} = 100mA/div

Chip Enable Transient Response

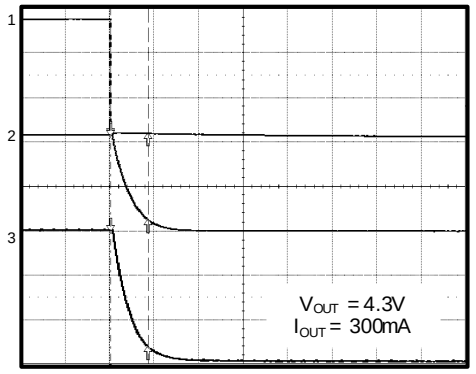


20㎳S / DIV

1) EN= 2V/div
2) V_{OUT}= 2V/div
3) I_{OUT} = 100mA/div

■ Tape and Reel Dimension


SC-70-5

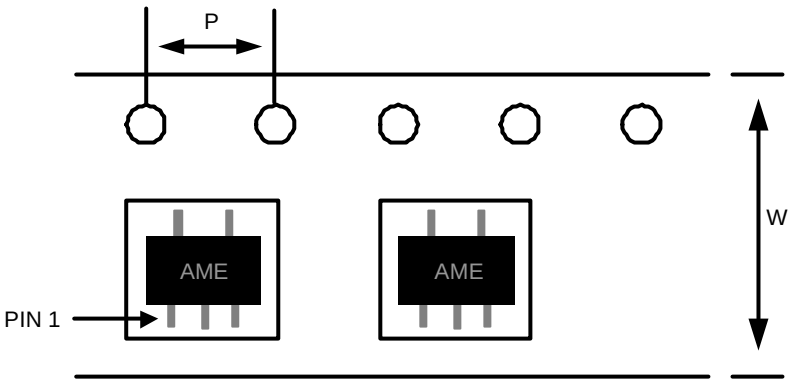

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-5	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-25

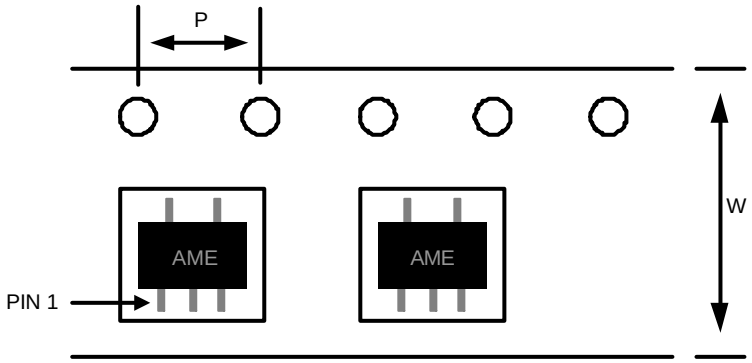


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

■ Tape and Reel Dimension (Contd.)


TSOT-25A

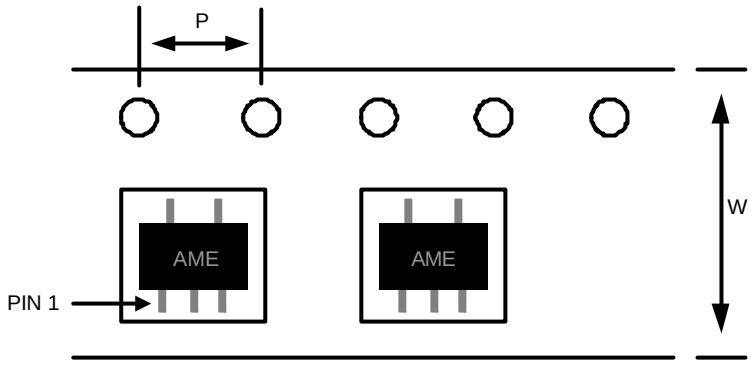

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-25A	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-23

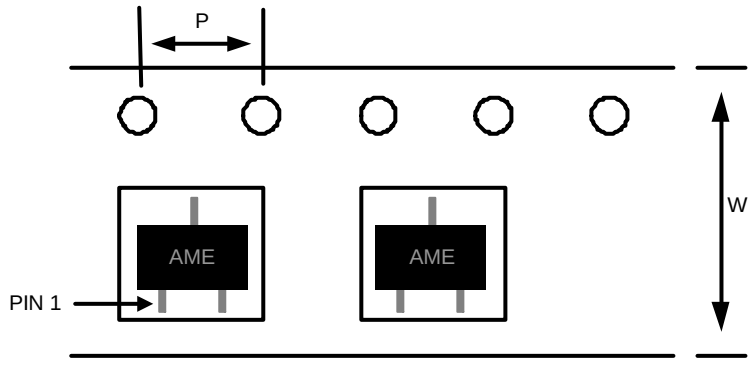


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-23	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

■ Tape and Reel Dimension (Contd.)

SC-70-4 (SC-82)

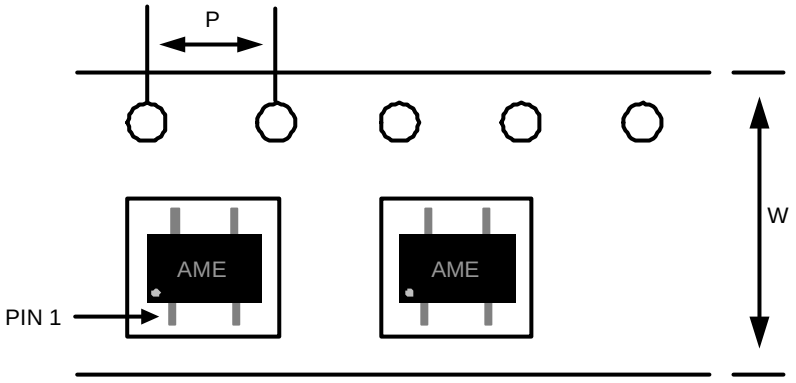


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-4	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

■ Package Dimension (Contd.)


SC-70-5

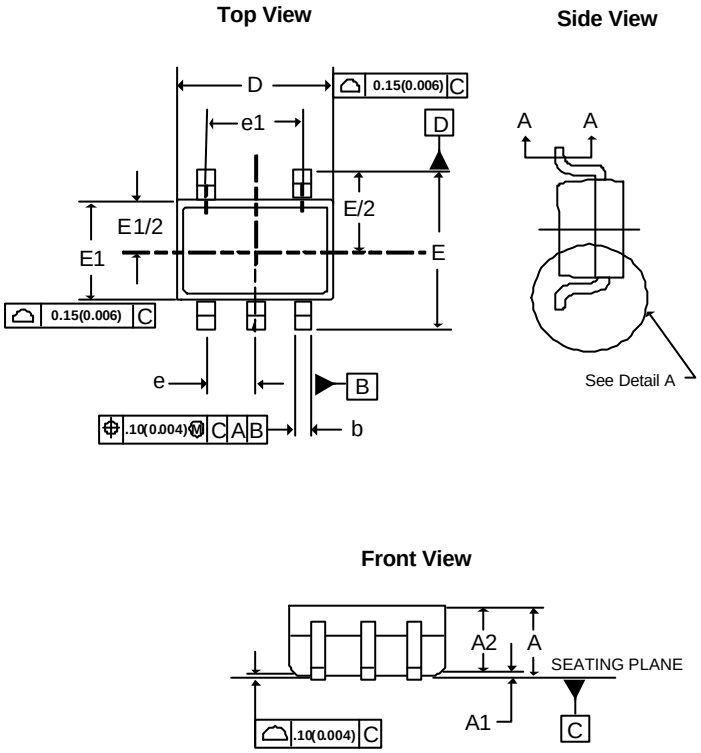

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	0.00	0.10	0.0000	0.0039
A2	0.80	1.00	0.0315	0.0394
b	0.15	0.35	0.0059	0.0138
b1	0.15	0.25	0.0059	0.0098
c	0.08	0.25	0.0031	0.0098
c1	0.08	0.20	0.0031	0.0079
D	1.85	2.20	0.0728	0.0866
E	1.80	2.45	0.0709	0.0965
E1	1.10	1.40	0.0433	0.0551
e	0.65 BSC		0.0255 BSC	
e1	1.20	1.40	0.0472	0.0551
L	0.26	0.46	0.0102	0.0181
q1	0^o	8^o	0^o	8^o
q	4^o	10^o	4^o	10^o


■ Package Dimension (Contd.)

SOT-25

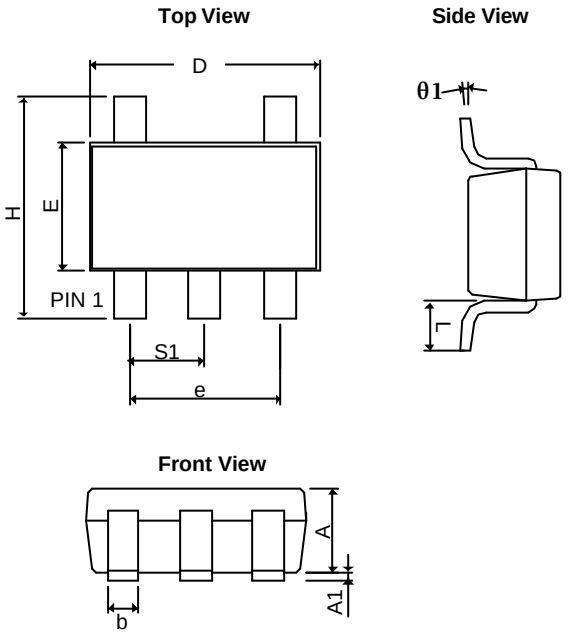

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.30	0.0354	0.0512
A_1	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.60	3.00	0.1024	0.1181
L	0.37 BSC		0.0146 BSC	
q1	0^o	10^o	0^o	10^o
S_1	0.95 BSC		0.0374 BSC	


TSOT-25A

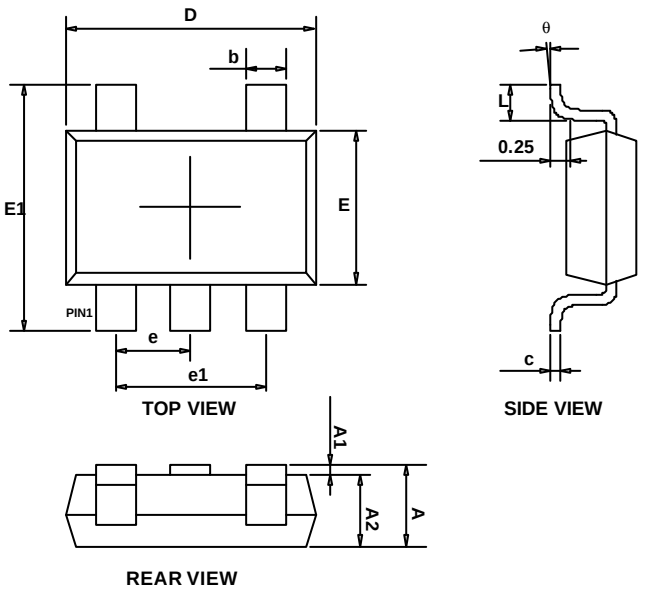

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b	0.350	0.500	0.014	0.020
c	0.080	0.200	0.003	0.008
D	2.820	3.020	0.111	0.119
E	1.600	1.700	0.063	0.067
E1	2.650	2.950	0.104	0.116
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
q	0^o	8^o	0^o	8^o


■ Package Dimension (Contd.)

SOT-23

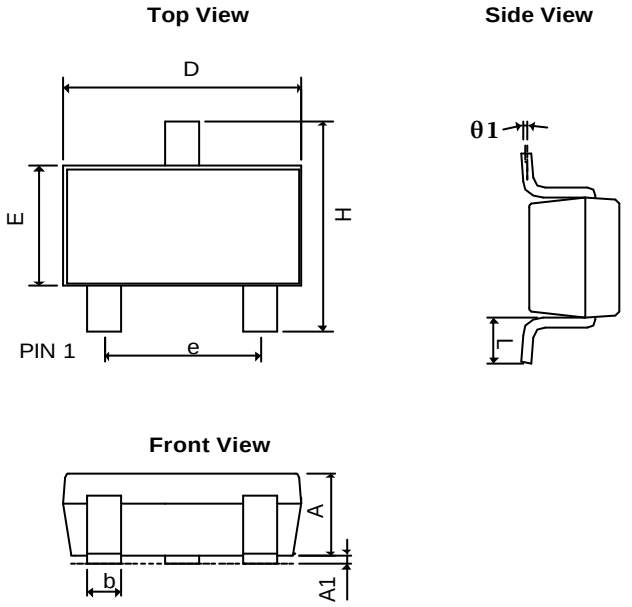

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.40	0.0354	0.0551
A_1	0.00	0.15	0.0000	0.0059
b	0.30	0.50	0.0118	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.0945	0.1181
L	0.35BSC		0.0138 BSC	
q1	0^o	10^o	0^o	10^o


SC-70-4 (SC-82)

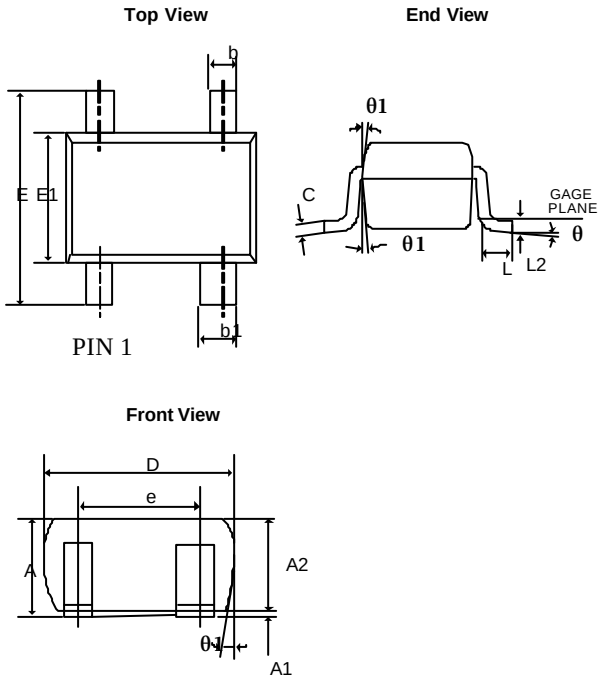

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.250	0.400	0.010	0.016
b1	0.350	0.500	0.014	0.020
c	0.080	0.150	0.003	0.006
d	0.050 TYP		0.002 TYP	
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0^o	8^o	0^o	8^o

■ Lead Pattern

SC-70-5

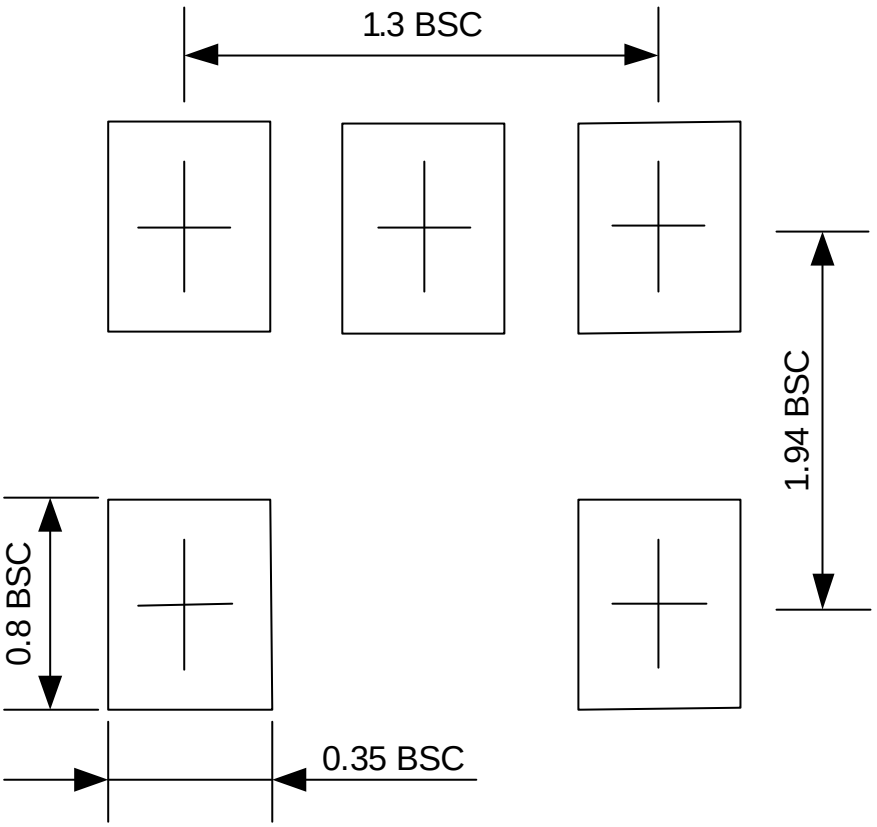


Note:

1. Lead pattern unit description:
   BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance ±0.05mm unless otherwise specified.

■ Lead Pattern (Contd.)

SOT-25

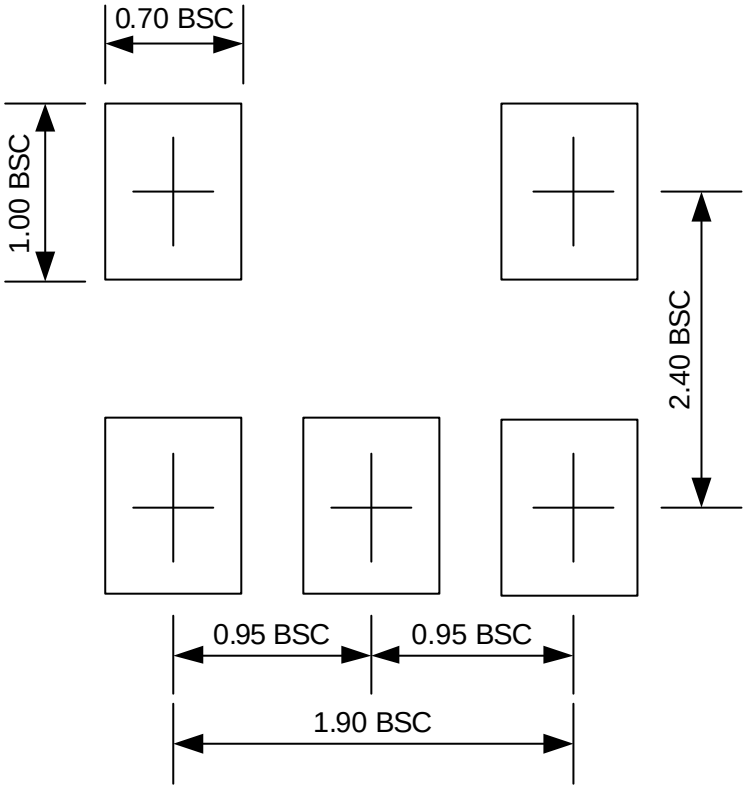


Note:

1. Lead pattern unit description:
   BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance ±0.05mm unless otherwise specified.

■ Lead Pattern (Contd.)

TSOT-25A

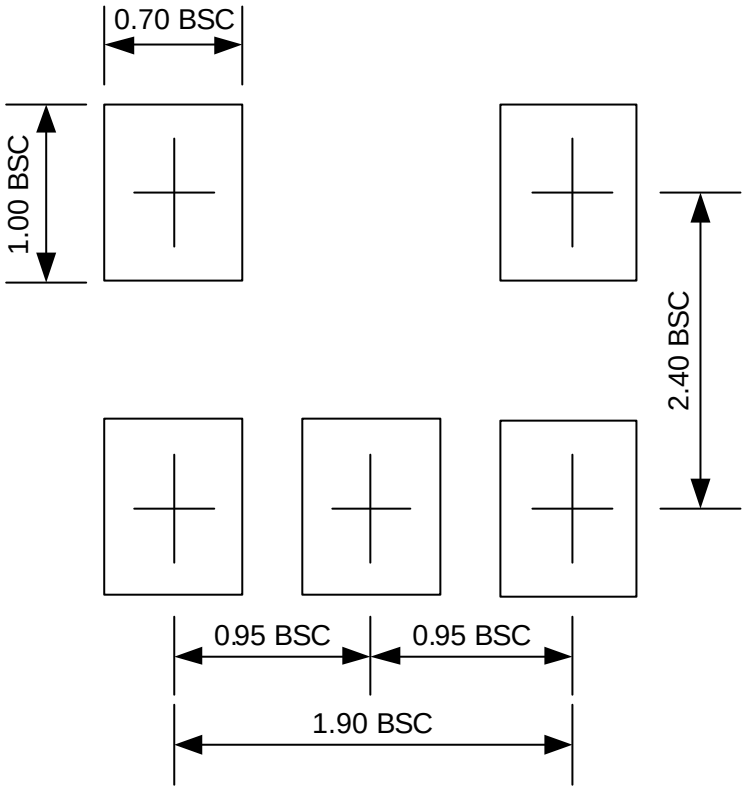


Note:

1. Lead pattern unit description:
   BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance ±0.05mm unless otherwise specified.

■ Lead Pattern (Contd.)

SC-70-4/SC-82

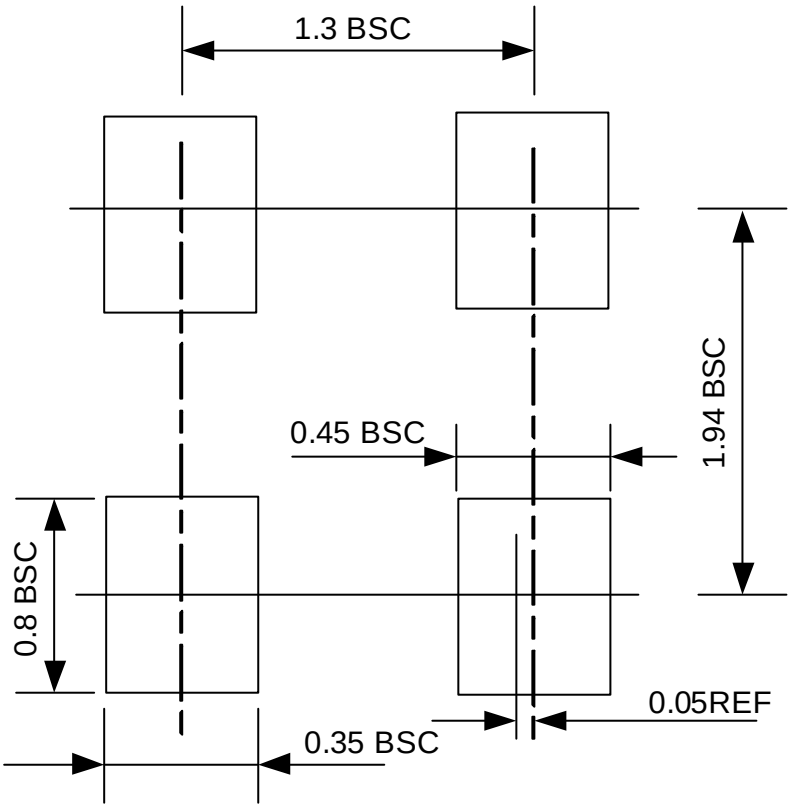


Note:

1. Lead pattern unit description:
   BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance ±0.05mm unless otherwise specified.

■ Lead Pattern (Contd.)

SOT-23

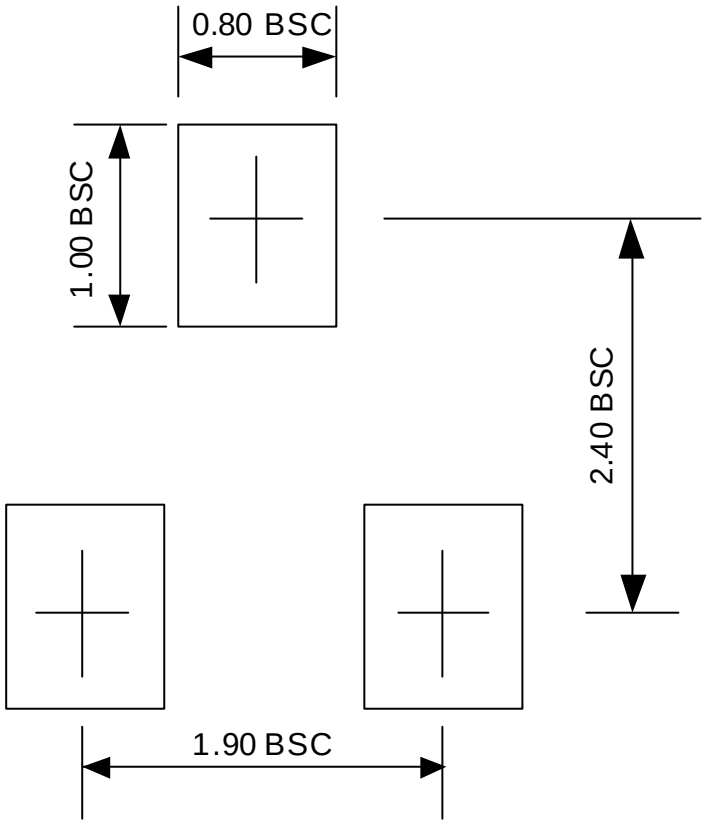

Note:

1. Lead pattern unit description:
   BSC: Basic. Represents theoretical exact dimension or dimension target.
2. Dimensions in Millimeters.
3. General tolerance ±0.05mm unless otherwise specified.



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:
These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.
AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.
© AME, Inc. , March 2012
Document: TM001-DS8853A-C.01

Corporate Headquarter
AME, Inc.
8F, 12, WenHu St., Nei Hu
Taipei, Taiwan. 114
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989