



UK3018BW

Preliminary

Power MOSFET

**2.5V DRIVE SILICON
N-CHANNEL MOSFET**



■ DESCRIPTION

The UTC **UK3018BW** is a Silicon N-channel MOSFET, designed to minimize on-state resistance while it provides rugged, reliable and fast switching performance. The product is particularly suited for low voltage and low current applications such as small servo motor controllers, power MOSFET gate drivers, and other switching applications.

■ FEATURES

- * Min $V_{DSS} = 30V$
- * $R_{DS(ON)} < 5\Omega @ V_{GS}=4V$
- * $R_{DS(ON)} < 7\Omega @ V_{GS}=2.5V$
- * Pulsed $I_D = 400mA$
- * Low voltage drive (2.5V)

■ EQUIVALENT CIRCUIT

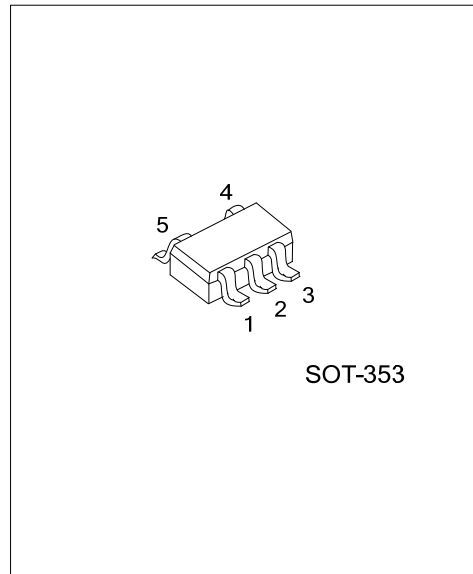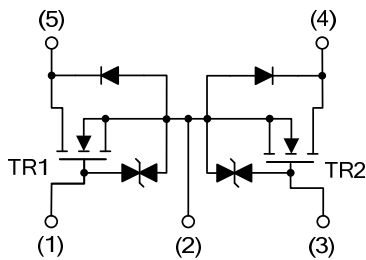


■ ORDERING INFORMATION

| Order Number | Package | Pin Assignment | | | | | Packing |
|-----------------|---------|----------------|------|----|----|----|-----------|
| | | 1 | 2 | 3 | 4 | 5 | |
| UK3018BWG-AL5-R | SOT-353 | G1 | S1S2 | G2 | D2 | D1 | Tape Reel |

| | |
|------------------------|--|
| <p>UK3018BWG-AL5-R</p> | <p>(1) R: Tape Reel</p> <p>(2) AL5: SOT-353</p> <p>(3) G: Halogen Free and Lead Free</p> |
|------------------------|--|

■ MARKING



■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|----------------------------|-----------------|-----------|------------|--------------------|
| Drain-Source Voltage | | V_{DSS} | 30 | V |
| Gate-Source Voltage | | V_{GSS} | ± 20 | V |
| Drain Current | Continuous | I_D | 100 | mA |
| | Pulsed (Note 2) | I_{DP} | 400 | mA |
| Power Dissipation (Note 3) | | P_D | 200 | mW |
| Junction Temperature | | T_J | +150 | $^{\circ}\text{C}$ |
| Storage Temperature | | T_{STG} | -55 ~ +150 | $^{\circ}\text{C}$ |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. $P_w \leq 10\mu\text{s}$, Duty cycle $\leq 1\%$

3. With each pin mounted on the recommended lands.


■ THERMAL RESISTANCE

| PARAMETER | SYMBOL | RATINGS | UNIT |
|---------------------|---------------|---------|-----------------------------|
| Junction to Ambient | θ_{JA} | 625 | $^{\circ}\text{C}/\text{W}$ |


■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--------------|---|-----|-----|---------|---------------|
| OFF CHARACTERISTICS | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0\text{V}$, $I_D=10\mu\text{A}$ | 30 | | | V |
| Drain-Source Leakage Current | I_{DSS} | $V_{DS}=30\text{V}$, $V_{GS}=0\text{V}$ | | | 1 | μA |
| Gate-Source Leakage Current | I_{GSS} | $V_{DS}=0\text{V}$, $V_{GS}=\pm 20\text{V}$, | | | ± 1 | μA |
| ON CHARACTERISTICS | | | | | | |
| Gate Threshold Voltage | $V_{GS(TH)}$ | $V_{DS}=3\text{V}$, $I_D=100\mu\text{A}$ | 0.8 | | 1.5 | V |
| Static drain-source on-state resistance | $R_{DS(ON)}$ | $V_{GS}=4\text{V}$, $I_D=10\text{mA}$, | | 5 | 8 | Ω |
| | | $V_{GS}=2.5\text{V}$, $I_D=1\text{mA}$, | | 7 | 13 | Ω |
| DYNAMIC PARAMETERS | | | | | | |
| Input capacitance | C_{ISS} | $V_{DS} = 5\text{V}$, $V_{GS} = 0\text{V}$, $f = 1\text{MHz}$ | | 13 | | pF |
| Output capacitance | C_{OSS} | | | 9 | | pF |
| Reverse transfer capacitance | C_{RSS} | | | 4 | | pF |
| SWITCHING PARAMETERS | | | | | | |
| Turn-ON Delay Time | $t_{D(ON)}$ | $V_{GS} = 5\text{V}$, $V_{DD} \approx 5\text{V}$ $I_D = 10\text{mA}$, $R_L = 500\Omega$, $R_G = 10\Omega$ | | 15 | | ns |
| Turn-ON Rise Time | t_R | | | 35 | | ns |
| Turn-OFF Delay Time | $t_{D(OFF)}$ | | | 80 | | ns |
| Turn-OFF Fall-Time | t_F | | | 80 | | ns |

■ TEST CIRCUITS AND WAVEFORMS

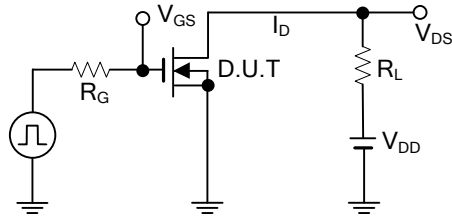

Switching Time Measurement Circuit

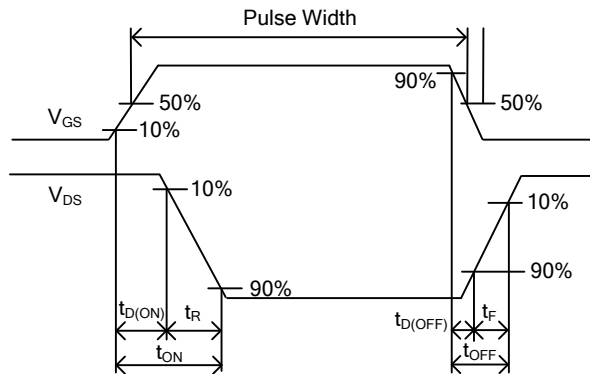

Switching Time Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.