

PQ070XZ1HZ

Low Voltage Operation Low Power-loss Voltage Regulator

Features


- Low voltage operation (Minimum operating voltage: 2.35V)
- Low dissipation current
Dissipation current at no load: MAX.2mA
Output OFF-state dissipation current: MAX.5μA
- Low power-loss (Dropout voltage: MAX.0.5V)
- Built-in overcurrent and overheat protection functions

Applications

- Power supplies for personal computers and peripheral equipment
- Power supplies for various electronic equipment such as DVD player or STB

Outline Dimensions

(Unit : mm)

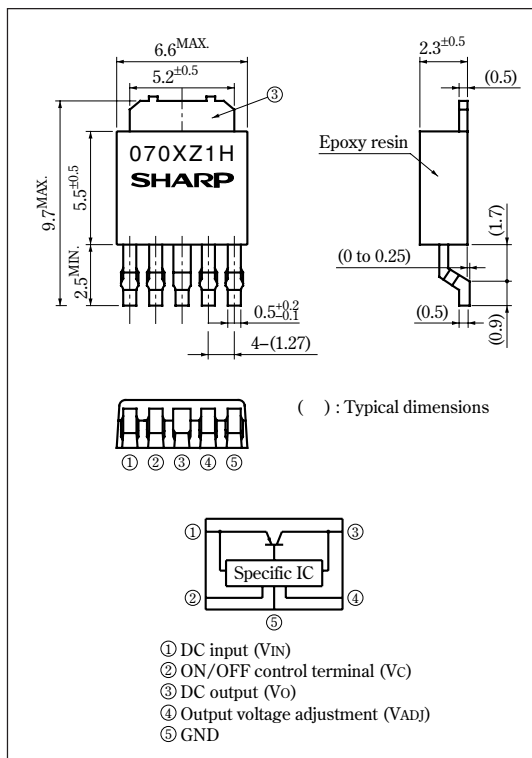

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V _{IN}	10	V
*1 ON/OFF control terminal voltage	V _C	10	V
*1 Output adjustment terminal voltage	V _{ADJ}	5	V
Output current	I _O	1.5	A
*2 Power dissipation	P _D	8	W
*3 Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-40 to +85	°C
Storage temperature	T _{stg}	-40 to +150	°C
Soldering temperature	T _{sol}	260 (10s)	°C

*1 All are open except GND and applicable terminals

*2 P_D: With infinite heat sink

*3 Overheat protection may operate at T_j=125°C to 150°C

• Please refer to the chapter " Handling Precautions ".

SHARP

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=5V$, $V_O=3V$ ($R_1=1k\Omega$), $I_O=0.5A$, $V_C=2.7V$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	—	2.35	—	10	V
Output voltage	V_O	—	1.5	—	7	V
Load regulation	R_{eL}	$I_O=5mA$ to $1.5A$	—	0.2	2	%
Line regulation	R_{eI}	$V_{IN}=4$ to $8V$, $I_O=5mA$	—	0.2	1	%
Ripple rejection	RR	Refer to Fig.2	45	60	—	dB
Dropout voltage	V_{I-O}	$V_{IN}=3.3V$, $I_O=1.25A$	—	—	1	V
Reference voltage	V_{ref}	—	1.225	1.25	1.275	V
Temperature coefficient of reference voltage	$T_C V_{ref}$	$T_J=0$ to $125^\circ C$, $I_O=5mA$	—	± 1.0	—	%
*4 ON-state voltage for control	$V_C(ON)$	*4	2	—	—	V
ON-state current for control	$I_C(ON)$	—	—	—	200	μA
OFF-state voltage for control	$V_C(OFF)$	$I_O=0A$	—	—	0.8	V
OFF-state current for control	$I_C(OFF)$	$I_O=0A$, $V_C=0.4V$	—	—	2	μA
Quiescent current	I_q	$I_O=0A$	—	1	2	mA
Output OFF-state dissipation current	I_{qs}	$V_C=0.4V$	—	—	5	μA

*4 In case of opening control terminal ②, output voltage turns off.

Fig.1 Test Circuit

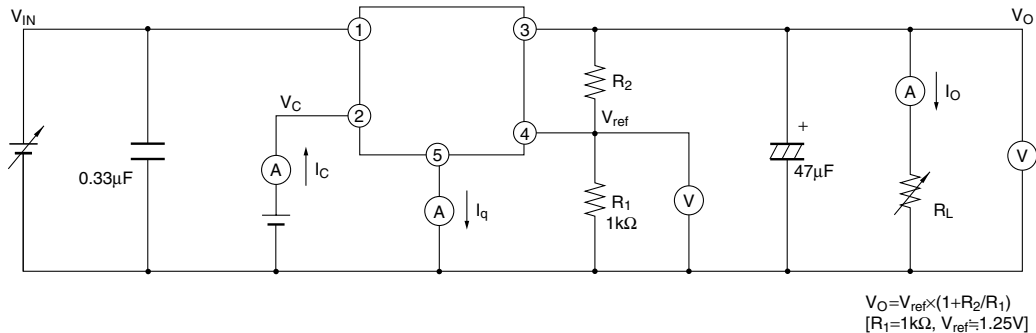


Fig.2 Test Circuit for Ripple Rejection


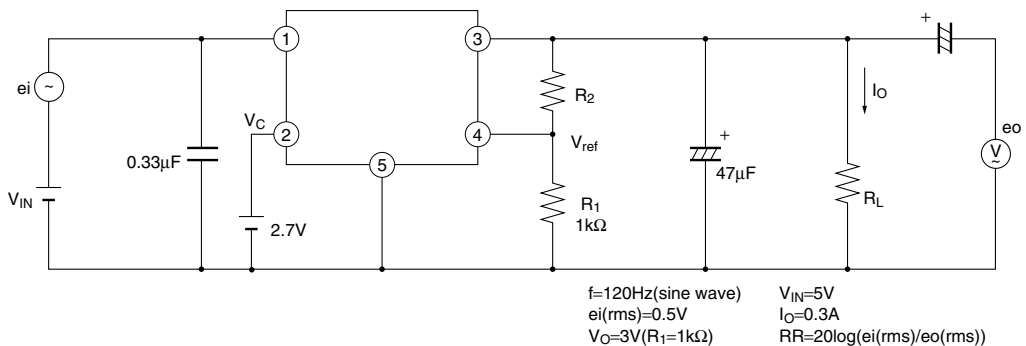


Fig.3 Power Dissipation vs. Ambient Temperature

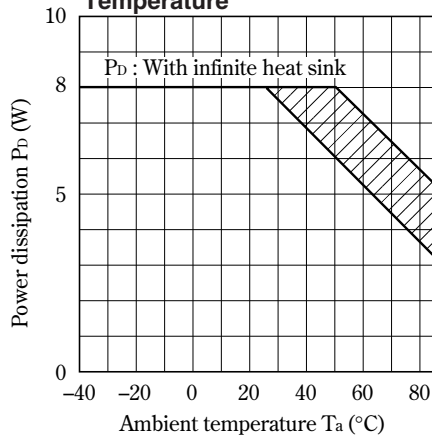

Note) Oblique line portion: Overheat protection may operate in this area.

Fig.5 Reference Voltage vs. Junction Temperature

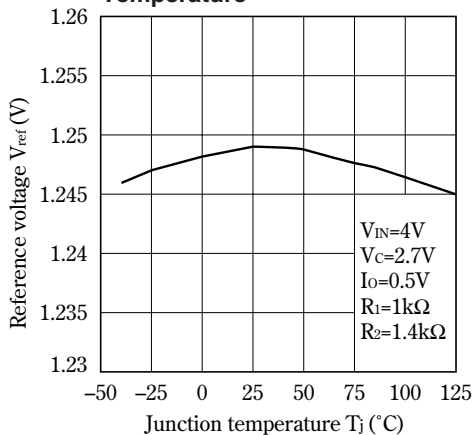


Fig.7 Circuit Operating Current vs. Input Voltage

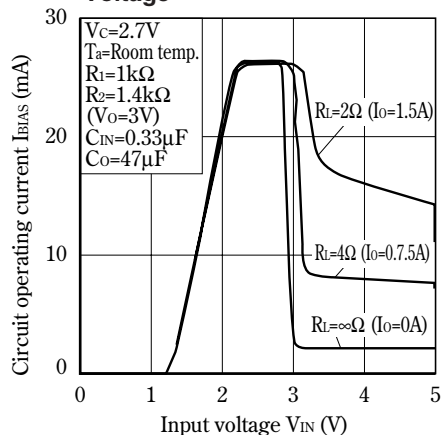


Fig.4 Overcurrent Protection Characteristics

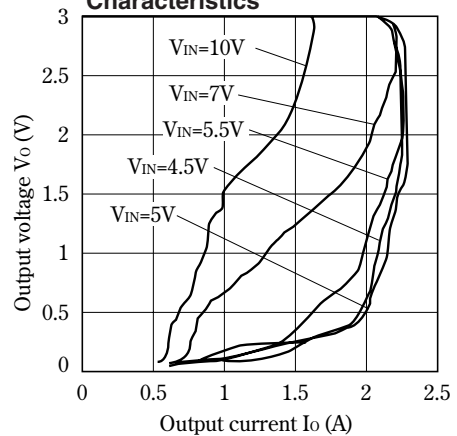


Fig.6 Output Voltage vs. Input Voltage

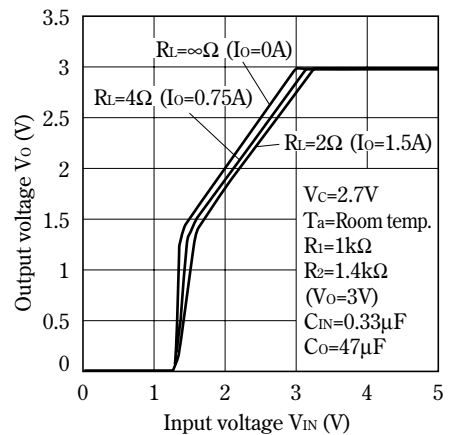


Fig.8 Dropout Voltage vs. Junction Temperature







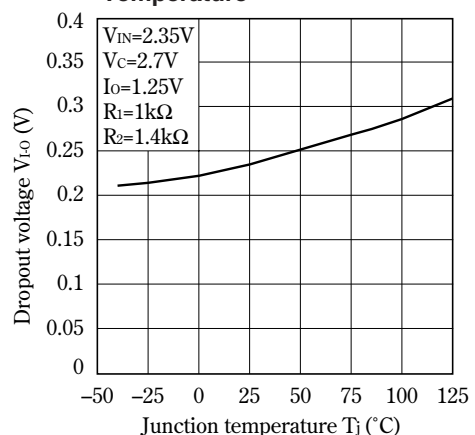



Fig.9 Quiescent Current vs. Junction Temperature**Fig.10 Ripple Rejection vs. Input Ripple Frequency****Fig.11 Ripple Rejection vs. Output Current****Fig.12 Power Dissipation vs. Ambient Temperature (Typical Value)**

Material : Glass-cloth epoxy resin
 Size : $50 \times 50 \times 1.6\text{mm}$
 Cu thickness : $35\mu\text{m}$

Fig.13 Output Voltage Adjustment Characteristics (Typical Value)

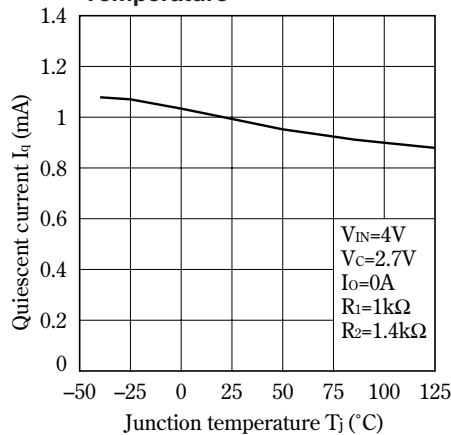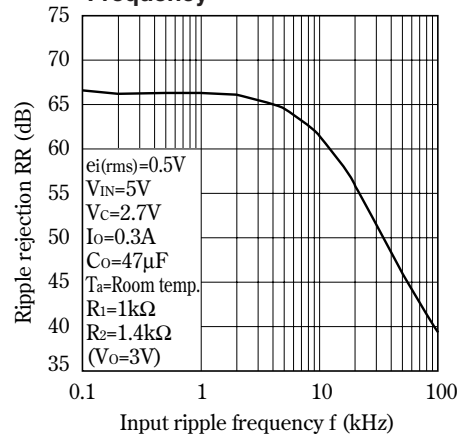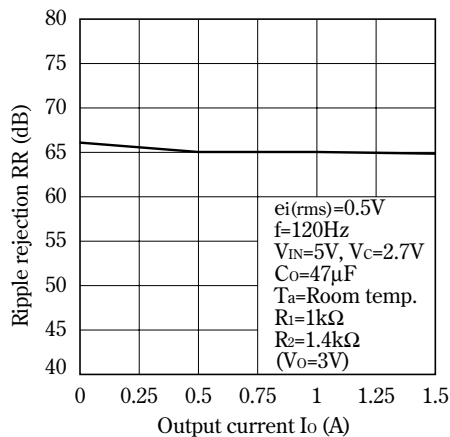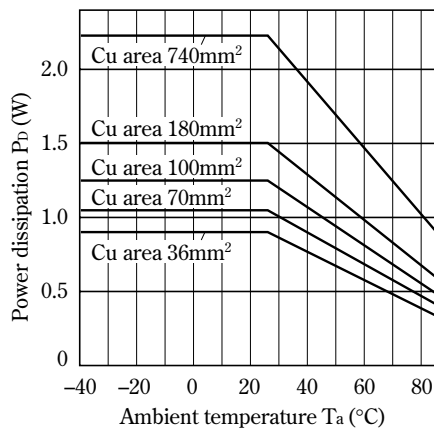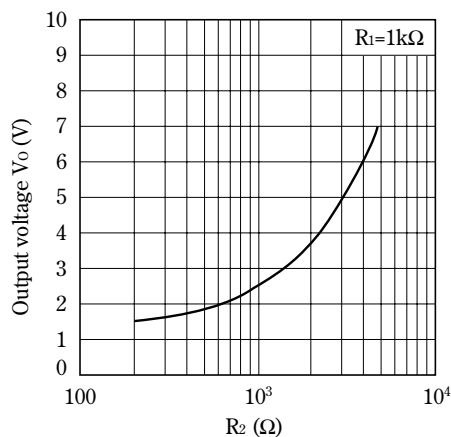


Typical Application

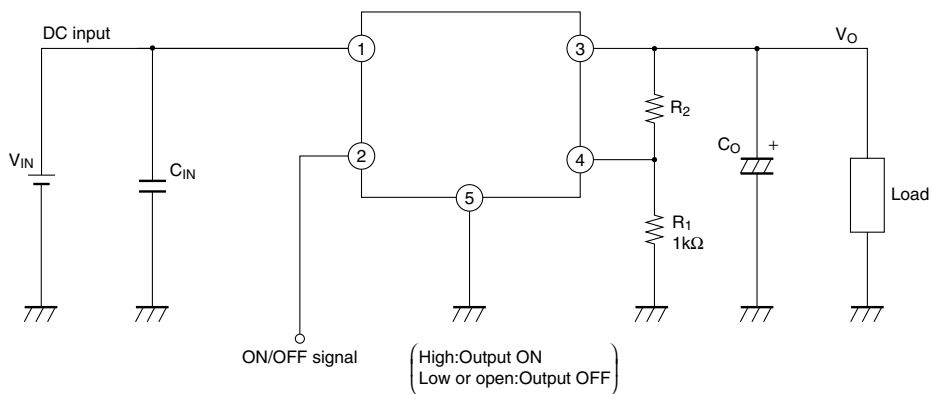

Setting of Output Voltage

Output voltage is able to set from 1.5V to 7V when resistors R_1 and R_2 are attached to ③, ④, ⑤ terminals. As for the external resistors to set output voltage, refer to the figure below and Fig.13.

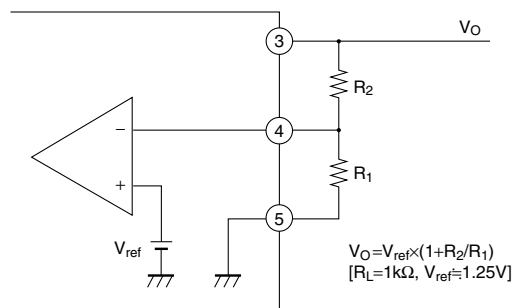

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.