

STRAIGHT MALE RECEPTACLE PIN IN PASTE


LIMITED DETENT-TAPE AND REEL BY 500


R222.940.300

Series : **SMP-COM**

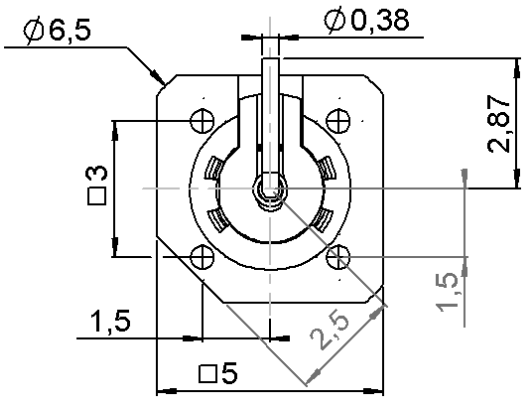


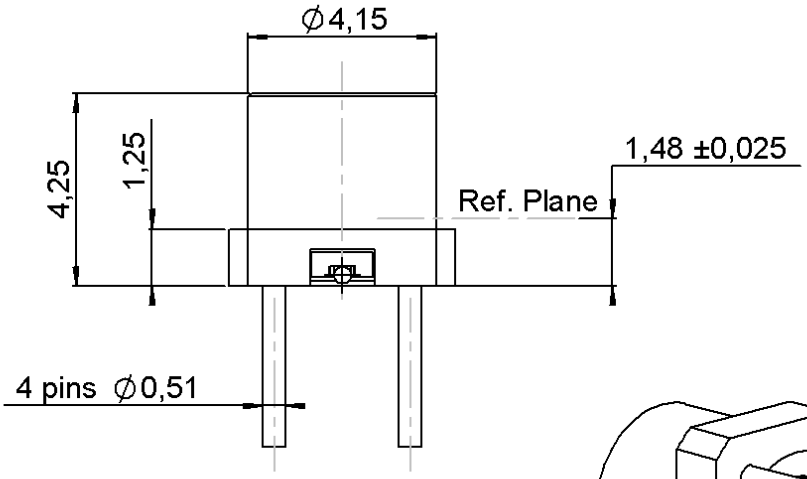



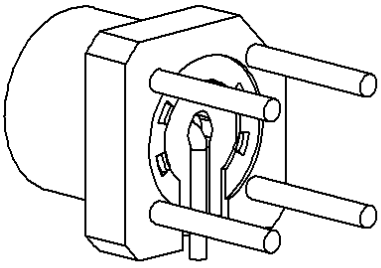

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	**BRASS**	**NPGR**
CENTER CONTACT	**BRASS**	**NPGR**
OUTER CONTACT	-	-
INSULATOR	**PEEK**	
GASKET	-	
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 1121 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

STRAIGHT MALE RECEPTACLE PIN IN PASTE
LIMITED DETENT-TAPE AND REEL BY 500

R222.940.300
Series : **SMP-COM**

PACKAGING

Standard	Unit	Other
500		**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-12.4***	GHz
VSWR	**1.1**** +	**0,0000**	x F(GHz) Maxi
Insertion loss		**0.12**	√F(GHz) dB Maxi
RF leakage	- (	**NA**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**500**	Veff mini
Insulation resistance		**5000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-55/+125**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHER CHARACTERISTICS

Assembly instruction **NA**

Others :
* ROS 1.35 at 12.4Ghz
**ROS at 6GHz

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**6.8**	N mini
Axial force – Opposite end	**6.8**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**100**	Cycles mini
Weight	**0,3610**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

STRAIGHT MALE RECEPTACLE PIN IN PASTE

LIMITED DETENT-TAPE AND REEL BY 500

R222.940.300

Series : **SMP-COM**

SOLDER PROCEDURE

1. **Deposit solder paste 'SnAg4Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux.**
   We advise a thickness of 150 micromm (5.850 microinch). Verify that the edges of the zone are clean.


2. **Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type. A video camera is recommended for positioning of the component . Adhesive agents must not be used on the receptacle.**

3. **This process of soldering has been tested with convection oven .Below please find ,the typical profile to use.**

4. **The cleaning of printed circuit boards is not obliged .**

5. **Verification of solder joints and position of the component by visual inspection.**

TEMPERATURE PROFILE

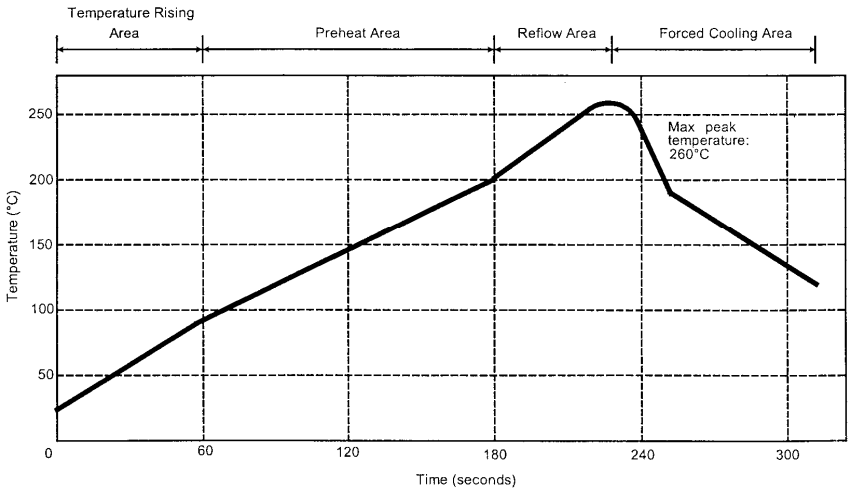

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®


STRAIGHT MALE RECEPTACLE PIN IN PASTE

LIMITED DETENT-TAPE AND REEL BY 500

R222.940.300

Series : **SMP-COM**


STANDARD PAD(For ROGERS 4350)

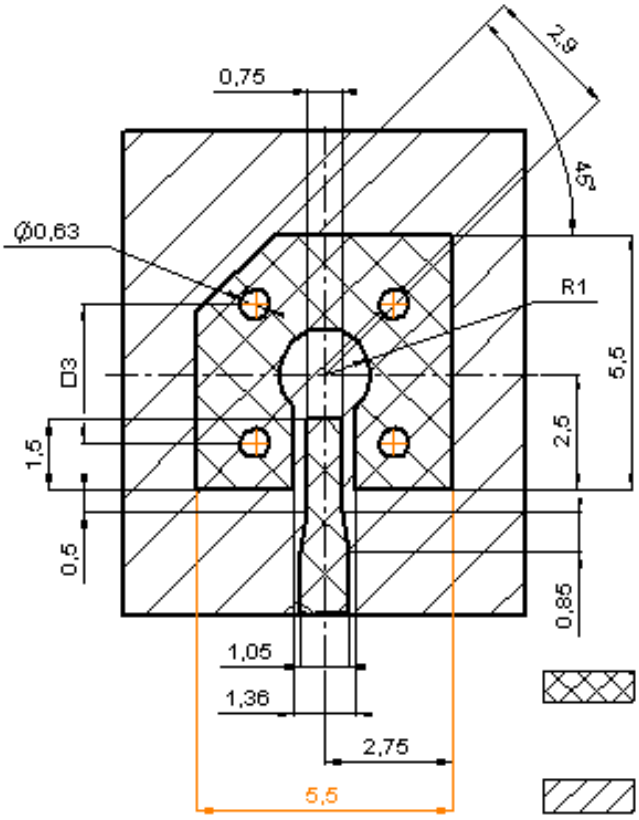

COPLANAR LINE

Pattern and signal are on the same side.
Thickness of PCB : 1.6mm
The material of PCB is the epoxy resin of glass fabrics bacs (ER:4.8).
The solder resist should be printed exept for the land pattern on the PCB.

SHADOW OF RECEPTACLE FOR VIDEO CAMERA

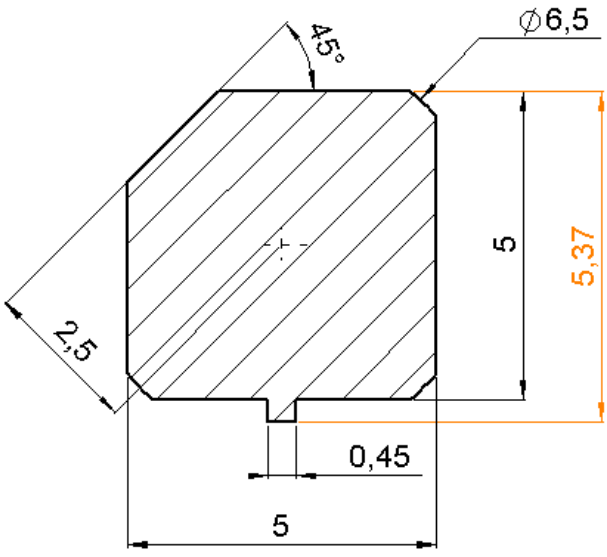

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RADIALL®


STRAIGHT MALE RECEPTACLE PIN IN PASTE

LIMITED DETENT-TAPE AND REEL BY 500


R222.940.300

Series : **SMP-COM**

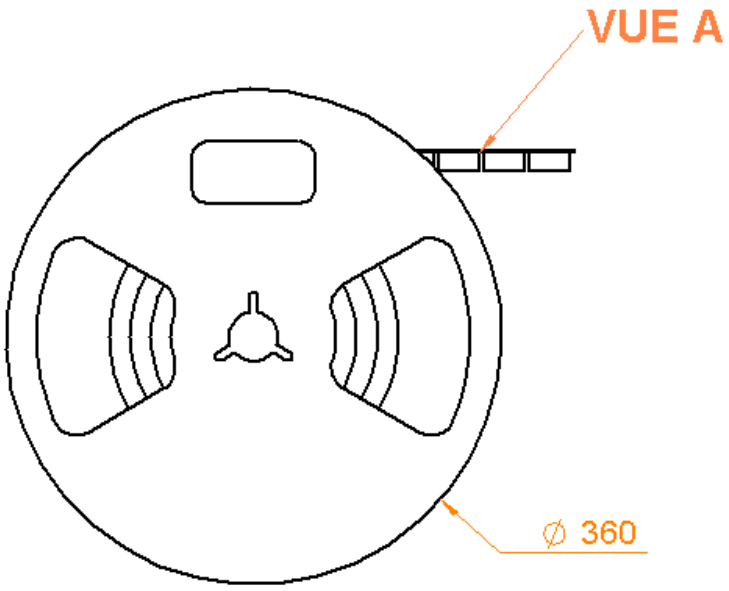

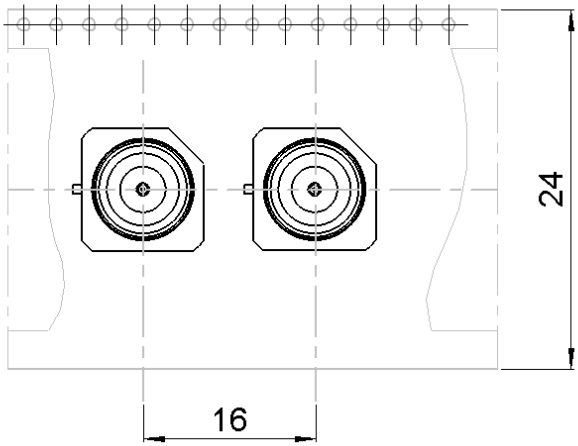

AIR SUNCTION

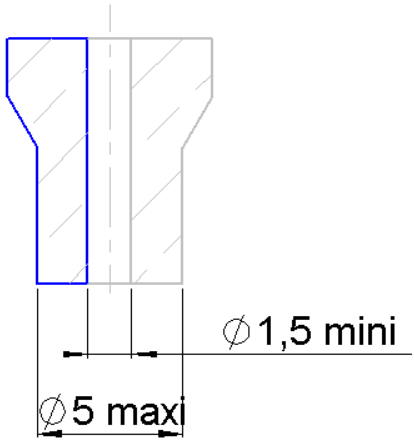

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®