



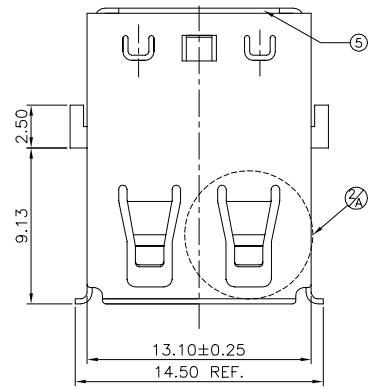


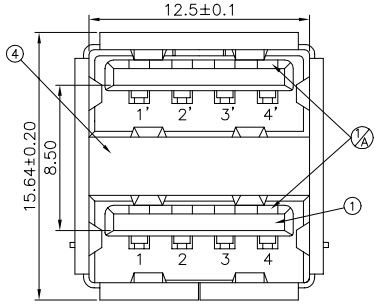

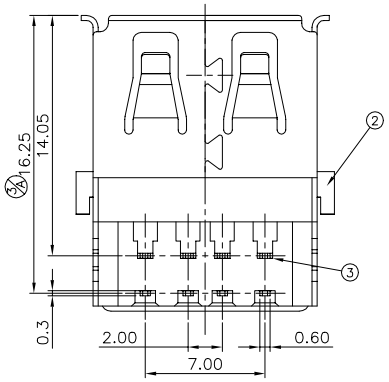

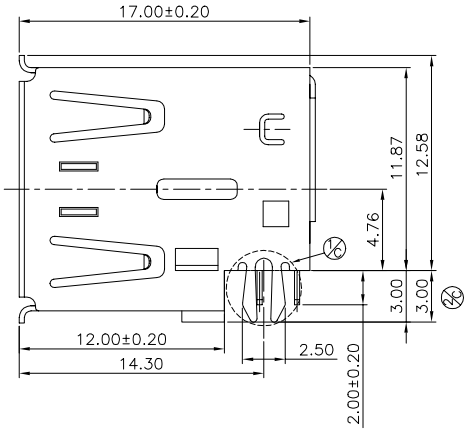

Recommended P.C.B Layout

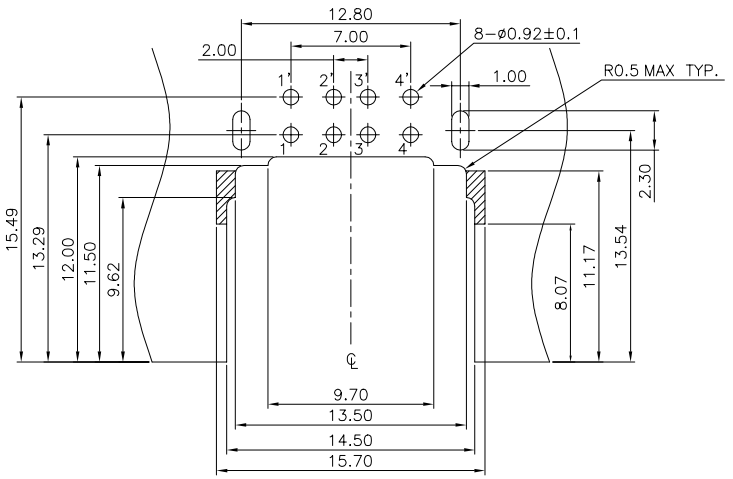

NOTE(I):
020122MR008□□ 13ZA
1

1. Selective plating
'S1,-05u" Min. gold in contact area/ 100u" Min. Tin in solder area.
'S3,-10u" Min. gold in contact area/ 100u" Min. Tin in solder area.
'S4,-15u" Min. gold in contact area/ 100u" Min. Tin in solder area.
'S5,-30u" Min. gold in contact area/ 100u" Min. Tin in solder area.
'S6,-50u" Min. gold in contact area/ 100u" Min. Tin in solder area.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
5	Top Shell	Stainless Steel	——	NI
4	Middle Shell	Stainless Steel	——	NI
3	Terminal	Phos.Bronze	——	GLOD/TIN
2	Shell	Stainless Steel	——	NI
1	Plastic	LCP	BLACK	UL90V-0

ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	C		C1:修改叉片結構;C2:叉片高度3.50->3.00		
	B		B1: DEI 2522AY-08G2T-M	馬克鋒	陳清照
EC1T-021114-07	A	02/11/14	A1:增加偷料孔;A2:修改鐵殼彈片;A3:16.25±0.10->16.25	宋勃逸	宋權哲
	0	01/06/22	NEW	——	

Angle	±2°
30 ~	±0.50
10 ~ 30	±0.30
~ 10	±0.15

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

DRAW	李儒平	01/06/22
DESIGN	李儒平	01/06/22
CHECK	張志瑋	01/06/22
APPRO.	張志瑋	01/06/22

SUYIN CONNECTOR

CUSTOMER COPY

TITLE: USB Series A Type Dual Port Dip Type

PART NO.	020122MR008SX13ZA
PART NO. (OLD)	2522AY-08GXT-M
DRAWING NO. D ING	020122MR008SX13ZA
SCALE 4:1	UNIT mm A4

001108-91