


**Notes:**

**Material and finish:**  
 Contact: Brass  
 Gold over 30~80u" nickel plating  
 Insulation: PA9T UL94-V0, color black

**Specifications:**  
 Current rating: 3.0A  
 Contact resistance: 20mΩ Max.  
 Withstanding Voltage: 1000V AC/DC  
 Insulation resistance: 1000MΩ Min.  
 Operating temperature: -40°C to +105°C

PE Bag Packaging Q'ty	
20	300
18	300
16	500
14	500
12	500
10	1000
8	1000
6	1000
4	1000
No. of positions	Q'ty per tube

Tube Packaging Q'ty	
20	22
18	25
16	28
14	33
12	38
10	46
8	57
6	77
4	114
No. of positions	Q'ty per tube

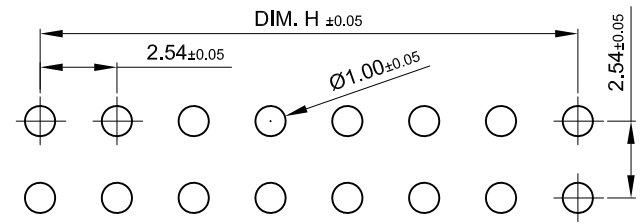

**PCB Layout**

129536	129527	129518	129509	129500	129491	20	25.40	22.86	44	10.00
129535	129526	129517	129508	129499	129490	18	22.86	20.32	44	10.00
129534	129525	129516	129507	129498	129489	16	20.32	17.78	44	10.00
129533	129524	129515	129506	129497	129488	14	17.78	15.24	44	10.00
129532	129523	129514	129505	129496	129487	12	15.24	12.70	32	10.00
129531	129522	129513	129504	129495	129486	10	12.70	10.16	32	10.00
129530	129521	129512	129503	129494	129485	8	10.16	7.62	24	7.00
129529	129520	129511	129502	129493	129484	6	7.62	5.08	24	7.00
129528	129519	129510	129501	129492	129483	4	5.08	2.54	24	7.00
Id-Nr. PE Bag 10u" gold plating	Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. PE Bag 0.8u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. N	DIM. P

Information:	Tolerances X ±0.50 X' ±10° X.X ±0.40 X.X' ±5° X.XX ±0.25 X.XX' ±3°	All Dimensions in mm	Scale 4:1 For further information about I. D. number see manufacturing document
All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using	Subject to modification without prior notice. Drawing will not be updated.	Designation 2.54mm Vertical Dual Row Header THR	
ERNI Asia Holding www.erni.com		129482	
A	13-08-2013		
Rev.	Date	129482.DWG	