

# Surface Mount Directional Coupler

## JDC-10-2+ JDC-10-2

50Ω 5 to 750 MHz




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

### Outline Drawing

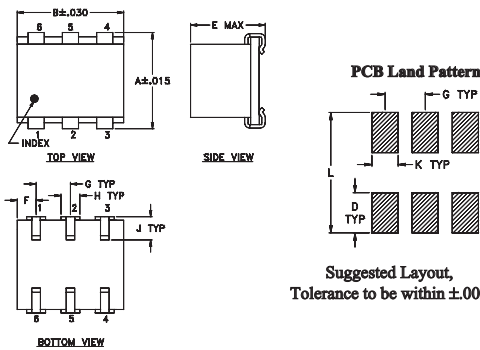


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

### Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

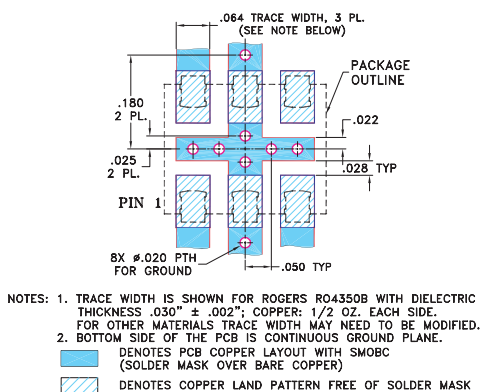

### Features

- wideband, 5 to 750 MHz
- low mainline loss, 1.0 dB typ.
- high directivity, 20 dB typ.
- good VSWR, 1.13 typ.
- excellent solderability

### Applications

- communications
- VHF/UHF

CASE STYLE: BH292  
PRICE: \$13.60 ea. QTY (25-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W			
	Nom.	Flatness	L		M		U		L		M		U			Typ.	Max.	Max.	
f <sub>L</sub> -f <sub>U</sub>			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
5-750	10.0±0.5	±0.6	1.0	1.5	1.0	1.5	1.0	1.5	20	15	20	17	20	16	1.13	1.0	1.0		


L = 5-50 MHz M = 50-375 MHz U = 375-750 MHz  
1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)		Return Loss (dB)	
			In	Out	Out	Cpl
5.00	0.85	9.64	20.74	22.23	32.79	21.36
23.00	0.85	9.66	21.03	22.49	34.45	21.91
41.00	0.88	9.65	20.93	22.53	34.69	21.90
100.00	0.91	9.69	20.61	22.82	34.29	21.73
200.00	0.93	9.77	20.21	23.77	32.59	21.09
315.00	0.92	9.91	19.55	25.35	30.59	20.08
405.00	0.97	9.98	19.10	26.82	29.48	19.17
555.00	0.99	10.02	18.32	29.22	28.21	17.76
690.00	1.08	10.06	17.53	30.09	27.10	16.66
750.00	1.12	10.01	17.13	29.75	26.46	16.22

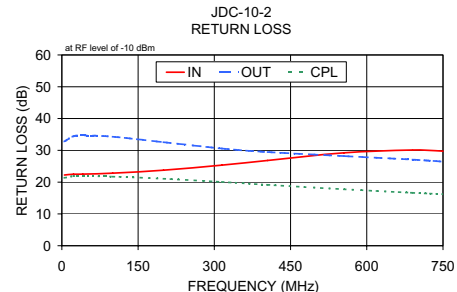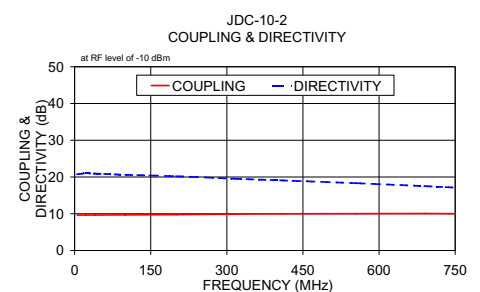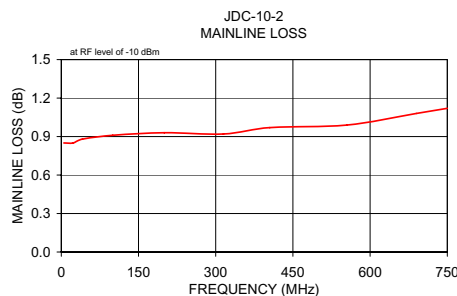

### Electrical Schematic

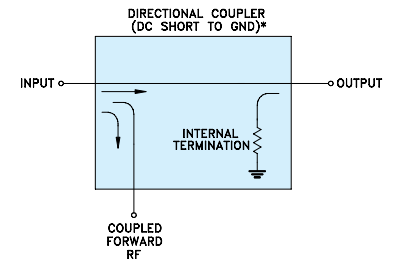

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. D  
M119986  
ED-4936  
JDC-10-2  
WZ/TD/CP/AM  
081111