


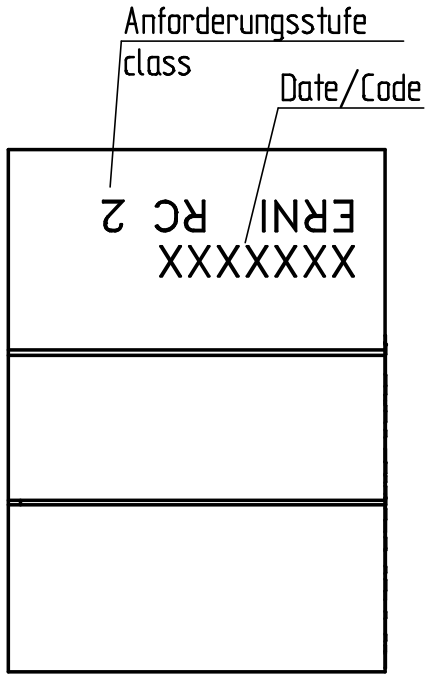


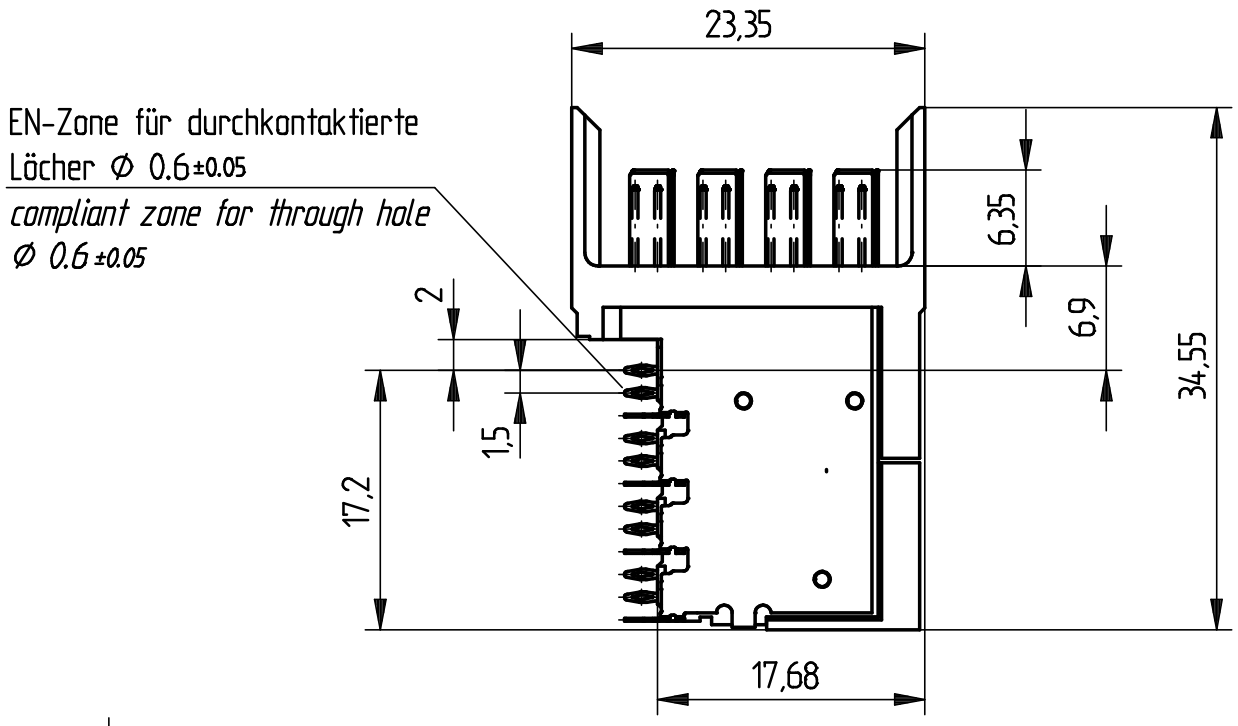


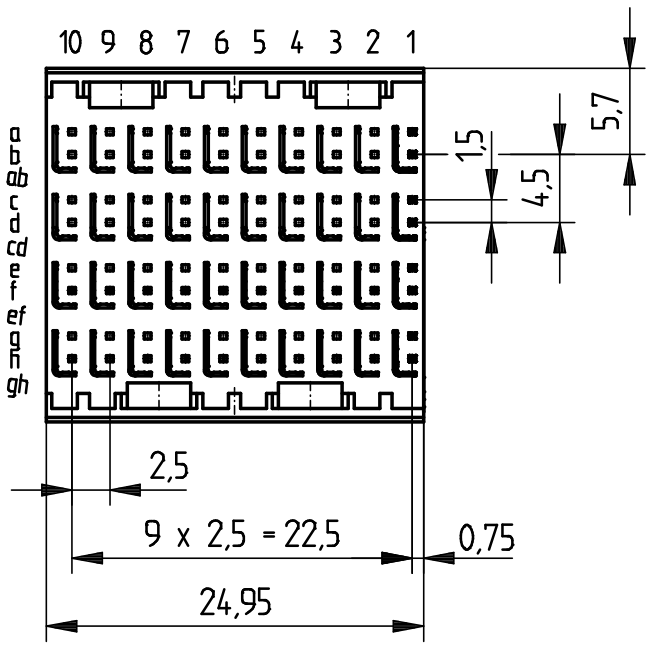


Kontaktversion, Messerkontakt
Contact Option, Male Contact

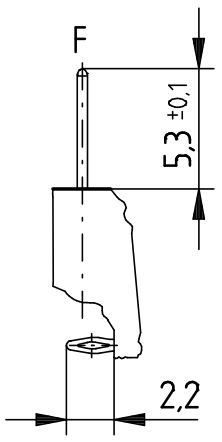


Kontaktversion, Schirmmesser
Contact Option, Shielding Contact



Bestückungsplan - *contact layout*

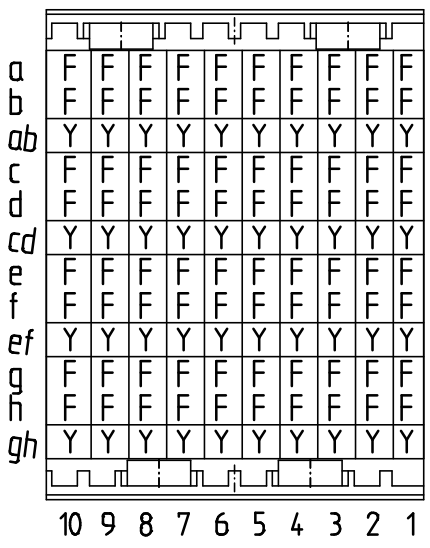

Lochbild für Leiterplatte (Bestückungsseite) *Board hole pattern (Component mounting side)*

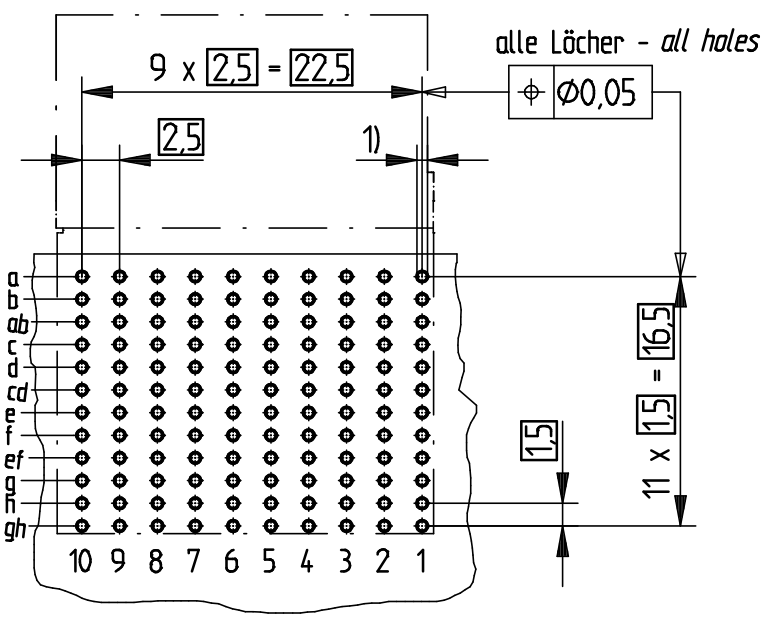

1) Ø0.6 ±0.05 Durchmesser des metallisierten Loches
Ø0.6 ±0.05 Diameter of finished plated-through hole

Ø0.7 ±0.02 Bohrungsdurchmesser des Loches
Ø0.7 ±0.02 Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406

Metal plating of plated-through hole
see drawing 114406

Consider protection memo from DIN 34

Information: F + Y
siehe Bestückungsplan /
see contact layout
Anforderungsstufe 2 /*class 2*

Tolerances

All Dimensions in mm

Scale 2:1

All rights reserved.
Only for information.
To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
ERmetZD Messerleiste abg. 4-10
ERmetZD Male Con. angle 4-10

ERNI www.ERNI.com

100300890001 K

Index		Date
c		06.02.2012

H:00069867.SZA

ERMZD