Power Inductor
CDR25D07/LA



■ Features


◎ Magnetically shielded construction.
◎ Storage temperature range: -40℃~+105℃.
◎ Operating temperature range: -40℃~+105℃
(including coil's self temperature rise).
◎ High operating frequency up to 6MHz.
◎ RoHS Compliance and Halogen Free.

■ Applications


Ideally used in MP3/MP4, smart phone, PDA, DSC/DVC, etc.

■ Dimensions/Recommended Land Patterns (mm)

◆ Dimensions

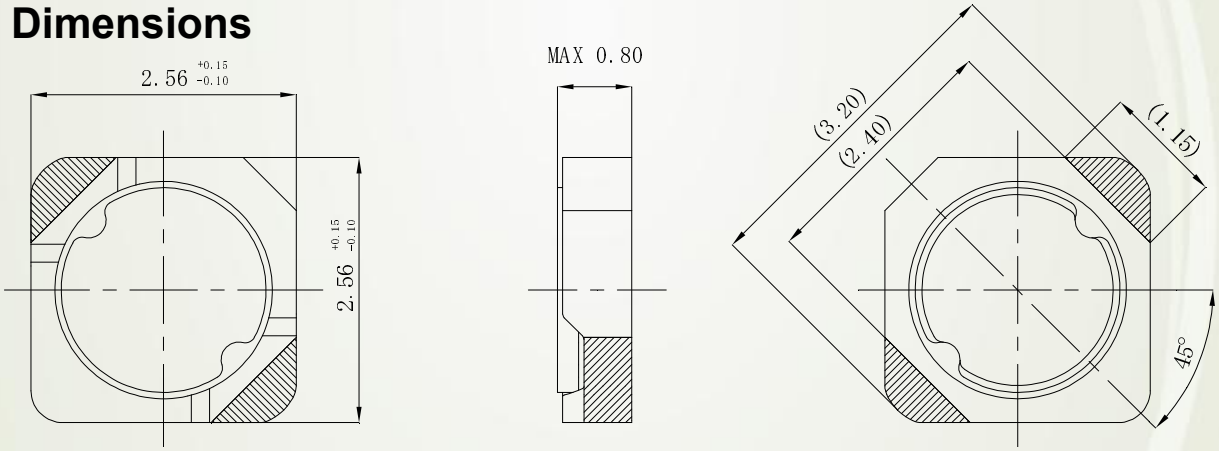

◆ Land pattern

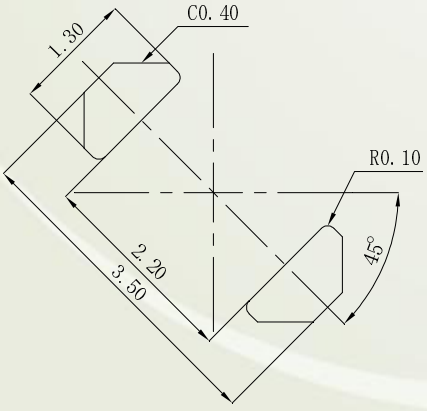

Power Inductor
CDR25D07/LA

■Electrical Characteristics specification.

No.	Part name	Stamp	Inductance (μH) [Within] ※1	D.C.R. (mΩ) [Within] (at 20℃)	The saturation current (A) ※2 (at 20℃)	Temperature rise current (A) ※3 △T=40℃
1	CDR25D07LANP-R68PC	A	0.68±25%	53±25%	0.78	1.58
2	CDR25D07LANP-1R0PC	B	1.0±25%	104±20%	0.64	0.98
3	CDR25D07LANP-1R5PC	C	1.6±25%	136±20%	0.53	0.87
4	CDR25D07LANP-2R2PC	D	2.2±25%	202±20%	0.45	0.66
5	CDR25D07LANP-3R3MC	E	3.3±20%	331±20%	0.37	0.49
6	CDR25D07LANP-4R7MC	F	4.7±20%	391±20%	0.31	0.45

※1 Measuring frequency inductance at 1MHz .

※2 Saturation current: The DC current at which the inductance decreases to 70% of its nominal value.
※3 Temperature rise current: The DC current at which the temperature rise is △t=40℃.(Ta=20℃)

For More Information

Hong Kong
Tel.+852-2880-6688
FAX.+852-2565-9600

Shanghai
Tel.+86-021-5836-3299
FAX.+86-021-5836-3266

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738

Tokyo
Tel.+81-3-5202-7112
FAX.+81-3-5202-7105

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778

Singapore
Tel.+65-6296-3388
FAX.+65-6296-3390

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720

Obernzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310