



used for: D-SUB COMBINATION

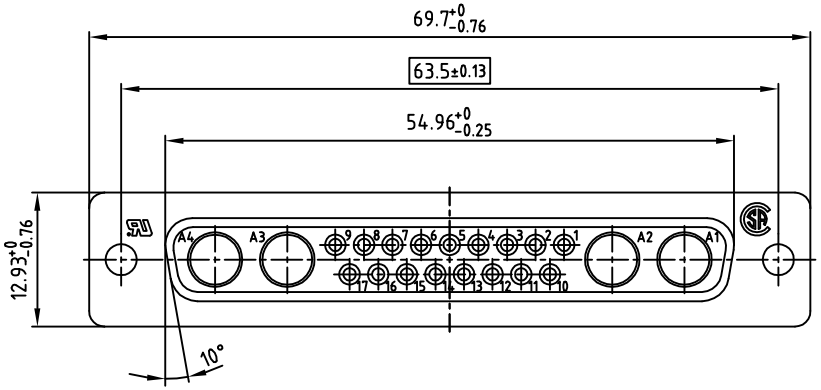

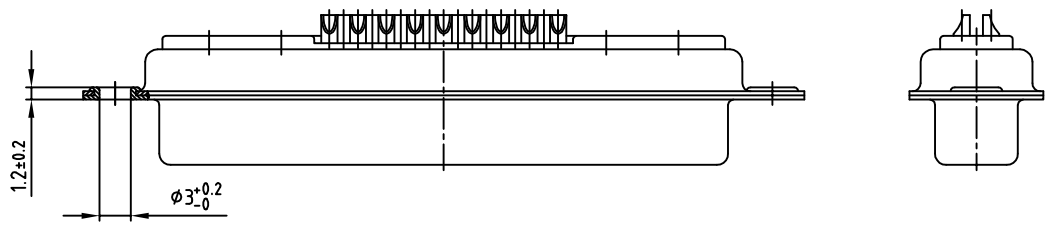

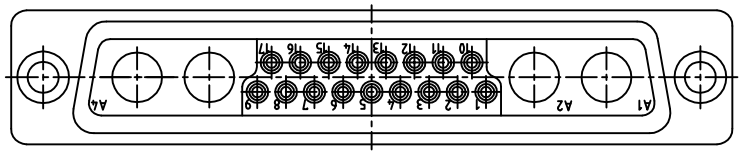

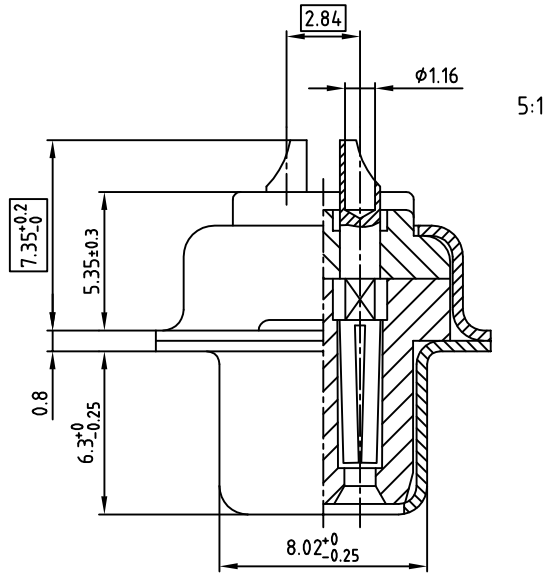

NOTES:
1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. ☐ = CRITICAL DIMENSION: SPC

Directive 2002/95/EC „RoHS" Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

	date	name
2000		
drawn	12.01.	Barcinski
appd.	12.01.	Mickenbecker
norm		
d-old		

scale: 2.1 (5:1)
material: SEE NOTES

title:
D-SUB COMBINATION FEMALE
SOLDER CUP 21WA4S

dwg no: 13K21W7A
CAD/ REL.14
DIN-A 3
sh: 1/1

product no: 321WA4SCM99A10X