
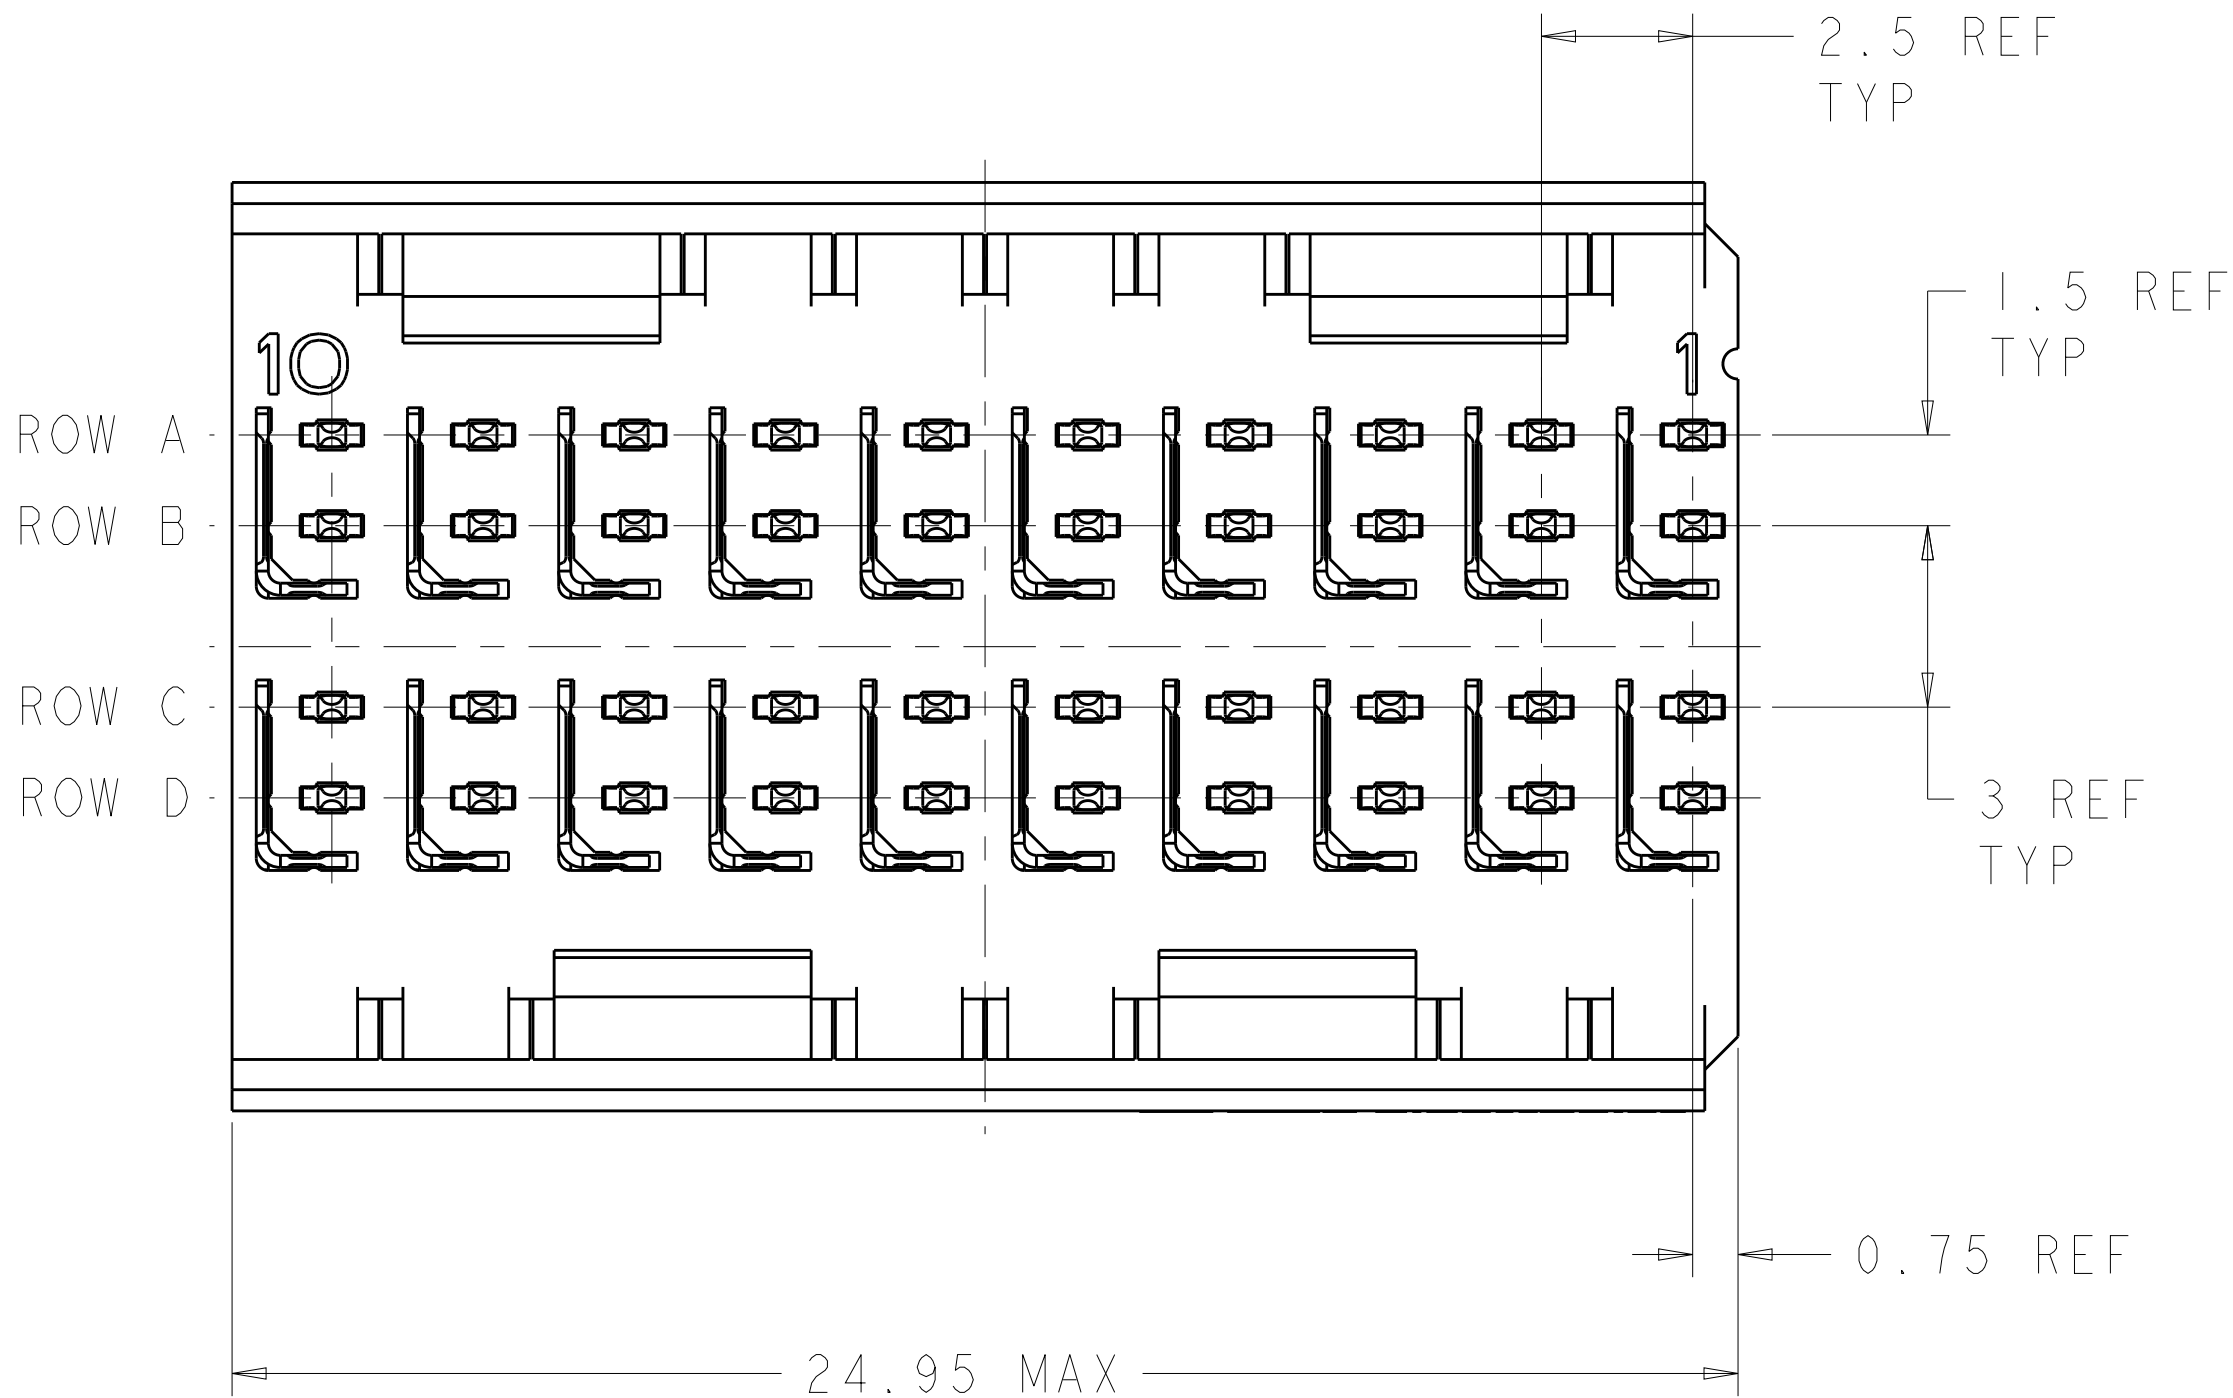
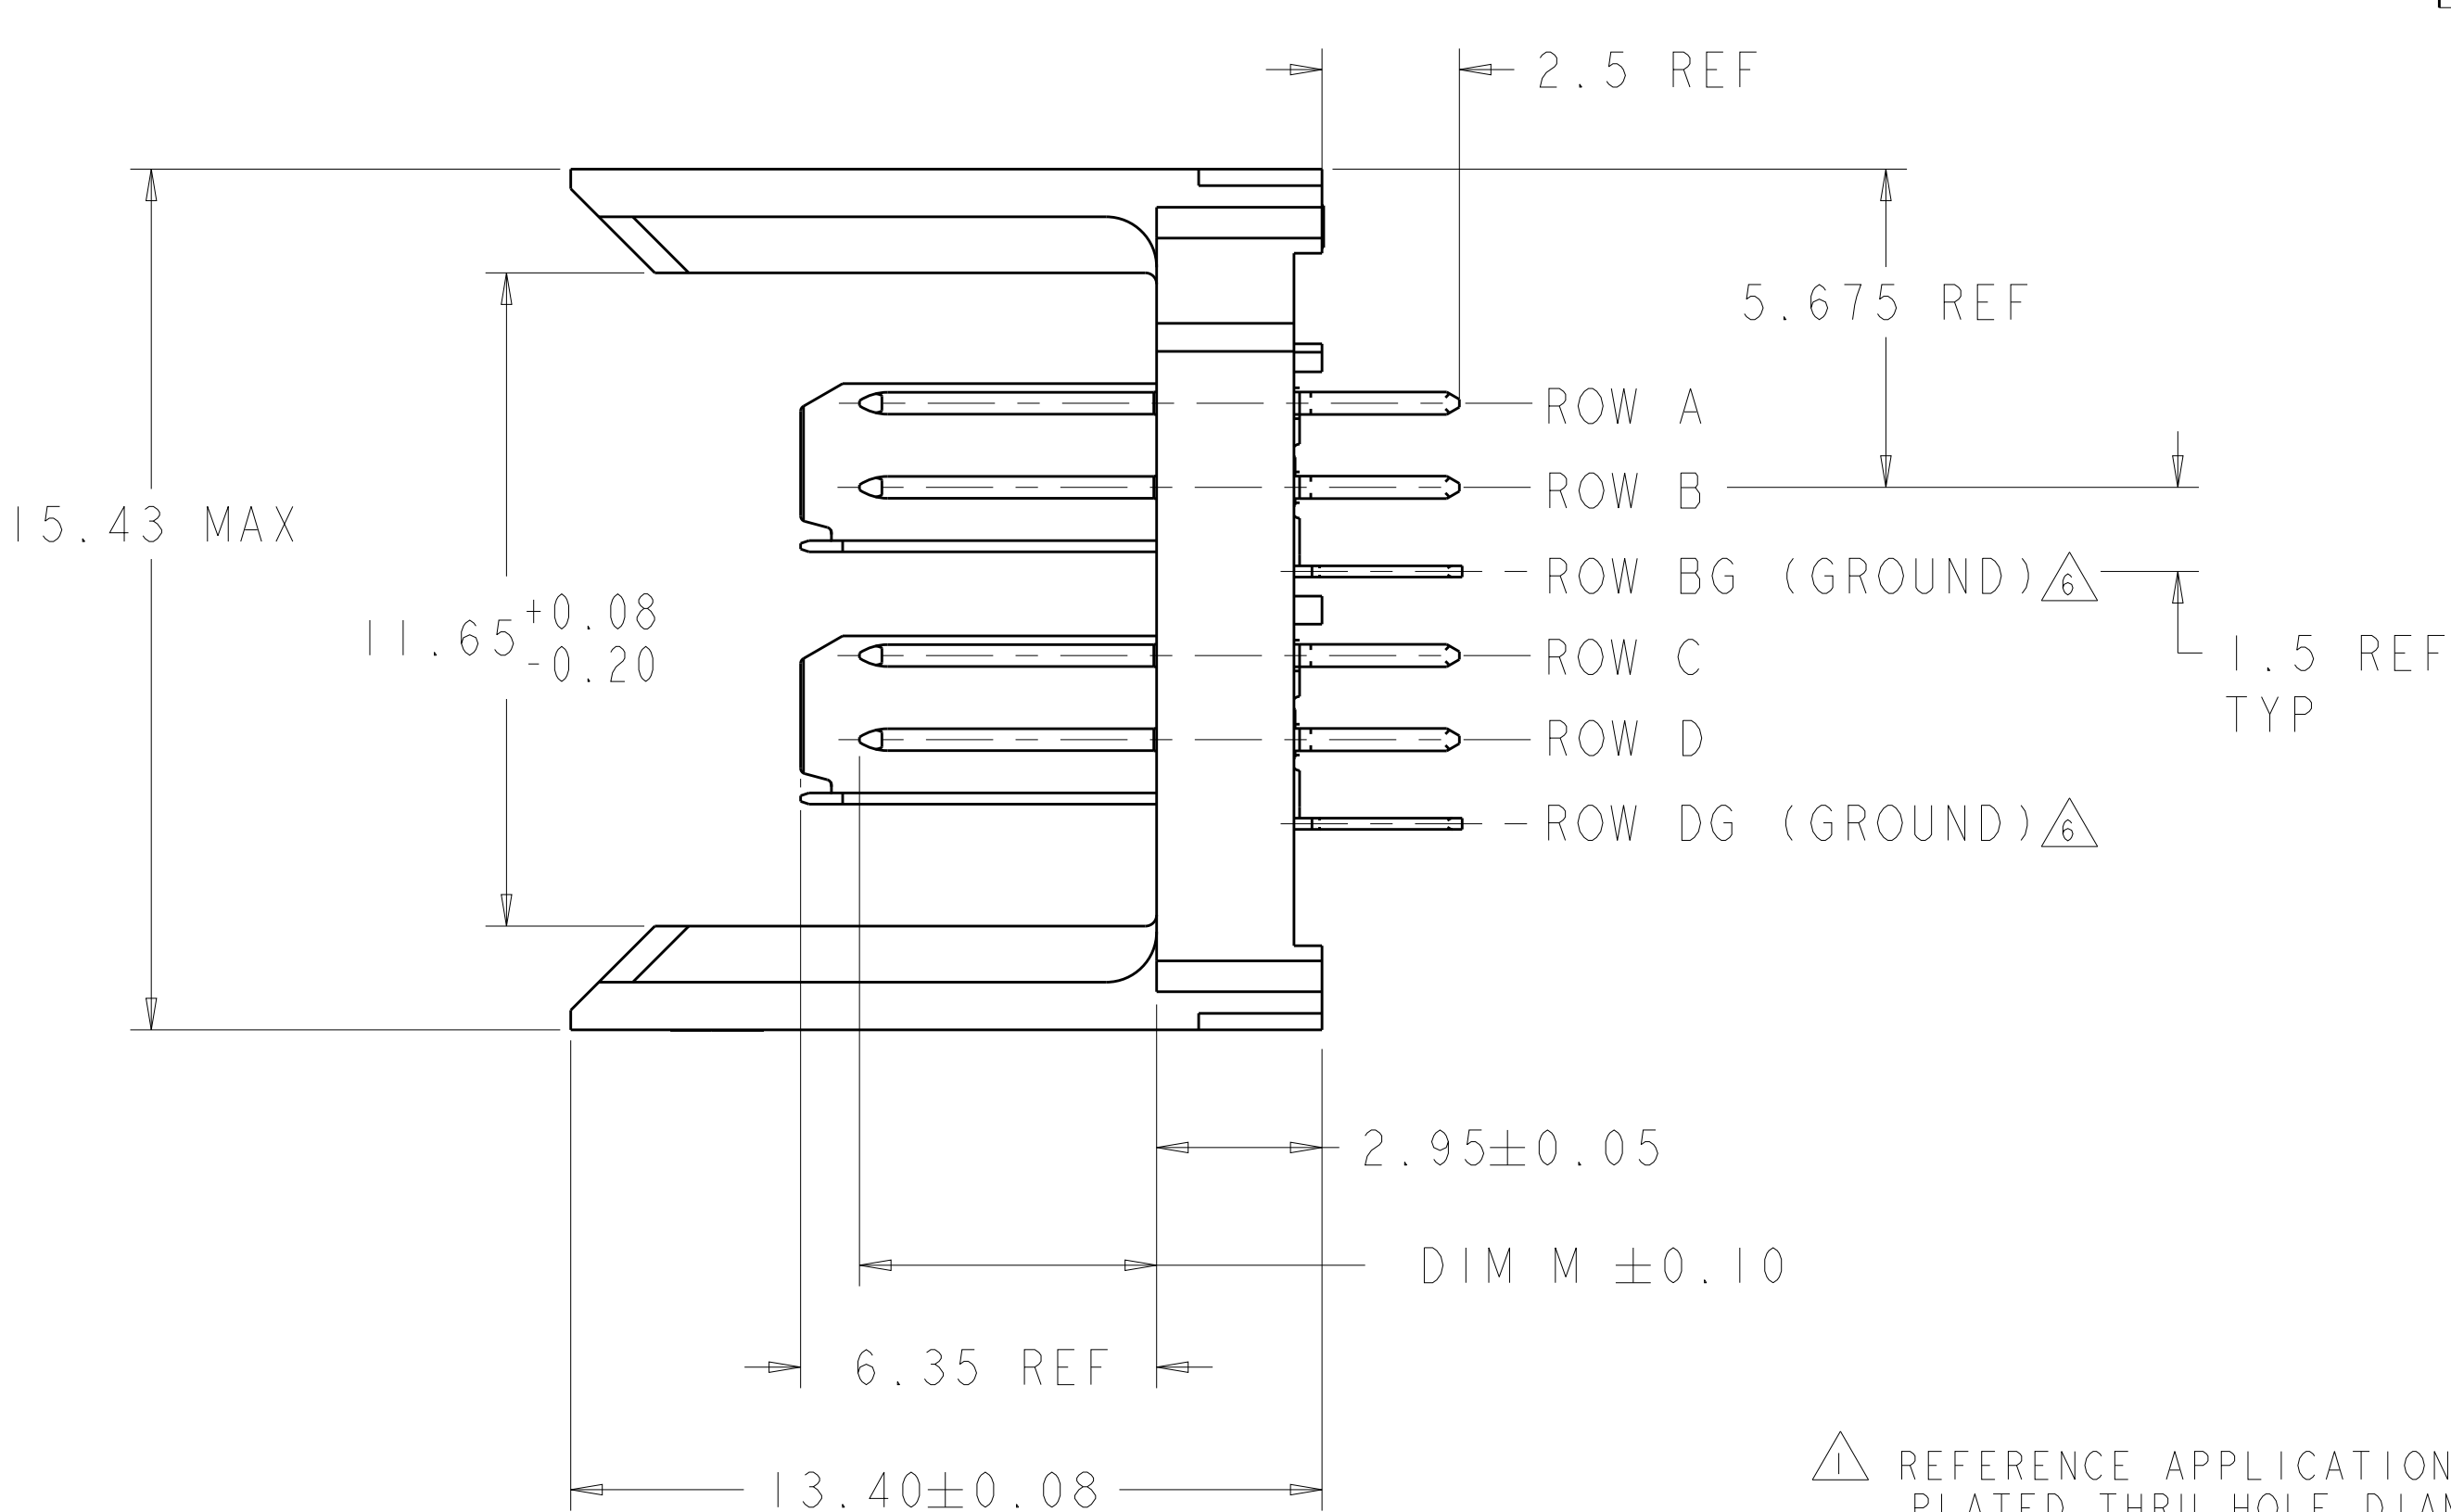
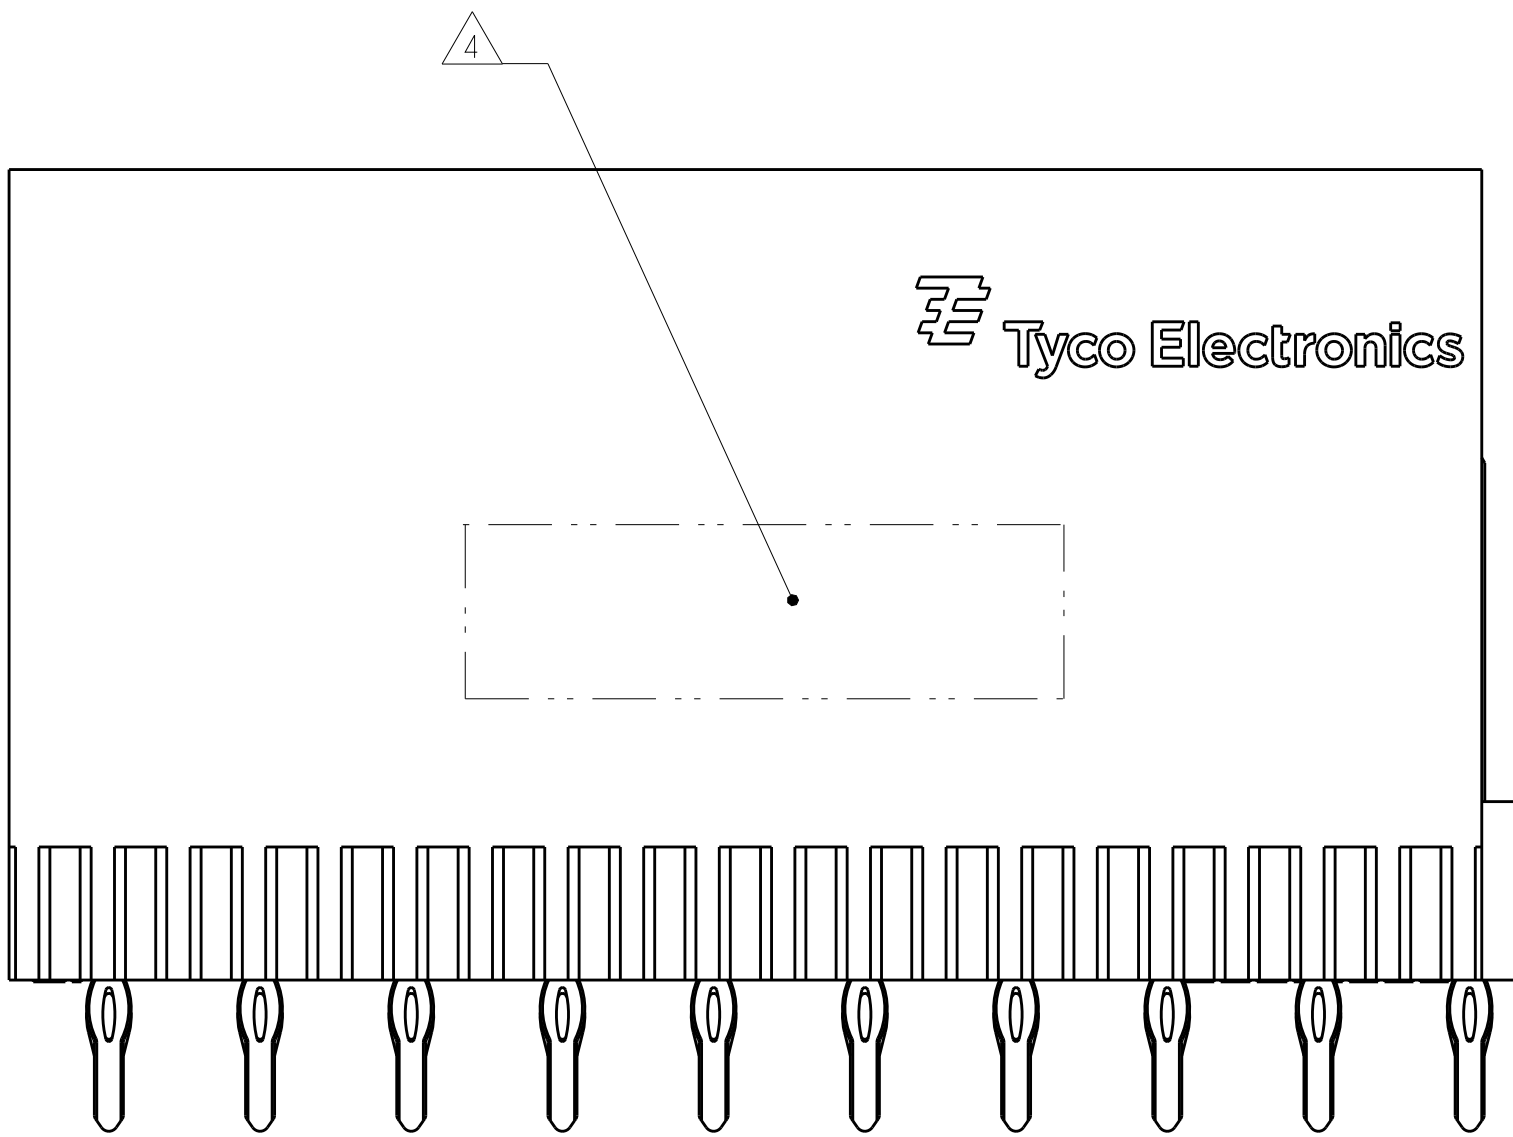


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00		E1	REVISED PER ECO-13-003342	04MAR2013	KH

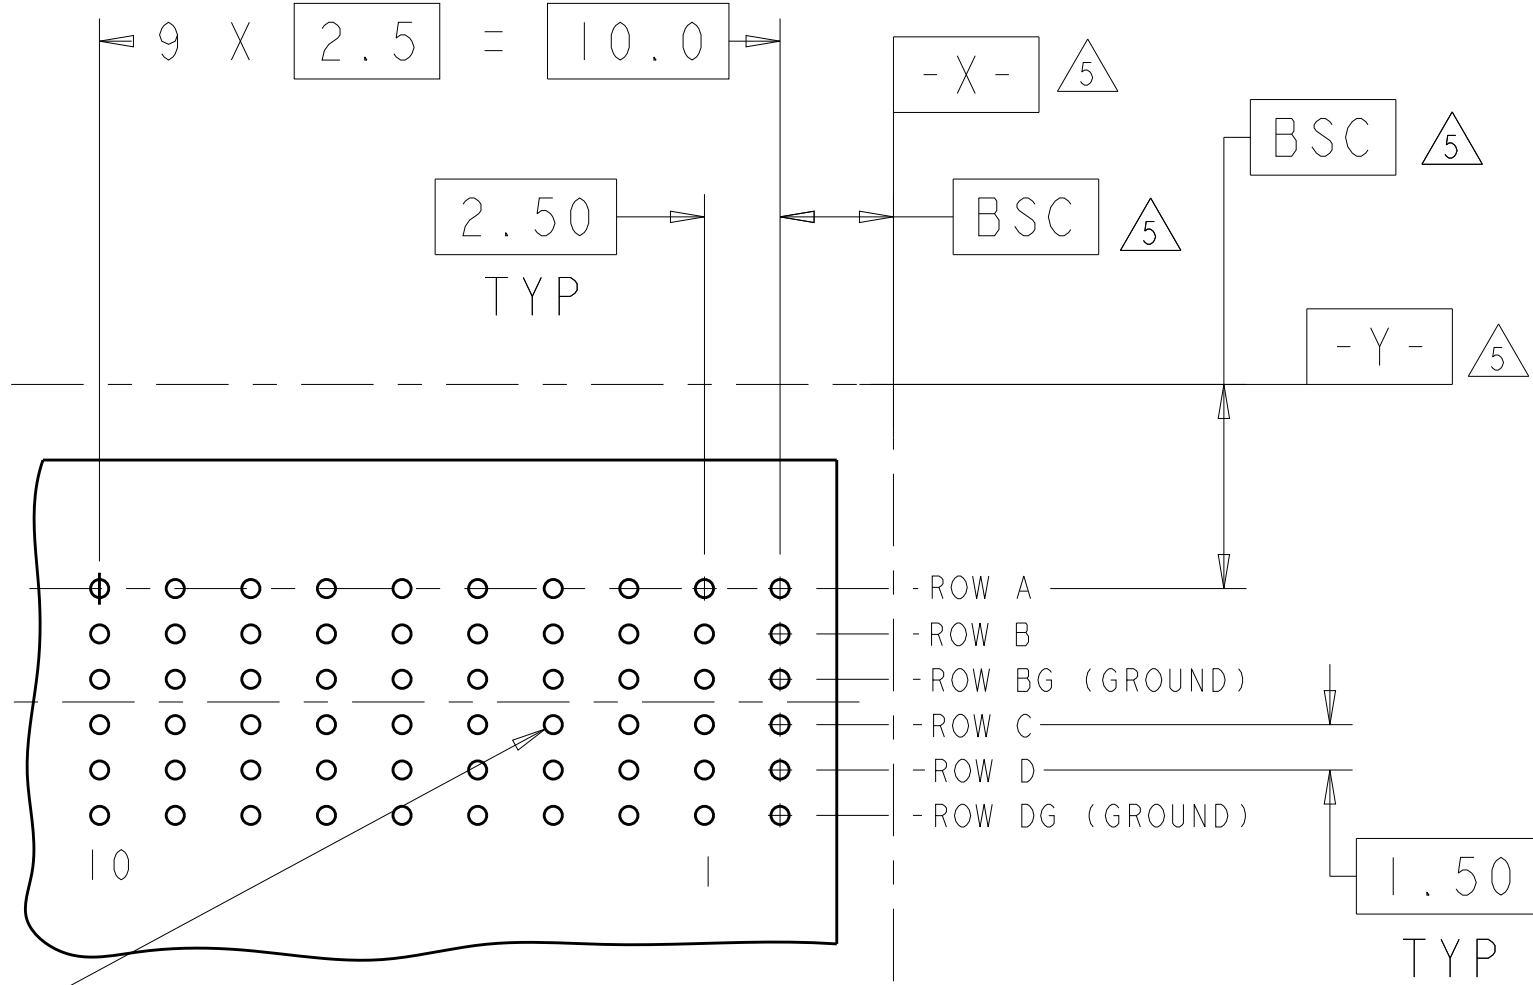

⊕ Ø0.05Ⓢ X Y
ALL PLATED
THRU HOLES

RECOMMENDED PC BOARD
LAYOUT, BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 4:1

- REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
- CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

SUPERSEDED BY 6469025-2	3.80	1469025-2
	5.30	1469025-1
	DIM M	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.S.KLINE 11OCT2000	TE Connectivity	
DIMENSIONS:		CHK R.PATTERSON 16AUG2007		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD N.SCHROLL 13SEP01	NAME	
0 PLC ±	1 PLC ±	PRODUCT SPEC	HEADER ASSEMBLY, 2 PAIR, 2.5mm TAIL, 25mm, HMZd	
2 PLC ±	3 PLC ±	APPLICATION SPEC		
4 PLC ±	ANGLES ±	WEIGHT	SIZE CAGE CODE DRAWING NO	
MATERIAL	FINISH	Customer Drawing	A100779C=1469025	
		SCALE 8:1	SHEET 1 OF 1	