

HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 35mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
 Contact Plating: Au and Sn over Ni
 Shell Material: Zinc Alloy
 Shell Plating: Ni 100u"
 Fixing Material: Phosphor Bronze
 Fixing Plating: Sn over Ni
 Housing Material: PBT+30%G.F(UL94V-0)
 Cover Material: PBT+30%G.F(UL94V-0)

Recommended soldering process:
 Wave Soldering, Peak temperature: 260℃, 5S

Ordering Information

6321-0 XX R D SX M W A 02


No. of Pins
 14P 36P
 20P 50P
 26P

Contact Plating
 S1=3u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin



A=Tray



42.00	30.48	35.40	46.50	52.40	50
33.11	21.59	26.51	37.61	43.51	36
26.76	15.24	20.16	31.26	37.16	26
22.95	11.43	16.35	27.45	33.35	20
19.14	7.62	12.54	23.64	29.54	14
DIM.J	DIM.K	DIM.H	DIM.G	DIM.F	PIN数

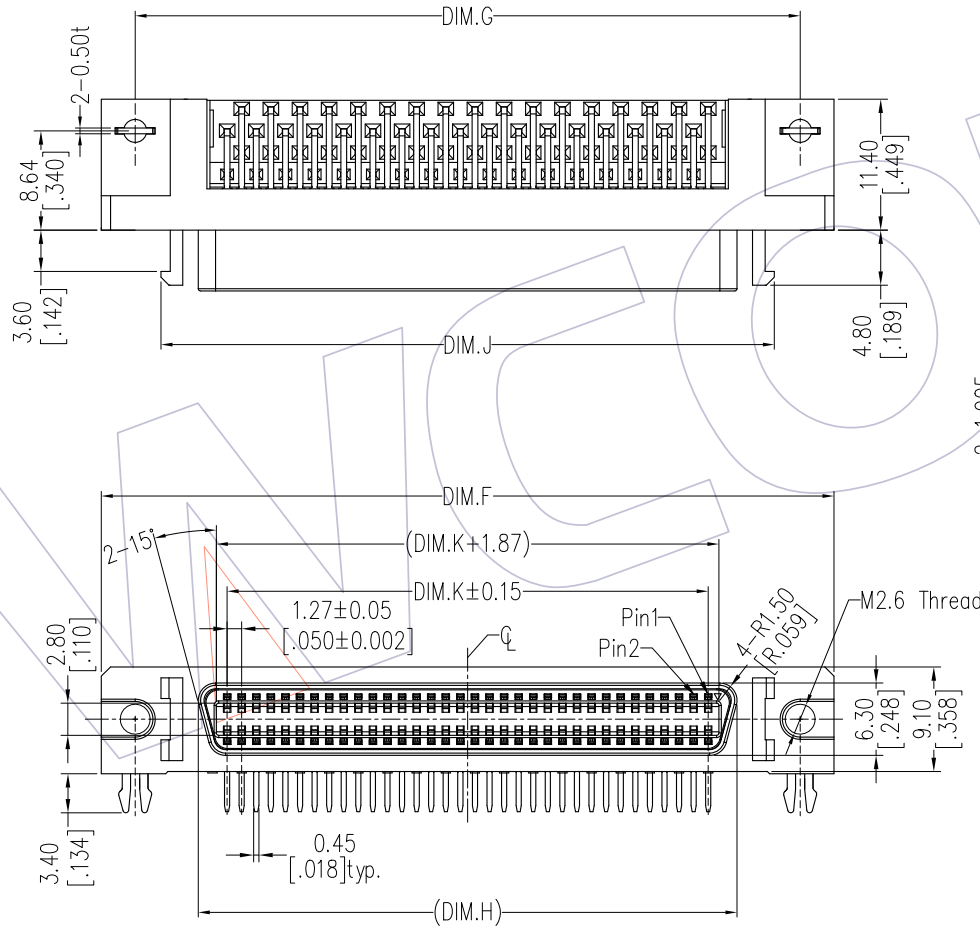

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE ±0.05)

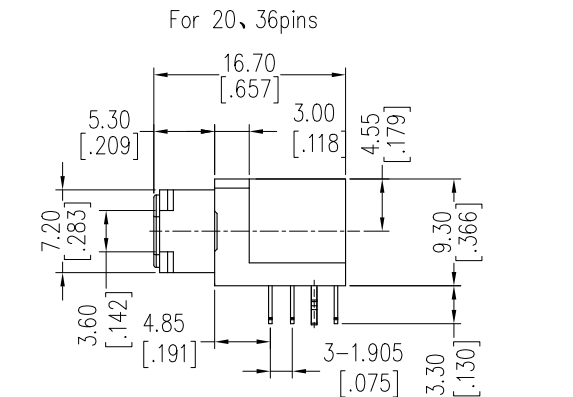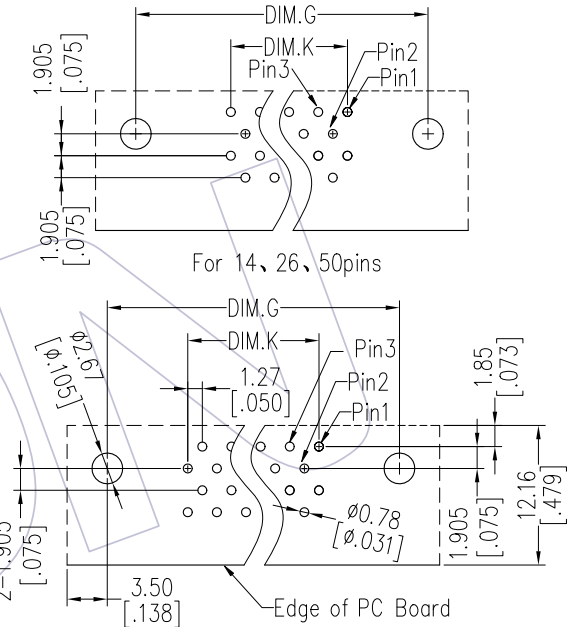

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2016/06/28	Move 68 PIN		x.x ±0.40	JYHuang	2016/06/28	UNIT	mm	6321-0XXRDSXMWA02
A1	2013/08/28	Modify DIM.H	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2013/08/20	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	1.27PITCH CEN TYPE SCSI FEMALE DIP (鱼叉横向)
				Angle ± 3°			PROJ.		Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com