
COLOR TV VERT. DEFELECTION OUTPUT APPLICATION.
COLOR TV CLASS B SOUND OUTPUT APPLICATION.

FEATURES

- High Voltage : V_{CEO}=160V.
- Large Continuous Collector Current Capability.
- Recommended for Vert. Deflection Output & Sound Output Applications for Line Operated TV.
- Complementary to KTA1275.

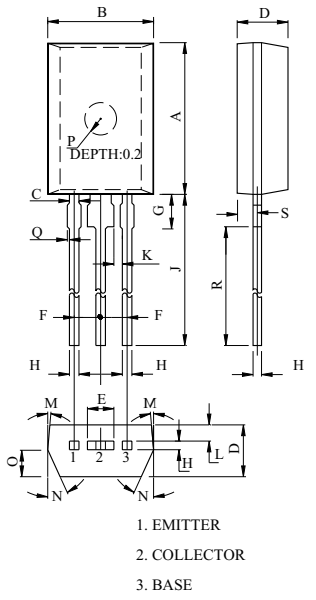

DIM	MILLIMETERS
A	7.20 MAX
B	5.20 MAX
C	0.60 MAX
D	2.50 MAX
E	1.15 MAX
F	1.27
G	1.70 MAX
H	0.55 MAX
J	14.00±0.50
K	0.35 MIN
L	0.75±0.10
M	4°
N	25°
O	1.25
P	Φ1.50
Q	0.10 MAX
R	12.50±0.50
S	1.00

TO-92L

MAXIMUM RATING (Ta=25℃)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	160	V
Collector-Emitter Voltage	V_{CEO}	160	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	1	A
Base Current	I_B	0.5	A
Collector Power Dissipation	P_C	1	W
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-55 150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	V_{CB}=150V, I_E=0	-	-	1.0	μA
Emitter Cut-off Current	I_{EBO}	V_{EB}=6V, I_C=0	-	-	1.0	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=10mA, I_B=0	160	-	-	V
DC Current Gain	h_{FE} (Note)	V_{CE}=5V, I_C=200mA	60	-	320	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=500mA, I_B=50mA	-	-	1.5	V
Base-Emitter Voltage	V_{BE}	V_{CE}=5V, I_C=5mA	0.45	-	0.75	V
Transition Frequency	f_T	V_{CE}=5V, I_C=200mA	20	100	-	MHz
Collector Output Capacitance	C_{ob}	V_{CB}=10V, I_E=0, f=1MHz	-	-	20	pF

Note : h_{FE} Classification R:60 120 O:100 200, Y:160 320


I_C - V_{CE}

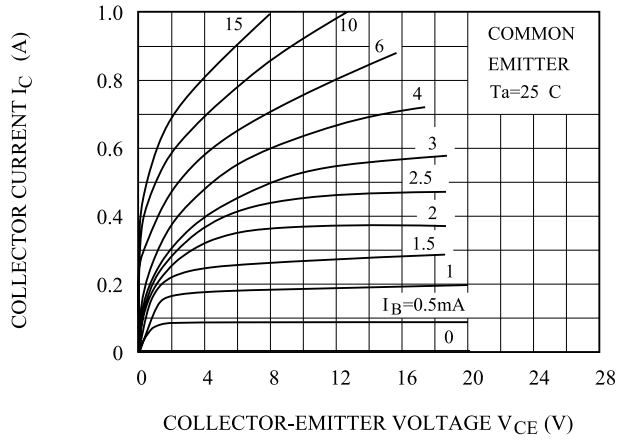


I_C - V_{BE}

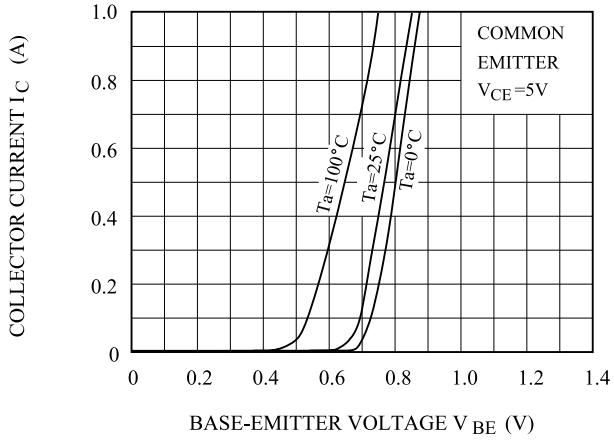


h_{FE} - I_C

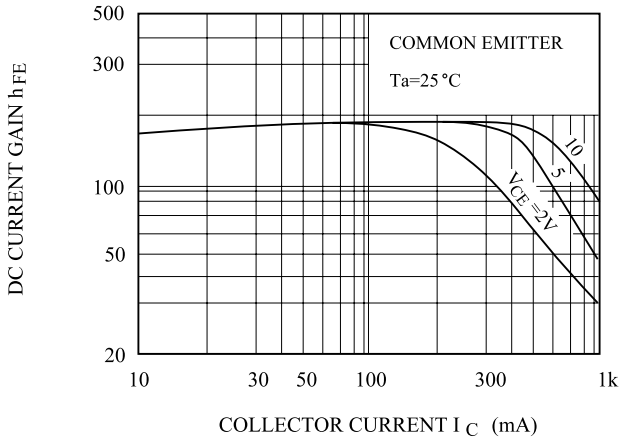


h_{FE} - I_C

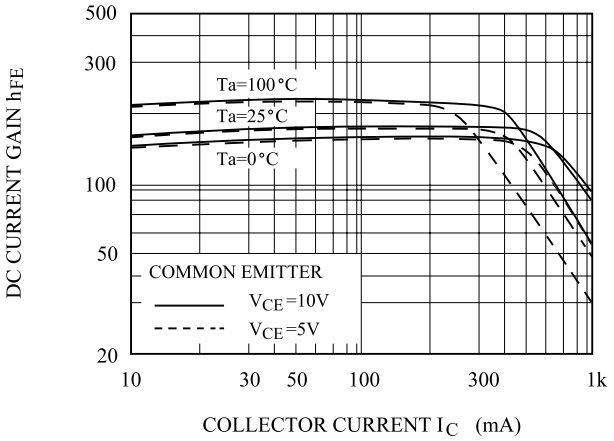


$V_{CE(sat)}$ - I_C

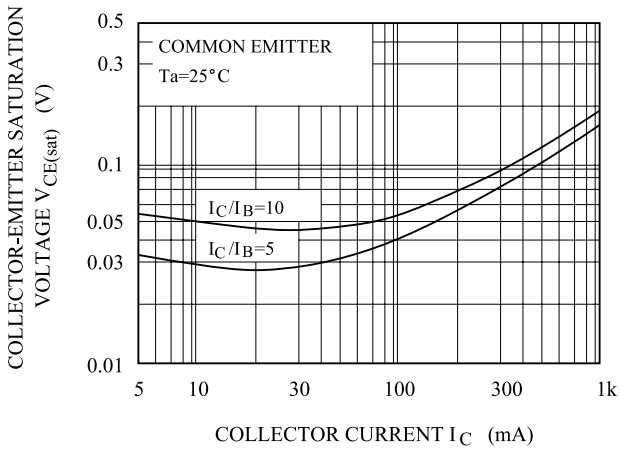


$V_{CE(sat)}$ - I_C

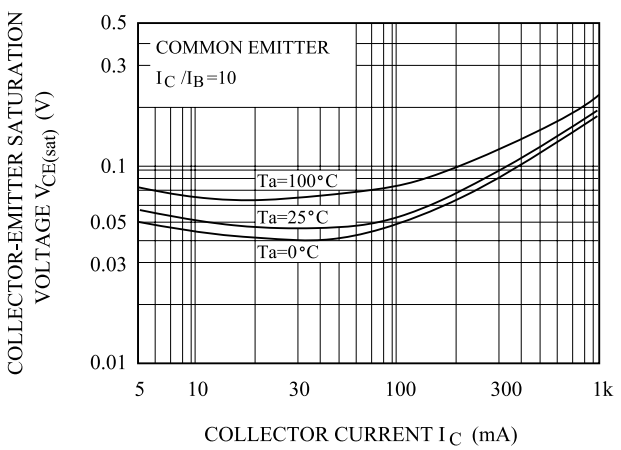


f_T - I_C

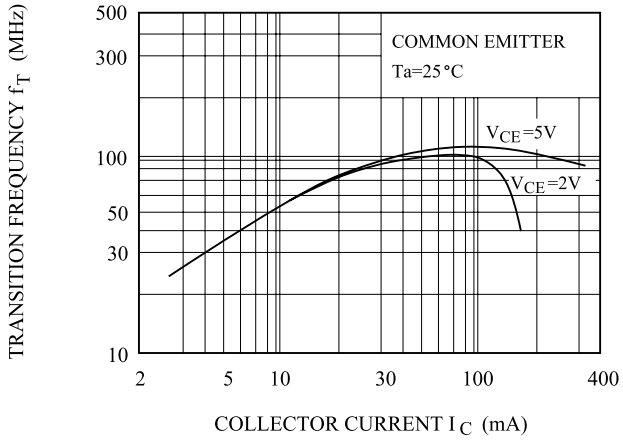

C_{ob} - V_{CB}

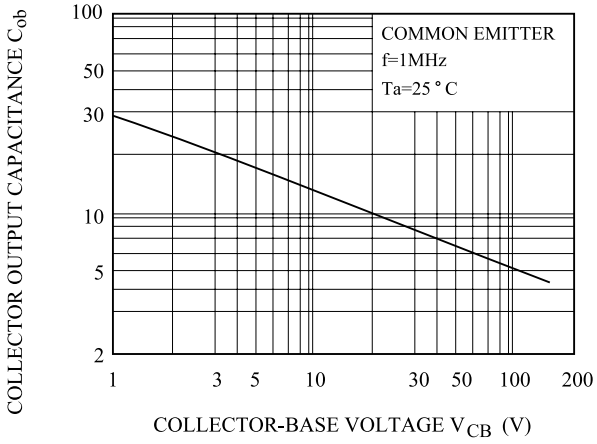

SAFE OPERATING AREA

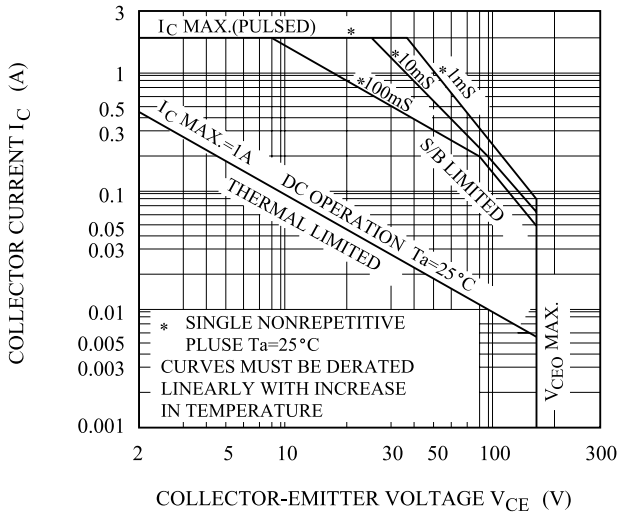

Pc - Ta

