


SHEET OF

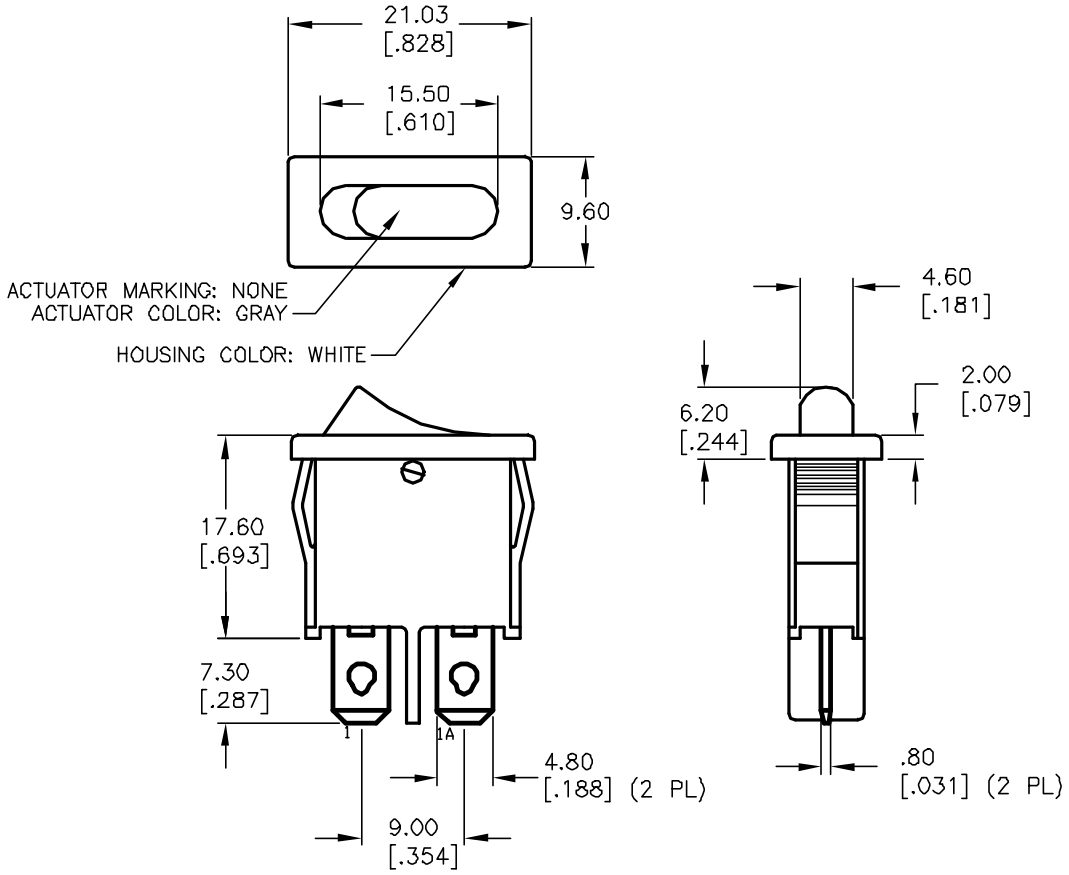




PANEL THICKNESS	X dimension
0.75-1.25 [.030-.049]	19.2 -0.1 [.756]
1.25-2.0 [.049-.079]	19.4 -0.1 [.764]
2.0-3.0 [.079-.118]	19.8 -0.1 [.780]

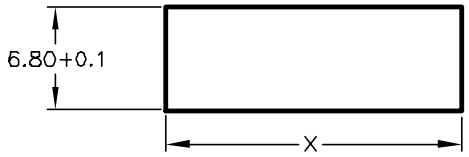


PANEL CUTOUT
NOT TO SCALE

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-1a	OPEN



CIRCUIT: SPST

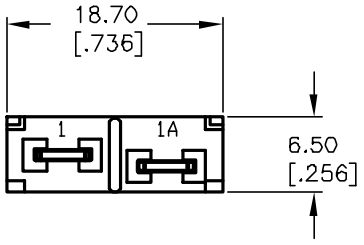

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 4(1)A @250VAC, 6A @250VAC
   10A @125VAC
5. MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING
   CONTACTS: COIN SILVER
6. MECHANICAL LIFE: >50,000 CYCLES
7. ELECTRICAL LIFE: >10,000 CYCLES
8. CONTACT RESISTANCE: < 20 MEGA-OHMS (INITIAL)
9. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
10. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
    >3000V BETWEEN POLES

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13004	RELEASED FOR PRODUCTION	4/7/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: R6AWHTGRYEF

SCALE	DATE	DR	DWG	REV
1.5:1	4/7/03	AR	M060307	A