

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0014564022](#)  
**Status:** **Active**  
**Overview:** [cgrid\\_sl\\_products](#)  
**Description:** 2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version C, Front Ribs, Wire Size 26, 0.76µm (30µ") Gold (Au), 2 Circuits

**Documents:**

[3D Model](#) [Product Specification PS-70400 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**General**

Product Family Ribbon Cable / Wire Trap Connectors  
 Series [70400](#)  
 Comments Terminals Preloaded  
 Component Type Housing  
 Glow-Wire Compliant No  
 Overview [cgrid\\_sl\\_products](#)  
 Product Name SL™


**Physical**

Circuits (Loaded) 2  
 Color - Resin Black  
 Durability (mating cycles max) 50  
 Entry Angle Vertical  
 Flammability 94V-0  
 Lock to Mating Part None  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin Polyester Alloy  
 Number of Rows 1  
 PCB Retention None  
 Packaging Type Tube  
 Pitch - Mating Interface (in) 0.100 In  
 Pitch - Mating Interface (mm) 2.54 mm  
 Plating min: Mating (µin) 30  
 Plating min: Mating (µm) 0.75  
 Plating min: Termination (µin) 75  
 Plating min: Termination (µm) 1.875  
 Polarized to Mating Part Yes  
 Stackable Yes  
 Surface Mount Compatible (SMC) N/A  
 Temperature Range - Operating -40°C to +105°C  
 Termination Interface: Style IDT or Pierce  
 Wire Insulation Diameter 1.35mm (.053") max.  
 Wire Size AWG 26  
 Wire/Cable Type Discrete Wire, Ribbon Cable

**Electrical**

Current - Maximum per Contact 3A  
 Voltage - Maximum 250V

**Material Info**

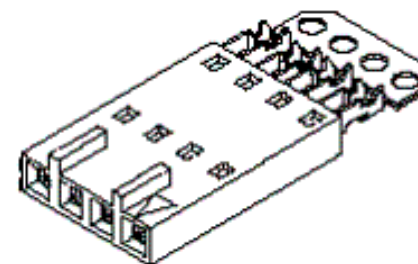

Series

image - Reference only

**EU RoHS**

**ELV and RoHS  
 Compliant**  
**REACH SVHC  
 Not Reviewed**  
**Halogen-Free  
 Status  
 Not Reviewed**

**China RoHS**



**Need more information on product  
 environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[70400Series](#)

**Mates With**

[70544](#), [70546](#), [70554](#) , [70556](#)

**Use With**

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

| Description   | Product #                  |
|---|----------------------------|
| Hawk Semi-Automatic Discrete Wire Terminator for SL - Rebuilt US* | <a href="#">0011201337</a> |

## Reference - Drawing Numbers

Product Specification  
Sales Drawing

PS-70400  
SDA-70400-1261-1284

|  |                   |
|--|-------------------|
| Hawk™ Ribbon<br>Cable Terminator for<br>SL without Break-off                             | <u>0623003000</u> |
| Hawk™ Semi-<br>Automatic Discrete<br>Wire Terminator<br>for SL - Rebuilt CE<br>Approved* | <u>0623004900</u> |
| Hawk™ Flat Flex<br>Cable Terminator for<br>SL with Break-off                             | <u>0623005200</u> |
| Hawk™ Ribbon<br>Cable Terminator<br>with for SL Break-off                                | <u>0623005300</u> |
| IDT Discrete<br>Handtool Module for<br>SL™   | <u>0621000700</u> |
| Hawk™ Semi-<br>Automatic Discrete<br>Wire Terminator for<br>SL                           | <u>0623003100</u> |


This document was generated on 05/21/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# OPTION C

## NOTES:

- TO BE USED WITH (26) AWG. STRANDED WIRE WITH (1.35)/.053 DIA. MAX. INSULATION.
- SEE CHART FOR CIRCUIT SIZES.
- STANDARD PACKAGING PER PK-70400-0001. OPTIONAL PACKAGING MAY BE AVAILABLE, REQUEST DWG. PK-70400
- PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS.
- REFER TO PRODUCT SPECIFICATION: PS-70400.
- SEE DWG. SDA-70400-\*\*\*\* (SHT. 5) FOR OPTIONAL HOUSING DETAILS.
- 4 CIRCUIT SHOWN. 4 - 25 CKT.'S. HAVE (2) RIBS.
- TO MATE WITH MOLEX PART NO.'S.: A-70374-\*\*\*\*, A-70376-\*\*\*\*, A-70390-\*\*\*\*, A-70392-\*\*\*\*, A-70544-\*\*\*\*, A-70554-\*\*\*\*, A-70542-\*\*\*\*, A-70552-\*\*\*\*, A-70546-\*\*\*\*, A-70556-\*\*\*\*.
- 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS.

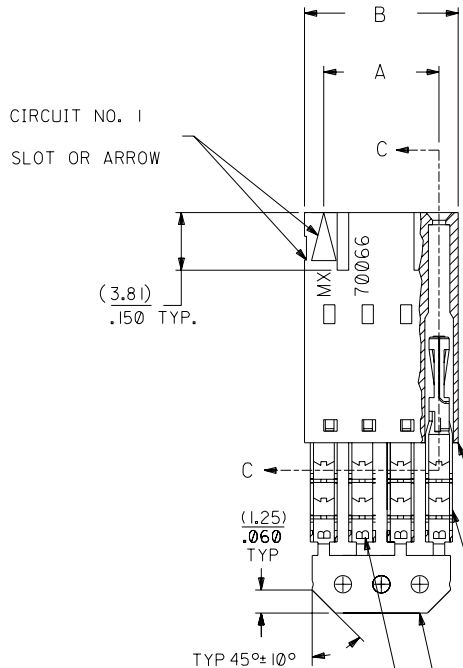

| I.D. SLOT CODE TO WIRE GAUGE CHART |            |
|------------------------------------|------------|
| I.D. SLOT CODE                     | WIRE GAUGE |
| B                                  | 26 AWG.    |


| PLATING CODE (STRIPE ON CARRIER STRIP) |       |
|--|-------|
| PLATING                                | COLOR |
| 30 GOLD                                | RED   |

30 GOLD - .000030 MIN. GOLD IN SELECT AREA WITH .000075 MIN. TIN IN SELECT AREA OVER .000050 MIN. NICKEL OVER-ALL.

\*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.



## SECTION C-C

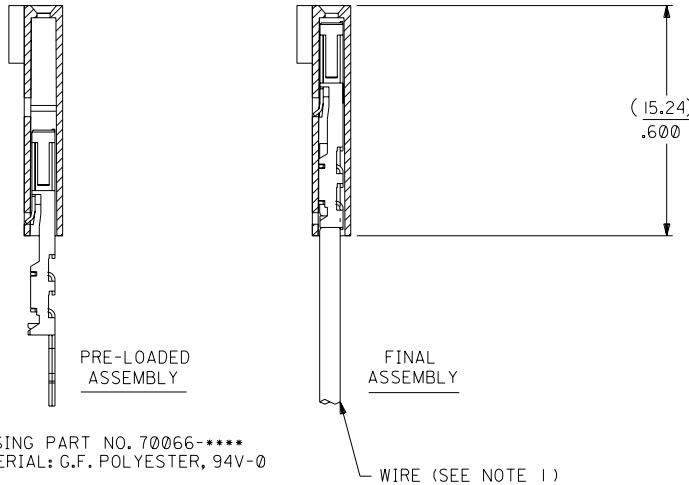

HOUSING PART NO. 70066-\*\*\*\*  
MATERIAL: G.F. POLYESTER, 94V-0

TERMINAL PART NO. 70028-\*\*\*\*  
MATERIAL: PHOSPHOR BRONZE  
PLATING PER ES-88-\*\*\*

WIRE (SEE NOTE 1)

| CKT. SIZE | A                  | B                  | EDP. NO.   | ENG. NO.     |
|-----------|--------------------|--------------------|------------|--------------|
| 2         | ( 2.54 )<br>.100   | ( 5.05 )<br>.199   | 14-56-4022 | A-70400-1261 |
| 3         | ( 5.08 )<br>.200   | ( 7.59 )<br>.299   | 14-56-4032 | A-70400-1262 |
| 4         | ( 7.62 )<br>.300   | ( 10.13 )<br>.399  | 14-56-4042 | A-70400-1263 |
| 5         | ( 10.16 )<br>.400  | ( 12.67 )<br>.499  | 14-56-4052 | A-70400-1264 |
| 6         | ( 12.70 )<br>.500  | ( 15.21 )<br>.599  | 14-56-4062 | A-70400-1265 |
| 7         | ( 15.24 )<br>.600  | ( 17.75 )<br>.699  | 14-56-4072 | A-70400-1266 |
| 8         | ( 17.78 )<br>.700  | ( 20.29 )<br>.799  | 14-56-4082 | A-70400-1267 |
| 9         | ( 20.32 )<br>.800  | ( 22.83 )<br>.899  | 14-56-4092 | A-70400-1268 |
| 10        | ( 22.86 )<br>.900  | ( 25.37 )<br>.999  | 14-56-4102 | A-70400-1269 |
| 11        | ( 25.54 )<br>1.000 | ( 27.91 )<br>1.099 | 14-56-4112 | A-70400-1270 |
| 12        | ( 27.94 )<br>1.100 | ( 30.45 )<br>1.199 | 14-56-4122 | A-70400-1271 |
| 13        | ( 30.48 )<br>1.200 | ( 32.99 )<br>1.299 | 14-56-4132 | A-70400-1272 |
| 14        | ( 33.02 )<br>1.300 | ( 35.53 )<br>1.399 | 14-56-4142 | A-70400-1273 |
| 15        | ( 35.56 )<br>1.400 | ( 38.07 )<br>1.499 | 14-56-4152 | A-70400-1274 |
| 16        | ( 38.01 )<br>1.500 | ( 40.61 )<br>1.599 | 14-56-4162 | A-70400-1275 |
| 17        | ( 40.64 )<br>1.600 | ( 43.15 )<br>1.699 | 14-56-4172 | A-70400-1276 |
| 18        | ( 43.18 )<br>1.700 | ( 45.69 )<br>1.799 | 14-56-4182 | A-70400-1277 |
| 19        | ( 45.72 )<br>1.800 | ( 48.23 )<br>1.899 | 14-56-4192 | A-70400-1278 |
| 20        | ( 48.26 )<br>1.900 | ( 50.77 )<br>1.999 | 14-56-4202 | A-70400-1279 |
| 21        | ( 50.80 )<br>2.000 | ( 53.31 )<br>2.099 | 14-56-4212 | A-70400-1280 |
| 22        | ( 53.34 )<br>2.100 | ( 55.85 )<br>2.199 | 14-56-4222 | A-70400-1281 |
| 23        | ( 55.88 )<br>2.200 | ( 58.39 )<br>2.299 | 14-56-4232 | A-70400-1282 |
| 24        | ( 58.42 )<br>2.300 | ( 60.93 )<br>2.399 | 14-56-4242 | A-70400-1283 |
| 25        | ( 60.96 )<br>2.400 | ( 63.47 )<br>2.499 | 14-56-4252 | A-70400-1284 |

| REV. | DATE | BY | REVISIONS                                       |
|------|------|----|---|
| E    |      |    | REVISED PER ECR NO. U82110 10-17-88 BJS         |
| F    |      |    | LEAD FREE UCP2004-1769 RWHITE 04/03/17          |
| EI   |      |    | ADD CARRIER CHAMF ECR# U80110 05/20/98 LMCGRATH |
|      |      |    | REDRAWN ON CAD ECR# 8842 5/8/86 W.Z.            |
| LTR. |      |    | REVISIONS                                       |

| DIMENSIONS SHOWN (METRIC) INCH                        |                |
|---|----------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2° |                |
| 3 PLACE   | ± .010         |
| 2 PLACE   | ± .014 ± 0.25  |
| 1 PLACE   | ± 0.35         |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS  |                |
| DRWG. BY: WAZ   | CHK'D. BY: WAZ |
| APP'D. BY:  | SCALE: 4:1     |

| REVISE ONLY ON CAD SYSTEM                      |  |
|--|--|
| TITLE  | ASSEMBLY, SL CONNECTOR (SINGLE ROW- (2.54)/.100 GRID)  |
| MOLEX INCORPORATED<br>LITSE, ILL. 60532 U.S.A. | SHEET NO. 10 / 10 / 84   |
| PART NO. SDA-70400-1261-1284                   | DRWG. NO. SDA-70400-1261-1284  |
| FILE NAME: S10400CXB                           | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. |
| DA   | C  |