


■ Features

- High luminous Flux LEDs
- 4.8mm Straw Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

■ Applications

- Backlighting (illuminated advertising etc.)
- Substitution of Micro Incandescent Lamps
- Reading Lamps / Emergency Lighting
- Marker lights (e.g. steps, exit ways, etc.)
- Other Lighting

■ Outline Dimension

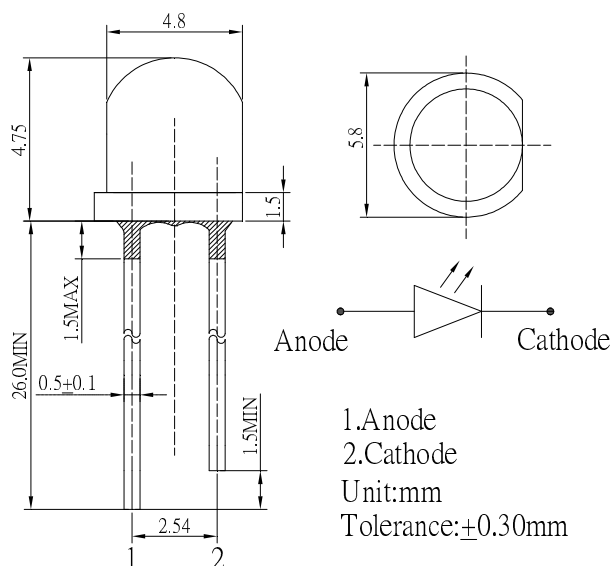


■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	I_F	75	mA
Pulse Forward Current*	I_{FP}	120	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	255	mW
Operating Temperature	T_{opr}	-30 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T_{sol}	260°C/5sec	-

*Pulse width Max 10ms , Duty ratio max 1/10

■ Directivity

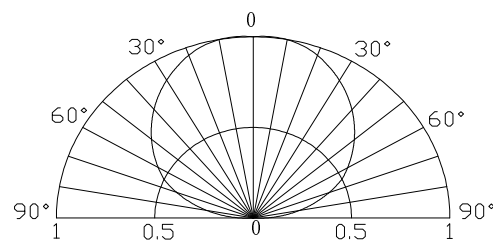

■ Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	$I_F=60$ mA	2.8	3.0	3.4	V
DC Reverse Current	I_R	$V_R=15$ V	-	-	10	μ A
Luminous Flux	Φ_v	$I_F=60$ mA	22	25	-	lm
Luminous Intensity	I_v	$I_F=60$ mA	5000	5800	-	mcd
Color Temperature	CCT	$I_F=60$ mA	5500	6500	8500	K
Chromaticity Coordinates*	x	$I_F=60$ mA	-	0.31	-	
	y	$I_F=60$ mA	-	0.33	-	
50% Power Angle	$2\theta_{1/2}$	$I_F=60$ mA	-	130	-	deg

*1 Luminous Intensity Measurement allowance is $\pm 15\%$

*2 Chromaticity Coordinates Measurement allowance is $\pm 10\%$