

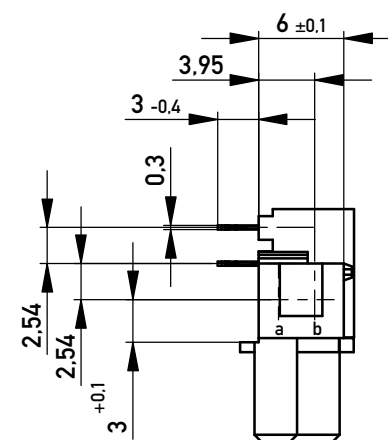
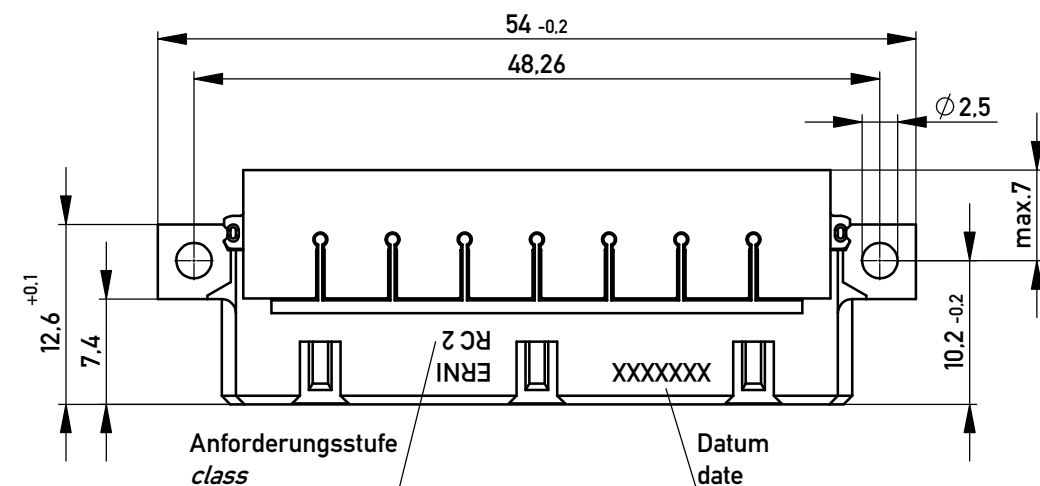
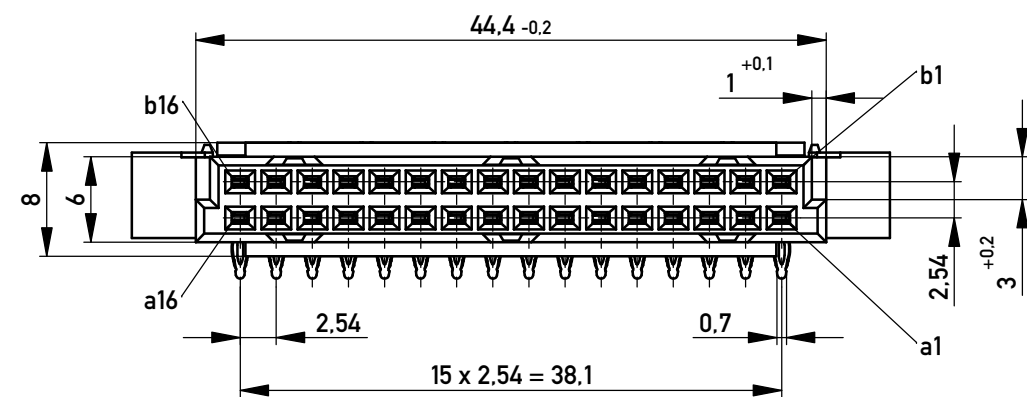


Bestückungsplan / contact layout

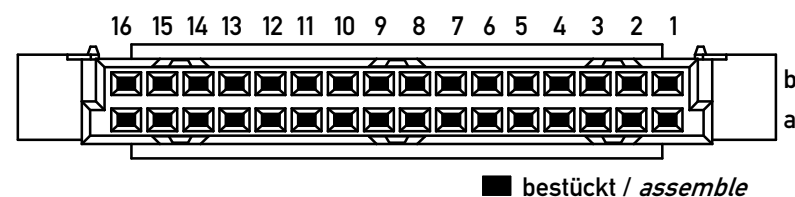


Leiterplatten-Lochbild / PCB drillhole pattern

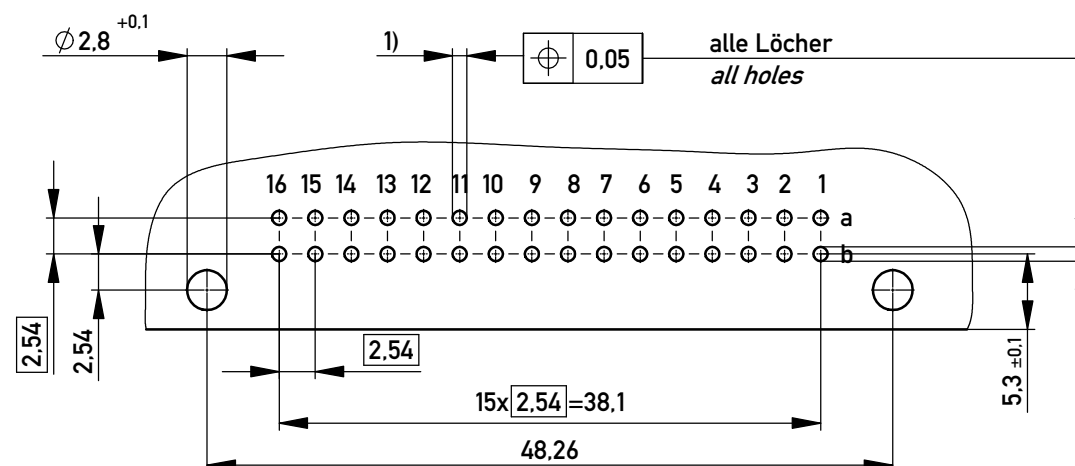

Elastische Einpresszone / *compliant pressfit zone*
 Isolierwerkstoff / *housing material: PBT GF30*
 Bauart 7 / *type 7*
 Anforderungsstufe 2 = 400 Steckzyklen / *class 2 = 400 mating cycles*
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6
diameter of drilled hole see drawing 164062/No.6
 1) $\phi 1,0^{+0,09}_{-0,06}$ Durchmesser des metallisierten Loches
 $\phi 1,0^{+0,09}_{-0,06}$ diameter of finished plated-through hole

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 2:1				
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation						
						Federleiste Q/2 32 EE <i>female conn. Q/2 32 pressfit</i>						
				b		13.12.2011				www.ERNI.com		100301120001
Index		Date						Class		STVQ/2		A3