


TERMINAL BLOCKS

3.81MM PITCH ULTRA LOW PROFILE

- 3.81mm Pitch
- Professional rising clamp
- 2 - 12 pole interlocking
- 0.75mm² wire acceptance
- UL/CE approved
- Colour green

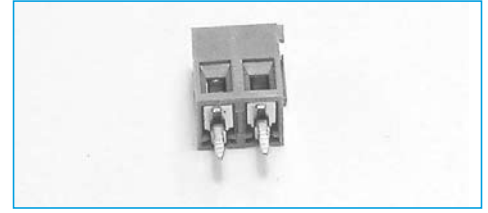

SPECIFICATION


Electrical Characteristics

Rating Current: 9A/130Vac
Contact Resistance: 1.5kV/60sec
Insulation Resistance: ≥ 5MΩ
Operating Temperature: -20°C to +125°C
Short Period: 160°C

Moulding: UL94-V0 flame retardant PA66
Pin/terminal: 5μ tinned, nickel plated brass
Rising clamp: Nickel Plated brass
Screw/torque: M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

ORDERING INFORMATION

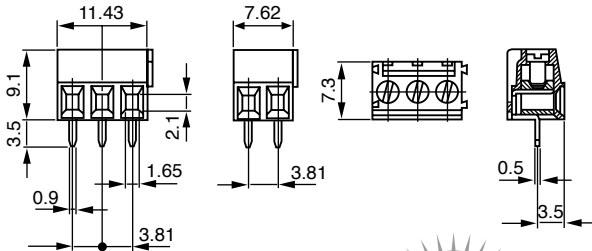

DBC	TB	40	/2
Dubilier Connectors	Series Terminal Blocks	Style	No of Ways
			2 = 2ways 3 = 3ways
* other number of ways are available Please consult the office for further details			

TERMINAL BLOCKS



- 3.81mm Pitch
- Ultra Low Profile
- Flame Retardant Material
- 0.75mm² wire acceptance
- UL/ CSA approved
- Interlocking
- Professional rising clamp

3.81mm PITCH 90° MOUNT




SPECIFICATION

Rating: 9A/130V
Dielectric Strength: 1.5KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated brass
Wire protector: Nickel plated brass
Screw/torque: M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

ORDERING INFORMATION

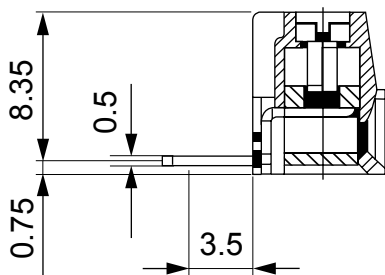

DBC	TB	83	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
			2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			