Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



The figure shows a 10-position version of the product

Plug component, Nominal current: 6 A, Rated voltage (III/2): 200 V, Number of positions: 5, Pitch: 3.81 mm, Connection method: Insulation displacement connection QUICKON, Color: green, Contact surface: Tin

Why buy this product

- Reduced wiring time since conductor pretreatment is no longer necessary
- Stranded conductors from 0.34 to 0.5 mm² with PVC or PE insulation
- Connection according to EN 60352-4
- Integrated 1.2 mm Ø test connection

Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 192 (CC-2011)
GTIN	4 017918 164928
Custom tariff number	85366990
Country of origin	POLAND

Technical data

Dimensions / positions

Pitch	3.81 mm
Dimension a	15.24 mm
Number of positions	5

Technical data

Range of articles	QC 0,5/..-ST
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	200 V

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Technical data

Technical data

Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current IN	6 A
Nominal voltage UN	200 V
Nominal cross section	0.5 mm²
Maximum load current	6 A (with 0.5 mm2 conductor cross section)
Insulating material	PA
Inflammability class according to UL 94	V0
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	6 A
Nominal voltage, UL/CUL Use Group C	300 V
Nominal current, UL/CUL Use Group C	6 A

Connection data

Conductor cross section stranded min.	0.34 mm²
Conductor cross section stranded max.	0.5 mm²
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	20
Minimum AWG according to UL/CUL	24
Maximum AWG according to UL/CUL	20

Classifications

eclass

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402

etim

ETIM 3.0	EC001121
ETIM 4.0	EC002638
ETIM 5.0	EC002638

unspsc

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Approvals

Approvals

Approvals

UL Recognized / VDE report with production monitoring / cUL Recognized / GOST / IECEE CB Scheme / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized

	B	C
mm²/AWG/kcmil	24-20	24-20
Nominal current IN	6 A	6 A
Nominal voltage UN	300 V	300 V

VDE report with production monitoring

mm²/AWG/kcmil	0.34-0.5
Nominal current IN	5 A
Nominal voltage UN	320 V

cUL Recognized

	B	C
mm²/AWG/kcmil	24-20	24-20
Nominal current IN	6 A	6 A
Nominal voltage UN	300 V	300 V

GOST

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Approvals

IECEE CB Scheme	
mm²/AWG/kcmil	0.34-0.5
Nominal current IN	5 A
Nominal voltage UN	320 V

GOST

cULus Recognized

Accessories

Accessories

Marking

Marker cards - SK 3,81/2,8:FORTL.ZAHLEN - 0804109

Marker cards, Card, white, Labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, For terminal block width: 3.81 mm

Tools

Screwdriver - SZS 0,4X2,0 - 1205202

Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap

Additional products

Base strip - MCO 1,5/ 5-GL-3,81 - 1861756

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Accessories

Base strip - MCO 1,5/ 5-GR-3,81 - 1861675

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

---

Base strip - MCDV 1,5/ 5-G1-3,81 - 1847754

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCDV 1,5/ 5-G-3,81 - 1830431

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCD 1,5/ 5-G1-3,81 - 1843101

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCD 1,5/ 5-G-3,81 - 1829989

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Printed-circuit board connector - IMC 1,5/ 5-ST-3,81 - 1857919

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Accessories

Base strip - MCVK 1,5/ 5-G-3,81 - 1832769

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Connection method: Screw connection, Color: green, Contact surface: Tin, Assembly: DIN rail

Base strip - MCVDU 1,5/ 5-G-3,81 - 1837463

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Base strip - MCV 1,5/ 5-G-3,81 - 1803455

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Base strip - MC 1,5/ 5-G-3,81 - 1803303

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Base strip - MC 1,5/ 5-G-3,81 THT - 1908790

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: Black, Contact surface: Tin, Assembly: SMD/THT/THR, User information and design recommendations on through hole reflow technology can be found at: http://www.combicon.com

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Accessories

Base strip - SMC 1,5/ 5-G-3,81 - 1827305

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Soldering

Base strip - EMCV 1,5/ 5-G-3,81 - 1860676

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Press-in

Base strip - EMC 1,5/ 5-G-3,81 - 1897830

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Assembly: Press-in

Drawings

Dimensioned drawing

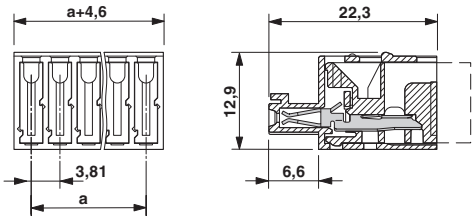

Printed-circuit board connector - QC 0,5/ 5-ST-3,81 - 1897429

Diagram

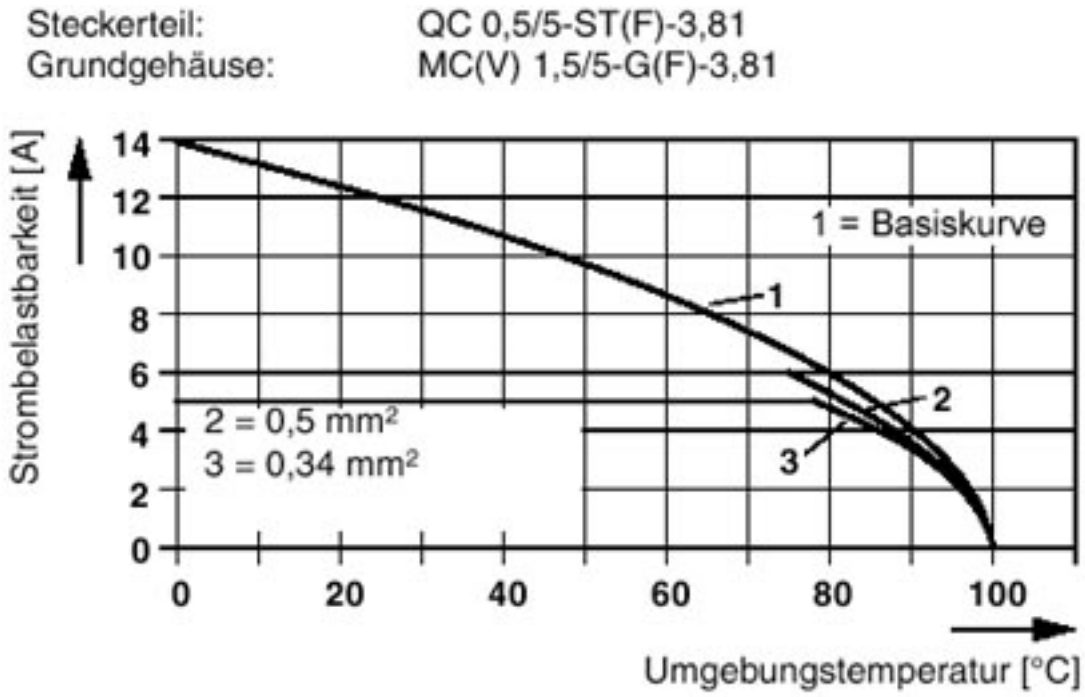

© Phoenix Contact 2012 - all rights reserved
http://www.phoenixcontact.com