


features

- Surface mount
- Operating temperature: -40°C ~ +125°C
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

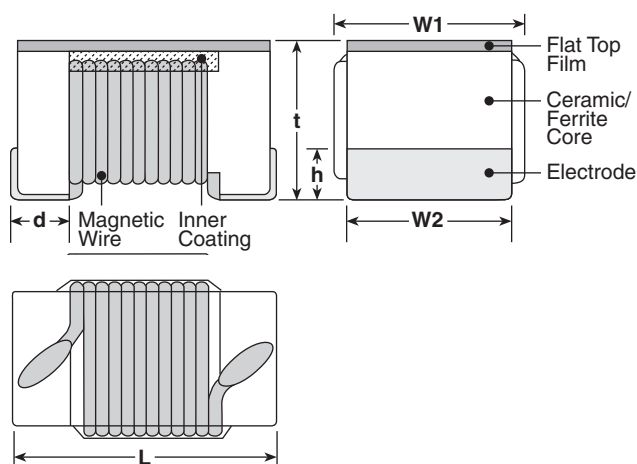

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+.008} ₋₀ (1.8 ^{+.02} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Inductance 3 digits: 10N: 10nH R10: 0.1μH 1R0: 1.0μH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360	
KQT0402T**1N9*		1.9					9600	0.070	1040	
KQT0402T**2N0*		2.0			19					
KQT0402T**2N2*		2.2			8000		0.068	960		
KQT0402T**2N4*		2.4					18	0.120	700	
KQT0402T**2N7*		2.7		H: ±3% J: ±5% K: ±10%	17		7200	0.066	840	
KQT0402T**3N3*		3.3			19		6000	0.091	800	
KQT0402T**3N6*		3.6								
KQT0402T**3N9*		3.9			18		5800	0.083	760	
KQT0402T**4N3*		4.3								
KQT0402T**4N7*		4.7			20		4800	0.086	680	
KQT0402T**5N1*		5.1					5800	0.104		
KQT0402T**5N6*		5.6			22		4400	650		
KQT0402T**6N2*		6.2					4160		0.104	
KQT0402T**6N8*		6.8			20		4000	0.150	650	
KQT0402T**7N5*		7.5					3900	0.195	480	
KQT0402T**8N2*		8.2			21		3680	0.120	640	
KQT0402T**8N7*		8.7					3600			
KQT0402T**9N0*		9.0			24		3450	0.180	560	
KQT0402T**9N5*		9.5					3280	0.172		
KQT0402T**10N*		10			25		3100	0.200	500	
KQT0402T**11N*		11					3040	0.202		
KQT0402T**12N*		12			24		3000	0.250	450	
KQT0402T**13N*		13					2800	0.323		
KQT0402T**15N*		15			25		2720	0.214	400	
KQT0402T**16N*		16					2700	0.322		
KQT0402T**18N*		18			24		2480	0.298		
KQT0402T**19N*		19					2400	0.354		
KQT0402T**20N*		20			25			0.393		
KQT0402T**22N*		22			2320		0.550	340		
KQT0402T**23N*		23			24		2300	0.560	320	
KQT0402T**24N*		24					2240	0.620	300	
KQT0402T**27N*		27			25		2200	0.810	300	
KQT0402T**30N*		30					2100	0.830	150	
KQT0402T**33N*		33			20			0.835	240	
KQT0402T**34N*		34			25		2800	1.170	200	
KQT0402T**36N*		36					2000	1.120		
KQT0402T**39N*		39			22		1800	1.810	140	
KQT0402T**40N*		40					1600	2.090	130	
KQT0402T**43N*		43			25		1500	2.320	120	
KQT0402T**47N*		47								
KQT0402T**51N*		51								
KQT0402T**56N*		56								
KQT0402T**68N*		68								
KQT0402T**82N*		82								
KQT0402T**R10*		100								
KQT0402T**R12*		120								

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/11

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9						0.08	
KQ0603TTE4N3*	F	4.3			20		5900	0.063	
KQ0603TTE4N7*	G	4.7					5800	0.116	
KQ0603TTE5N1*	Y	5.1			0.115				
KQ0603TTE6N8*	2	6.8		27	0.11				
KQ0603TTE7N5*	H	7.5		28	4800		0.106		
KQ0603TTE8N2*	A	8.2			4600		0.12		
KQ0603TTE8N7*	J	8.7					0.109		
KQ0603TTE9N5*	B	9.5		4800	0.125				
KQ0603TTE10N*	3	10			0.13				
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		35	0.17				
KQ0603TTE16N*	L	16			34		3300	0.104	
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22		38	3000		0.19		
KQ0603TTE23N*	S	23		37	2700		0.15		
KQ0603TTE24N*	M	24			2650		0.135		
KQ0603TTE27N*	8	27		40	2800		0.22	600	
KQ0603TTE30N*	N	30	37	2250	0.144				
KQ0603TTE33N*	9	33	40	2300	0.22				
KQ0603TTE36N*	P	36	38	2080	0.25				
KQ0603TTE39N*	0	39	40	2200					
KQ0603TTE43N*	Q	43	39	2000	0.28				
KQ0603TTE47N*	1	47	38		200		0.30		
KQ0603TTE51N*	T	51		1900	0.31				
KQ0603TTE56N*	2	56	37	1700	0.34				
KQ0603TTE68N*	3	68			0.49	400			
KQ0603TTE72N*	4	72	34	150			0.54		
KQ0603TTE82N*	5	82		1400	0.58				
KQ0603TTER10*	6	100	32	150	1350	0.61	300		
KQ0603TTER11*	7	110			1300	0.65			
KQ0603TTER12*	8	120			1400	1.4	160		
KQ0603TTER15*	9	150	25	100	1300	2.2	140		
KQ0603TTER18*	0	180			1200	2.3	130		
KQ0603TTER20*	U	200	2.5			120			
KQ0603TTER21*	V	210	1000		2.4				
KQ0603TTER22*	1	220	24		900	2.3	170		
KQ0603TTER25*	W	250			840	3.17	110		
KQ0603TTER27*	2	270			800	3.0	100		
KQ0603TTER30*	X	300	30		50	700	3.7	80	
KQ0603TTER33*	3	330		640		1.21	190		
KQ0603TTER39*	4	390	610	1.26		170			
KQ0603TTER47*	5	470	50	J: ±5% K: ±10%					
KQ0603TTER51*	V	510							

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)				
KQ0603TTER56*	6	560	50	J: ±5% K: ±10%	30	50	560	2.09	130				
KQ0603TTER62*	W	620					590	1.89	150				
KQ0603TTER68*	7	680					540	1.97	140				
KQ0603TTER75*	X	750					530	2.04	130				
KQ0603TTER82*	8	820					490	3.09	110				
KQ0603TTER91*	Y	910					480	2.95	120				
KQ0603TTE1R0*	9	1000					440	5.13	90				
KQ0603TTE1R2*	0	1200					400	5.45	80				
KQ0805TTE3N3*	0	3.3	250	G: ±2% J: ±5% K: ±10%	50	1500	6000	0.08	600				
KQ0805TTE6N8*	1	6.8				1000	5500	0.11					
KQ0805TTE8N2*	2	8.2				500	4700	0.12		500			
KQ0805TTE12N*	3	12					4000	0.15					
KQ0805TTE15N*	4	15					3400	0.17					
KQ0805TTE18N*	5	18					3300	0.20					
KQ0805TTE20N*	Y	20			55		2600	0.22					
KQ0805TTE22N*	6	22					2500	0.25					
KQ0805TTE27N*	7	27				60	2050	0.27					
KQ0805TTE33N*	8	33					2000	0.29					
KQ0805TTE39N*	9	39					1650	0.34					
KQ0805TTE43N*	4	43			0.31								
KQ0805TTE47N*	0	47			200		1550	0.34					
KQ0805TTE56N*	1	56				1450	0.38						
KQ0805TTE68N*	2	68				1300	0.42						
KQ0805TTE82N*	3	82				1200	0.46						
KQ0805TTER10*	4	100	150		65	250	1100	0.51	400				
KQ0805TTER12*	5	120					920	0.56					
KQ0805TTER15*	6	150	100		50	870	0.64						
KQ0805TTER16*	H	160						850		0.70			
KQ0805TTER17*	J	170					350						
KQ0805TTER18*	7	180						48	650	1.0			
KQ0805TTER19*	D	190									600	1.4	
KQ0805TTER20*	E	200											560
KQ0805TTER21*	F	210					375						
KQ0805TTER22*	8	220						340	1.9				
KQ0805TTER23*	K	230								188	2.2		
KQ0805TTER24*	L	240										215	2.35
KQ0805TTER25*	G	250		4100	0.08								
KQ0805TTER27*	9	270				3300	0.09						
KQ0805TTER33*	0	330						3000	0.10				
KQ0805TTER39*	1	390								2500	0.11		
KQ0805TTER47*	2	470		2400	0.12								
KQ0805TTER56*	3	560				1600	0.13						
KQ0805TTER68*	4	680	27N					27					
KQ0805TTER82*	5	820							27N	27			
KQ1008TTE10N*	10N	10		27N	27								
KQ1008TTE12N*	12N	12				27N	27						
KQ1008TTE15N*	15N	15	27N					27					
KQ1008TTE18N*	18N	18							27N	27			
KQ1008TTE22N*	22N	22		27N	27								
KQ1008TTE27N*	27N	27				27N	27						
KQ0805TTER47*	2	470	25					J: ±5% K: ±10%			33	100	375
KQ0805TTER56*	3	560							23	50			340
KQ0805TTER68*	4	680		188	2.2								190
KQ0805TTER82*	5	820		215	2.35	180							
KQ1008TTE10N*	10N	10	50	J: ±5% K: ±10% M: ±20%	50	500	4100	0.08			1000		
KQ1008TTE12N*	12N	12					3300	0.09					
KQ1008TTE15N*	15N	15					3000	0.10					
KQ1008TTE18N*	18N	18			55	350	2500	0.11					
KQ1008TTE22N*	22N	22					2400	0.12					
KQ1008TTE27N*	27N	27					1600	0.13					

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com
Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ1008TTE33N*	33N	33	50	J: ±5% K: ±10% M: ±20%	60	350	1600	0.14	1000
KQ1008TTE39N*	39N	39			65		1500	0.15	
KQ1008TTE47N*	47N	47					1300	0.16	
KQ1008TTE56N*	56N	56						0.18	
KQ1008TTE68N*	68N	68						0.20	
KQ1008TTE82N*	82N	82						0.22	
KQ1008TTER10*	R10	100	25	G: ±2% J: ±5% K: ±10%		60	1000	0.56	650
KQ1008TTER12*	R12	120			950	0.63			
KQ1008TTER15*	R15	150			45	100	850	0.70	580
KQ1008TTER18*	R18	180					750	0.77	620
KQ1008TTER22*	R22	220					700	0.84	500
KQ1008TTER27*	R27	270					600	0.91	500
KQ1008TTER33*	R33	330					570	1.05	450
KQ1008TTER39*	R39	390					500	1.12	470
KQ1008TTER47*	R47	470					450	1.19	
KQ1008TTER56*	R56	560					415	1.33	400
KQ1008TTER62*	R62	620					375	1.40	300
KQ1008TTER68*	R68	680						1.47	400
KQ1008TTER75*	R75	750					360	1.54	360
KQ1008TTER82*	R82	820					350	1.61	400
KQ1008TTER91*	R91	910			35	50	320	1.68	380
KQ1008TTE1R0*	1R0	1000					290	1.75	370
KQ1008TTE1R2*	1R2	1200					250	1.6	310
KQ1008TTE1R5*	1R5	1500					200	1.7	300
KQ1008TTE1R8*	1R8	1800			28	160	1.9	270	
KQ1008TTE2R2*	2R2	2200					2.2	250	
KQ1008TTE2R7*	2R7	2700			22	140	2.3		
KQ1008TTE3R3*	3R3	3300					110	2.7	230
KQ1008TTE3R9*	3R9	3900			20	100	2.8		
KQ1008TTE4R7*	4R7	4700				90	3.1	210	
KQ1008TTE5R6*	5R6	5600	15	7.9	80	2.5	240		
KQ1008TTE6R8*	6R8	6800			70	2.8	200		
KQ1008TTE8R2*	8R2	8200			65	2.5	170		
KQ1008TTE100*	100	10000			60	3.4	150		

* Add tolerance character (C, G, H, J, K, M)

environmental applications

Performance Characteristics

Parameter	Requirements Maximum Δ L/L		Test Method
	Limit	Typical	
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7% Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1% Δ Q/Q: ±5.3%	-40°C (30min.) / +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9% Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10